



Z1400-B


FLOOR CLEANOUT WITH "TYPE B" COVER AND EZ1™ TECHNOLOGY

SPECIFICATION SHEET

TAG _____

**PATENT
PENDING**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

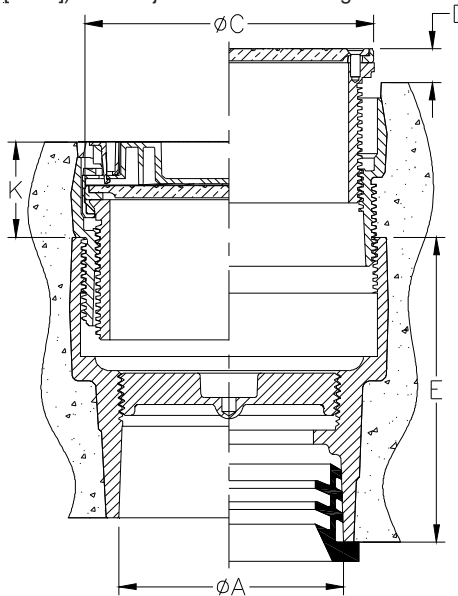

| Dimensions in Inches [mm] | | | | | | | Approx. Wt. Lbs [kg] |
|---------------------------|-------------------|--------------|-----|------------|--------------|--------------|----------------------|
| A Pipe Size | Cover Designation | C | D | | K | | |
| | | | Min | Max | Min | Max | |
| 2 [51] | -5B | 5-5/32 [131] | 0 | 1 [25] | 1-23/32 [44] | 2-15/16 [75] | 10 [5] |
| 3-4 [76-102] | | 5-5/32 [131] | 0 | 1 [25] | 1-23/32 [44] | 2-15/16 [75] | 12 [5] |
| 2 [51] | -6B | 6-8/32 [156] | 0 | 31/32 [25] | 1-11/16 [43] | 2-27/32 [72] | 11 [5] |
| 3-4 [76-102] | | 6-8/32 [156] | 0 | 31/32 [25] | 1-11/16 [43] | 2-27/32 [72] | 13 [6] |
| 6 [152] | -8B | 7-7/8 [200] | 0 | 1 [25] | 1-7/8 [48] | 3-1/32 [77] | 19 [9] |

ENGINEERING SPECIFICATION: ZURN Z1400-BZ1 cleanout, Dura-Coated cast iron body with bottom outlet, with gas and water tight threaded ABS tapered plug, and top assembly. EZ1™ drainage series is engineered to simplify product installation and comprised of concrete shield to provide up to 1" [25] of vertical post pour adjustment, pre-packaged shims for tilt correction, and integrated, self-contained "Type B" light duty scoriated cover with rough-in cover for protection during concrete pour. Cleanout is designed in accordance with ASME A112.36.2M.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

- 2-3 [51-76]
- 4 [102]
- 6 [152]
- 2-4 [51-102]
- 3 [76]
- 6 [152]

(Specify size/type) **OUTLET**

- ___ NH No-Hub
- ___ NH No-Hub
- ___ NH No-Hub
- ___ NL Neo-Loc
- ___ NL Neo-Loc
- ___ NL Neo-Loc

'E' BODY HT. DIM.

- 4-3/4 [121]
- 5 [127]
- 5-1/2 [140]
- 4-3/4 [121]
- 5-7/16 [138]
- 5-1/2 [140]

PREFIXES

- ___ ZB D.C.C.I. w/ Polished Bronze Top
- ___ ZN D.C.C.I. w/ Polished Nickel Bronze Top*
- ___ ZS D.C.C.I. w/ Polished Stainless Steel Top

SUFFIXES

- ___ -AR Acid Resisting Epoxy Coated Finish
- ___ -BP Bronze Plug (Not Available for 3 [76] Neo-Loc Outlet)
- ___ -G Galvanized Cast Iron
- ___ -TC Neo-Loc Test Cap Gasket (2-3-4 [51-76-102] NL Bottom Outlet Only)
- ___ -UP 1-3/4 [44] Pre-Pour Adjustment Extension Adapter
- ___ -VP Vandal-Proof Screws

* Regularly furnished unless otherwise specified.