

PRODUCT SHEET

# AMMA 6030

60 x 30 x 21

*Redefined massage. Ideal comfort.*



© BAINULTRA®

FEATURES	
Installation type	Alcove (3 walls)
No. of bathers	1
Raised seat	1
Heated backrest	1
Heated headrest	1
Inverted V	1
Control	MiaPlus
ThermoMasseur® bath	\$
Soaker bath	N/A

THERAPIES	
Chromatherapy 2-LED	\$
Sound Therapy (Euphonia™ System)	\$

COLORS	
<b>Standards</b>	
White	Bone Biscuit Almond
<b>Optionals</b> \$	
Black	Mexican sand Innocent blush Cashmere Sandbar Grey

WARRANTY	
Controls*	5 years
Bath & turbine*	20 years
*Some restrictions apply   <a href="http://www.bainultra.com/warranty">www.bainultra.com/warranty</a>	



**IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.**

AMMA®: AMMA 6030, AMMA 6032, AMMA 6036, AMMA 6636, AMMA OVAL 6638, AMMA 6060, AMMA 7048, AMMA 7236, AMMA 7242, AMMA OVAL 7242, AMMA OVAL 7242 FREESTANDING



The quest for your wellness™  
[www.bainultra.com](http://www.bainultra.com)


# AMMA 6030 60 x 30 x 21

## ACCESSORIES - OPTIONAL

<b>Skirts</b>	Littora \$	Elegance \$
<b>Drain &amp; overflow</b>	D-10 (17" - 22")	
	- Chrome	\$
	- White, Biscuit, Bone	\$\$
	- Brass	\$\$\$
	- Brushed nickel, Polished nickel, Oil-rubbed bronze	\$\$\$

<b>Integrated tile flange</b>	Included (specify right or left)	
<b>Control</b>	MiaMulti	\$

<b>TOTAL PRICE</b>	\$
--------------------	----

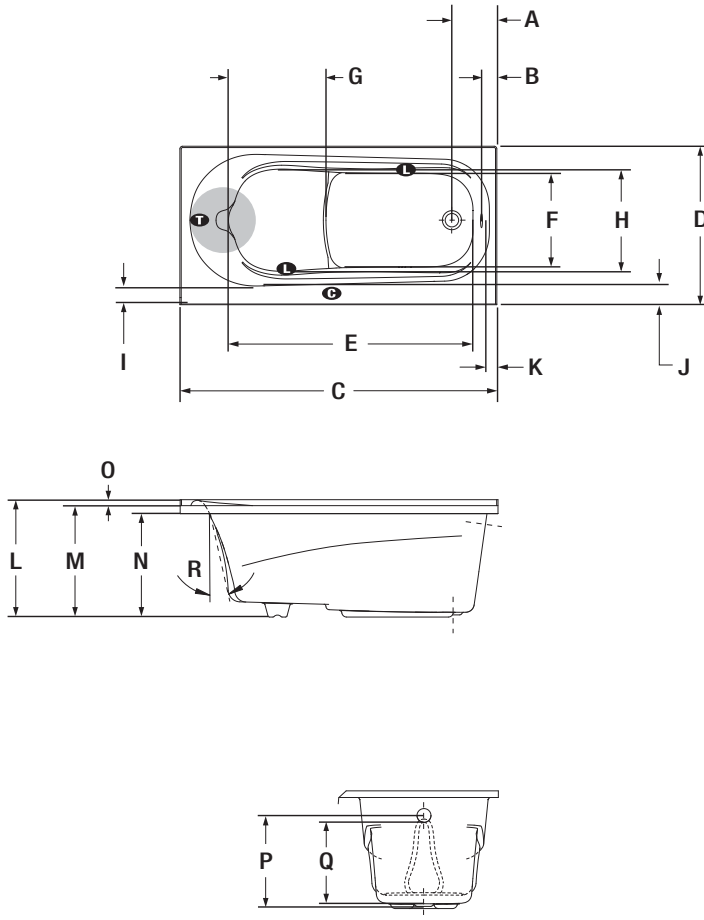

LETTER	DESCRIPTION	MEASURE
<b>A</b>	Outside edge to center drain	8 1/2"
<b>B</b>	Outside edge to overflow	2 1/2"
<b>C</b>	Total length	60"
<b>D</b>	Total width	30"
<b>E</b>	Bathing well length	46 1/4"
<b>F</b>	Bathing well width at foot area	17 1/2"
<b>G</b>	Raised seat length	18 1/2"
<b>H</b>	Raised seat width	19 3/8"
<b>I</b>	Frontside deck width (narrowest point)	3 1/8"
<b>J</b>	Frontside deck width (widest point)	4"
<b>K</b>	Deck width at drain end	2 1/8"
<b>L</b>	Total height to headrest	22"
<b>M</b>	Height from bottom of tub to top deck	21"
<b>N</b>	Height from bottom of tub to bottom of lip	19 1/2"
<b>O</b>	Tile flange height	1 1/2"
<b>P</b>	Height from drain to center of overflow	17"
<b>Q</b>	Maximum water level	15 1/4"
<b>R</b>	Slope of backrest	16°

- T** Indicates turbine position
- L** Indicates LED light position
- Indicates heated backrest
- C** Indicates control position when factory-installed

## AMMA 6030 TECHNICAL SPECIFICATIONS

<b>Jets</b>	45
<b>US gallons</b>	46
<b>Imp. gallons</b>	39
<b>Approx. shipping weight</b>	134 lbs
<b>Turbine power</b>	755 W
<b>Air heater</b>	700 W

<b>Hot water supply required</b>	Should be 70% of water capacity of tub or greater.
<b>Turbine access</b>	Must be at least 18" X 22" to access the pump. Must be connected to a 15 A, 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.
<b>Standards</b>	All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: ( <a href="http://www.bainultra.com/standards">www.bainultra.com/standards</a> ).
Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ( <a href="http://www.bainultra.com/documentation">www.bainultra.com/documentation</a> ).	

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.