

PRODUCT SHEET
AMMA 6032
 60" X 32" X 21"



THERMOMASSEUR® BATH	\$
THERMASENS™ BATH	\$
SOAKER BATH	N/A

THERMOMASSEUR (TMU)	
Jets	45
1 heated backrest	included
1 heated headrest	included
MiaPlus® Control	included
Geysair™	\$
AromaCloud™	\$
Chromatherapy - LED	\$

THERMASENS (TMSU)	
AromaCloud™	included
Chromatherapy - LED	included
WarmTouchShell™	included
2 DOT controls	included

FEATURES INCLUDED			
Installation type	Drop-in & Alcove (3 walls)		
No. of bathers		Raised seat	1
US gallons	46	Inverted V	1
Imp. gallons	39		

OPTIONAL UPCHARGE APPLICABLE			
COLORS			
Standards			
White	Bone	Biscuit	Almond
Optionals			\$
Black	Mexican sand	Cashmere	Sandbar
CONTROL (TMU ONLY)			
MiaMulti®	\$		
SKIRTS			
	MULTIFIT	ELEGANCE	SJ-1
Skirts	\$	\$	\$
Optional colors	\$	\$	\$
DRAIN & OVERFLOW			
	16" X 35"		
Chrome	\$		
White, Biscuit & Bone	\$		
Brass	\$		
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$		
TILE FLANGE			
Ordered with bath, uninstalled	\$		
Factory-installed	\$		

DON'T FORGET THAT ORDERING A TILE FLANGE FOR THIS BATH IS POSSIBLE.

1 800 463.2187
 info@bainultra.com

From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 From 8 a.m. to 5 p.m. on Friday (EST)

AMMA 6032 60" X 32" X 21"




ACCESSORIES (OPTIONAL)

OTHER

Optional tile flange (specify right or left).

TOTAL PRICE

\$

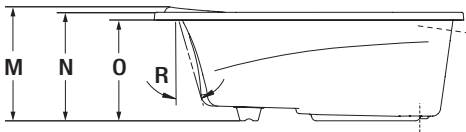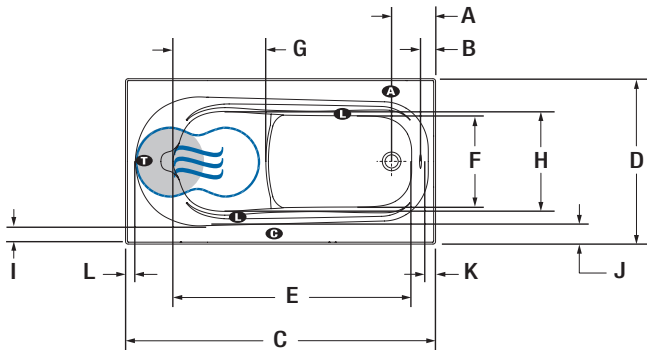

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	8 1/2"
B	Outside edge to overflow	2 1/2"
C	Total length	60"
D	Total width	32"
E	Bathing well length	46 1/4"
F	Bathing well width at foot area	17 1/2"
G	Raised seat length	18"
H	Raised seat width	19 3/8"
I	Deck width (narrowest point)	3 1/8"
J	Deck width (widest point)	3 7/8"
K	Deck width at drain end	2"
L	Deck width at backrest end	1 7/8"
M	Total height to headrest	22"
N	Height from bottom of tub to top deck	21"
O	Height from bottom of tub to bottom of lip	19 1/2"
P	Height from drain to center of overflow	17"
Q	Maximum water level	15 1/4"
R	Slope of backrest	16°

- T** Indicates turbine position (TMU)
- L** Indicates LED light position
- Indicates heated backrest (TMU)
- Ⓟ** Indicates control position when factory-installed
- ☰** Indicates WarmTouchShell position (TMSU)
- A** Indicates AromaCloud position

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 15 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A, 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentations).

Approx. shipping weight	138 lbs
Turbine power	755 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.