



PRODUCT SHEET  
**AMMA 6036**  
 60" X 36" X 21"



<b>THERMOMASSEUR® BATH</b>	\$
<b>THERMASENS™ BATH</b>	\$
<b>SOAKER BATH</b>	N/A

<b>THERMOMASSEUR (TMU)</b>	
Jets	45
1 heated backrest	included
1 heated headrest	included
MiaPlus® Control	included
Geysair™	\$
AromaCloud™	\$
Chromatherapy - LED	\$

<b>THERMASENS (TMSU)</b>	
AromaCloud™	included
Chromatherapy - LED	included
WarmTouchShell™	included
2 DOT controls	included

<b>FEATURES INCLUDED</b>			
Installation type	Drop-in & Alcove (3 walls)		
No. of bathers		Inverted V	1
US gallons	50	Armrests	2
Imp. gallons	41	Grab bars (color match)	2
Raised seat	1		

<b>OPTIONAL UPCHARGE APPLICABLE</b>			
<b>COLORS</b>			
<b>Standards</b>			
White	Bone	Biscuit	Almond
<b>Optionals</b>			\$
Black	Mexican sand	Cashmere	Sandbar
<b>CONTROL (TMU ONLY)</b>			
MiaMulti®	\$		
<b>SKIRTS</b>			
	<b>MULTIFIT</b>	<b>ELEGANCE</b>	<b>SJ-1</b>
Skirts	\$	\$	\$
Optional colors	\$	\$	\$
<b>CLEAR ACRYLIC GRAB BARS</b>			
With Chrome, Brass or Brushed nickel inserts	\$		
<b>DRAIN &amp; OVERFLOW</b>			
	<b>16" X 35"</b>		
Chrome	\$		
White, Biscuit & Bone	\$		
Brass	\$		
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$		
<b>TILE FLANGE</b>			
Ordered with bath, uninstalled	\$		
Factory-installed	\$		

DON'T FORGET THAT ORDERING A TILE FLANGE FOR THIS BATH IS POSSIBLE.

1 800 463.2187 From 8 a.m. to 8 p.m. Monday to Thursday (EST)  
 info@bainultra.com From 8 a.m. to 5 p.m. on Friday (EST)

# AMMA 6036 60" X 36" X 21"




## ACCESSORIES (OPTIONAL)

OTHER

Optional tile flange (specify right or left).

TOTAL PRICE

\$

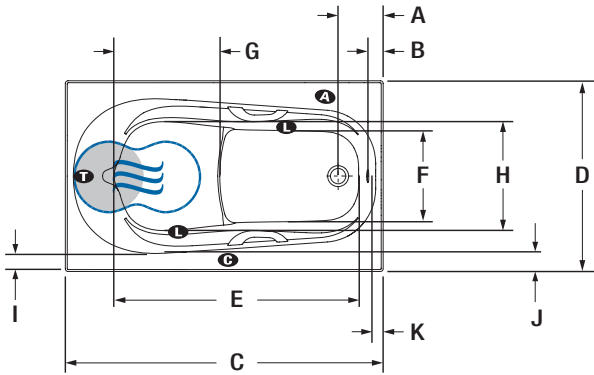

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	8 1/2"
B	Outside edge to overflow	2 1/2"
C	Total length	60"
D	Total width	36"
E	Bathing well length	46"
F	Bathing well width at foot area	17 1/8"
G	Raised seat length	20"
H	Raised seat width	20 5/8"
I	Deck width (narrowest point)	3 1/8"
J	Deck width (widest point)	4 1/8"
K	Deck width at drain end	2"
L	Total height to headrest	23 1/4"
M	Height from bottom of tub to top deck	21"
N	Height from bottom of tub to bottom of lip	19 1/2"
O	Height from drain to center of overflow	17"
P	Maximum water level	15 3/8"
Q	Slope of backrest	18°

- Indicates turbine position (TMU)
- Indicates heated backrest (TMU)
- Indicates WarmTouchShell position (TMSU)
- Indicates LED light position
- Indicates control position when factory-installed
- Indicates AromaCloud position

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

## TECHNICAL SPECIFICATIONS

<b>Hot water supply required</b>	Should be 70% of water capacity of tub or greater.
<b>Turbine</b>	Access to the pump must be at least 18" X 22". Standard connection is 15 A, 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A, 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A, 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentations](http://www.bainultra.com/documentations)).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

<b>Approx. shipping weight</b>	142 lbs
<b>Turbine power</b>	755 W
<b>Air heater</b>	700 W

## WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

