



PRODUCT SHEET
AYOURA 7236
 72" X 36" X 26"



THERMOMASSEUR® BATH	\$
THERMASENS™ BATH	N/A
SOAKER BATH	N/A

THERMOMASSEUR (TMU)	
Jets	59
1 heated backrest	included
1 heated headrest	included
MiaMulti® Control*	included
Geysair™	\$
AromaCloud™	N/A
Chromatherapy - LED	included

FEATURES INCLUDED			
Installation type			Drop-in
No. of bathers		Inverted V	1
US gallons	43	3-level footrest	1
Imp. gallons	36	Armrests	2
Raised seat	1	Grab bars (color match)	2

OPTIONAL UPCHARGE APPLICABLE

COLORS

Standards	
	White
	Bone
	Biscuit
	Almond

Optionals		\$
	Black	
	Mexican sand	
	Cashmere	
	Sandbar	
	Gray	

CLEAR ACRYLIC GRAB BARS

With Chrome, Brass or Brushed nickel inserts	\$
--	----

DRAIN & OVERFLOW **D12 (AYOURA®)**

Chrome	\$
White, Biscuit & Bone	\$
Brass	\$
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$

FOR THE CLEAR GRAB BARS, SPECIFY THE FINISH FOR THE INSERT FROM THE 3 CHOICES AVAILABLE.

1 800 463.2187 From 8 a.m. to 8 p.m. Monday to Thursday (EST)
 info@bainultra.com From 8 a.m. to 5 p.m. on Friday (EST)

AYOURA 7236 72" X 36" X 26"


ACCESSORIES (OPTIONAL)

CUTTING TEMPLATE

90000033

TOTAL PRICE

\$

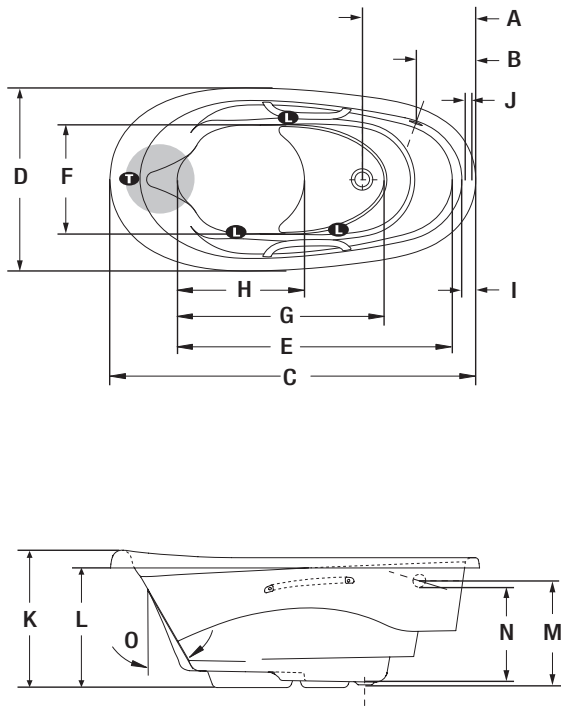

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	22 1/2"
B	Outside edge to overflow	11 3/4"
C	Total length	72 1/4"
D	Total width	36"
E	Bathing well length	53 5/8"
F	Bathing well width	21"
G	Bottom bathing well length	39 7/8"
H	Raised seat length	24 1/8"
I	Deck width at drain end	2 3/4"
J	Flat surface width	1 1/8"
K	Total height to headrest	26 1/8"
L	Height from bottom of tub to bottom of lip	22 5/8"
M	Height from drain to center of overflow	19 3/4"
N	Maximum water level	18"
O	Slope of backrest	30°

ⓘ Indicates turbine position (TMU)
● Indicates heated backrest (TMU)

Ⓛ Indicates LED light position

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine	Access to the pump must be at least 18" X 22". Standard connection is 15 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A. 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum

Approx. shipping weight	145 lbs
Turbine power	755 W
Air heater	700 W

WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

