



PRODUCT SHEET  
**AZUR 642**  
 72" X 42" X 20"



<b>THERMOMASSEUR® BATH</b>	\$
<b>THERMASENS™ BATH</b>	\$
<b>SOAKER BATH</b>	\$

<b>THERMOMASSEUR (TMU)</b>	
Jets	50
1 heated backrest	included
Mia® Control	included
Geysair™*	\$
AromaCloud™	\$
Chromatherapy - LED*	\$

<b>THERMASENS (TMSU)</b>	
AromaCloud™	included
Chromatherapy - LED	included
WarmTouchShell™	included
2 DOT controls (standard location)	included

<b>FEATURES INCLUDED</b>			
Installation type	Drop-in & Alcove (3 walls)		
No. of bathers		Armrests	2
US gallons	73	Grab bars (color match)	2
Imp. gallons	61		

**OPTIONAL UPCHARGE APPLICABLE**

<b>COLORS</b>	
<b>Standards</b>	
	White
	Bone
	Biscuit
	Almond
<b>Optionals</b>	
	Black
	Mexican sand
	Cashmere
	Sandbar
	Gray
	\$

<b>CONTROL (TMU ONLY)</b>	
MiaPlus® *(Included when purchasing this option)	\$
MiaMulti®	\$

<b>SKIRTS</b>	<b>MULTIFIT</b>	<b>ELEGANCE</b>	<b>SJ-1</b>
Skirts	\$	\$	\$
Optional colors	\$	\$	\$

<b>CLEAR ACRYLIC GRAB BARS</b>	
With Chrome, Brass or Brushed nickel inserts	\$

<b>DRAIN &amp; OVERFLOW</b>		<b>16" X 35"</b>
Chrome	\$	
White, Biscuit & Bone	\$	
Brass	\$	
Brushed nickel, Polished nickel & Oil-rubbed bronze	\$	

<b>TILE FLANGE</b>	
Ordered with bath, uninstalled	\$
Factory-installed	\$

SPECIFY COLOR FOR THE CONTROL, WHITE OR BISCUIT.

1 800 463.2187 From 8 a.m. to 8 p.m. Monday to Thursday (EST)  
 info@bainultra.com From 8 a.m. to 5 p.m. on Friday (EST)

# AZUR 642 72" X 42" X 20"




## ACCESSORIES (OPTIONAL)

OTHER

Optional tile flange (specify right or left).

TOTAL PRICE

\$

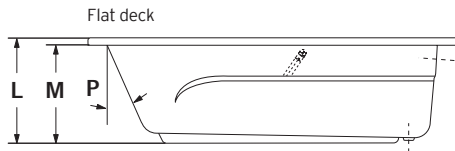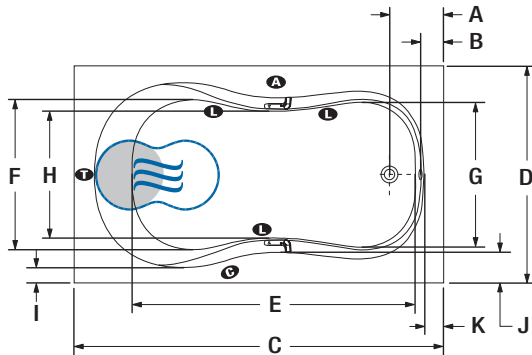

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	9 1/4"
B	Outside edge to overflow	3 5/8"
C	Total length	71 1/2"
D	Total width	41 7/8"
E	Bathing well length	56 1/2"
F	Bathing well width at seat area	28 7/8"
G	Bathing well width at foot area	27 3/4"
H	Bathing well width (narrowest point)	24 1/4"
I	Deck width (narrowest point)	3"
J	Deck width (widest point)	5 3/4"
K	Deck width at drain end	3 1/2"
L	Height from bottom of tub to top deck	20 1/4"
M	Height from bottom of tub to bottom of lip	18 3/4"
N	Height from drain to center of overflow	16 1/8"
O	Maximum water level	14 3/8"
P	Slope of backrest	23°

- Indicates turbine position (TMU)
- Indicates LED light position
- Indicates heated backrest (TMU)
- Indicates control position when factory-installed
- Indicates WarmTouchShell position (TMSU)
- Indicates AromaCloud position

When tiling flange is added, the AromaCloud will automatically be installed on the opposite side of the flange.

## TECHNICAL SPECIFICATIONS

<b>Hot water supply required</b>	Should be 70% of water capacity of tub or greater.
<b>Turbine</b>	Access to the pump must be at least 18" X 22". Standard connection is 15 A. 120 V, 60 hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). With Geysair, upgrade to 20 A. 120 V, 60 hz, dedicated line GFCI is needed. For any additional option with the Geysair, a second line is needed 15 A. 120 V, 60 hz, dedicated line with a GFCI. Air vent necessary: 2" X 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentations](http://www.bainultra.com/documentations)).

<b>Approx. shipping weight</b>	143 lbs
<b>Turbine power</b>	755 W
<b>Air heater</b>	700 W

## WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0,64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.