

PRODUCT SHEET  
**INUA 6636**

66 x 36 x 23

Reconnect with your inner life force.



© BAINULTRA®

FEATURES	
Installation type	Drop-in
No. of bathers	1
Raised seat	1
Heated backrest	1
Inverted V	1
Armrests	2
Grab bars (color match)	2
Control	MiaPlus
ThermoMasseur® bath	\$
Soaker bath	N/A

THERAPIES	
Chromatherapy 2-LED	\$
Sound Therapy (Euphonia® System)	\$

COLORS	
<b>Standards</b>	
White	Bone
Biscuit	Almond
<b>Optionals</b>	
Black	Mexican sand
Cashmere	Sandbar
	Grey

WARRANTY	
Controls*	5 years
Bath & turbine*	20 years
*Some restrictions apply   <a href="http://bainultra.com/warranty">bainultra.com/warranty</a>	



**IMPORTANT:** KEEP THE ORIGINAL. PLEASE MAKE COPIES.

# INUA 6636 66 x 36 x 23

## ACCESSORIES - OPTIONAL

Clear acrylic grab bars With Chrome, Brass or Brushed nickel inserts \$

TOTAL PRICE \$

## Therapeutic comfort cushion - INCLUDED

The removable cushions are equipped with magnets to hold them firmly in place. Their ultraresistant polyurethane construction makes them:

Extremely comfortable and soft to the touch


Fully waterproof

Remarkably durable

Color available: Warm Gray + Black


## WARNING

this product contains magnetic materials. It should not be used by individuals with a pacemaker, defibrillator, or any other electro-medical device.



For technical information on the cushion material, go to: [corium-ut.com](http://corium-ut.com)

## Bath installation

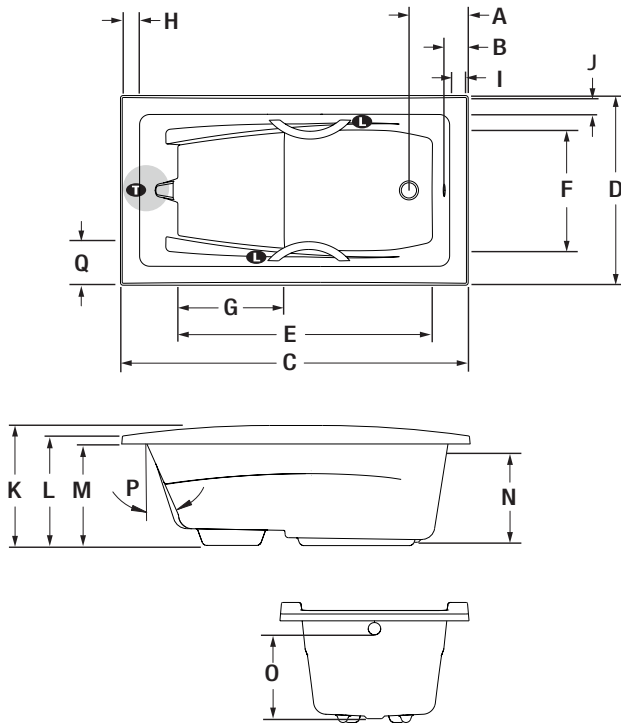

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	11 1/4"
B	Outside edge to overflow	4 1/2"
C	Total length	66"
D	Total width	36"
E	Bathing well length	48 1/8"
F	Bathing well width	22 7/8"
G	Raised seat length	20 1/8"
H	Deck width at backrest end	4 1/8"
I	Deck width at drain end	4 1/8"
J	Deck width	4"
K	Height from bottom of tub to top deck	23"
L	Height from bottom of tub to top deck	21"
M	Height from bottom of tub to bottom of lip	19 1/2"
N	Height from drain to center of overflow	17 1/8"
O	Maximum water level	15 3/8"
P	Slope of backrest	24"
Q	Minimum spout reach	8"

T Indicates turbine position  
● Indicates heated backrest

L Indicates LED light position

## INUA 6636 TECHNICAL SPECIFICATIONS

Jets	50	<b>Hot water supply required</b> Should be 70% of water capacity of tub or greater.
US gallons	62	
Imp. gallons	51	
<b>Approx. shipping weight</b>	138 lbs	<b>Turbine access</b> Must be at least 18" X 22" to access the pump. Must be connected to a 15 A, 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.
<b>Turbine power</b>	755 W	
<b>Air heater</b>	700 W	
<b>Standards</b>		All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: ( <a href="http://www.bainultra.com/standards">www.bainultra.com/standards</a> ).
Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ( <a href="http://www.bainultra.com/documentation">www.bainultra.com/documentation</a> ).		

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.