

## Commercial Dairy Barn Energy Saver Electric Water Heater



Photo is of  
DB-80R3DS



Copper Screw Type Immersion Element  
(Incoloy type immersion element available upon request)

### The Dairy Barn Model features:

- **Fully Automatic Controls**—Fast acting surface-mount thermostats for automatic temperature control up to 180°F (not recommended for sanitization purposes). Factory installed sensitive manual reset energy cutoff for safety to prevent overheating.
- **Direct Heat Transfer With Immersed Elements**—Transfers heat directly and efficiently to the water. Screw-in style.
- **Factory Installed Hydrojet® Total Performance System**—Cold water inlet sediment reducing device helps prevent sediment build up in tank. Increases first hour delivery of hot water while minimizing temperature build up at top of tank.
- **Vitraglas® Lining**—Bradford White tanks are lined with an exclusively engineered formula that provides superior protection from the highly corrosive effects of hot water. This formula (Vitraglas®) is fused to the steel surface by firing at a temperature of over 1600°F.
- **2" Non-CFC Foam Insulation**—Covers the sides and top of the tank, reducing the amount of heat loss. This results in less energy consumption, improved operation efficiencies and jacket rigidity.
- **Water Connections**—3/4" NPT factory installed true dielectric fittings.
- **Factory Installed Heat Traps**—Design incorporates a flexible disk that reduces heat loss in piping and eliminates the potential for noise generation.
- **Protective Magnesium Anode Rod**—Provides added protection against corrosion for long trouble-free service.
- **4" Leg Kit**—Provides access for cleaning under the water heater.
- **Simultaneous and Non-Simultaneous Operation Available**—Simultaneous operation indicates when both elements are being heated at the same time. Non-Simultaneous operation indicates when one element is being heated at a time.
- **Voltages Available**—120V, 208V, 240V, 277V, 480V.
- **Single Phase or Three Phase Operation Available**—120V and 277V may only be wired for single phase operation.
- **T&P Relief Valve**—Installed.
- **Low Restriction Brass Drain Valve**—Durable tamper proof design.



### 3 or 5-Year Limited Tank Warranties / 1-Year Limited Warranty on Component Parts.

For more information on warranty, please visit [www.bradfordwhite.com](http://www.bradfordwhite.com)

For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

# Commercial Electric Water Heater

## Dairy Barn Energy Saver Model

C.E.C. Listed



Model Number	Capacity		Recovery 100°F Rise		A Floor to Heater Top	B Jacket Dia.	C Floor to Water Conn.	D Floor to T&P Conn.	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	U.S. GPH*	Imp. GPH*	in.	in.	in.	in.	lbs.
DB-80R3DS	80	67	18	15	63	24	64 <sup>5/8</sup>	63	190
Model Number	Capacity		Recovery 56°C Rise		A Floor to Heater Top	B Jacket Dia.	C Floor to Water Conn.	D Floor to T&P Conn.	Approx. Shipping Weight
	Liters		Liters/Hour*		mm.	mm.	mm.	mm.	kg.
DB-80R3DS	303		68		1600	610	1641	1600	86

For 5 year models, change suffix "3" to "5".

Use chart on right for maximum wattages at certain voltages.

For single element models, change suffix "D" to "S"

\*Based on 4500W/4500W, Non-Simultaneous operation.

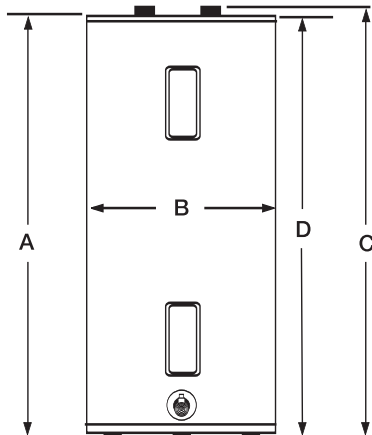

Wattage	Recovery ▲ GPH Temperature Rise °F				
	60	80	90	100	120
1500W	10	8	7	6	5
2000W	14	10	9	8	7
2500W	17	13	11	10	9
3000W	21	15	14	12	10
3500W	24	18	16	14	12
4000W	28	21	18	16	14
4500W	31	23	21	18	15
5000W	34	26	23	21	17
5500W	38	29	25	23	19
6000W	41	31	28	25	21

▲(GPH based on Non-Simultaneous operation, when Simultaneous operation the GPH will approximately double.)

Wattage Limitations for Simultaneous Operation	Voltage				
	120V	208V	240V	277V	480V
1500W / 1500W	yes	yes	yes	yes	yes
2000W / 2000W	no	yes	yes	yes	yes
2500W / 2500W	no	yes	yes	yes	yes
3000W / 3000W	no	yes	yes	yes	yes
3500W / 3500W	no	yes	yes	no	no
4000W / 4000W	no	yes	yes	yes	yes
4500W / 4500W	no	yes	yes	yes	yes
5000W / 5000W	no	yes	yes	yes	yes
5500W / 5500W	no	no	yes	no	no
6000W / 6000W	no	no	no	yes	yes

Wattage Limitations for Non-Simultaneous Operation	Voltage				
	120V	208V	240V	277V	480V
1500W / 1500W	yes	yes	yes	yes	yes
2000W / 2000W	yes	yes	yes	yes	yes
2500W / 2500W	yes	yes	yes	yes	yes
3000W / 3000W	yes	yes	yes	yes	yes
3500W / 3500W	no	yes	yes	no	no
4000W / 4000W	no	yes	yes	yes	yes
4500W / 4500W	no	yes	yes	yes	yes
5000W / 5000W	no	yes	yes	yes	yes
5500W / 5500W	no	yes	yes	no	no
6000W / 6000W	no	yes	yes	yes	yes

### General

All models are UL listed. These heaters are wired inter-locking

(Non-Simultaneous, Single Phase) 240V with two 4500W elements, unless otherwise specified.

All water and electrical connections are 3/4" (19mm),

All models certified at 300 psi test pressure (2068 kPa) and 150 psi working pressure (1034 kPa.)

**Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.**



Ambler, PA

For U.S. and Canada field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 • Fax 215-641-1670 / Technical Support 800-334-3393 • Fax 269-795-1089 • Warranty 800-531-2111 • Fax 269-795-1089

International: Telephone 215-641-9400 • Telefax 215-641-9750 / [www.bradfordwhite.com](http://www.bradfordwhite.com)



BRADFORD WHITE-CANADA INC. Sales / Technical Support 866-690-0961 / 905-238-0100 • Fax 905-238-0105 / [www.bradfordwhite.com](http://www.bradfordwhite.com)

## Built to be the Best™

©2010, Bradford White Corporation. All rights reserved.