

COOLING CAPACITY : 17,000 - 57,000 BTU/H

ENERGY-EFFICIENT SPLIT SYSTEM AIR CONDITIONER UP TO 14 SEER & 11.5 EER



Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data.....	4
AHRI Ratings.....	20
Wiring Diagram.....	35
Dimensions.....	36
Accessories.....	36

Standard Features

- Energy-efficient scroll compressor
- High-density foam compressor sound blanket
- Advanced Copeland® CoreSense™ technology
- Factory-installed filter drier
- Copper tube / enhanced aluminum fin coil
- Sweat connection service valves with easy access to gauge ports
- Contactor with lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge, galvanized-steel cabinet with grille-style sound control top
- Custom Nickel Gray powder-paint finish
- 500-hour salt-spray tested
- Wire fan discharge grille
- Steel louver coil guard
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2010 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)



* Complete warranty details available from your local dealer or at www.daikincomfort.com. To receive the 6-Year Unit Replacement Limited Warranty and 12-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Additional requirements for annual maintenance are required for the Unit Replacement Limited Warranty. Online registration and some of the additional requirements are not required in California or Quebec.

	D	X	13	S	A	036	3	AA	
	1	2	3,4	5	6	7,8,9	10	11,12	
Brand	D - Daikin								Engineering Major & Minor revisions * Not used for inventory control.
Type	X - AC R-410A Z - HP R-410A								Voltage 1 - 208/230 V Single-Phase 60 Hz
SEER	13 - 13 SEER	18 - 18 SEER							Nominal Tonnage
	14 - 14 SEER	20 - 20 SEER							018 - 1½ tons 042 - 3½ tons
	16 - 16 SEER								024 - 2 tons 048 - 4 tons
									030 - 2½ tons 060 - 5 tons
									036 - 3 tons 061 - 5 tons (high capacity)
Compressor	S - Single Stage T - Two Stage								Feature Set
						A - Base C - ComfortNet 4-Wire Ready			D - Deluxe N - Nominal

	DX13SA 0181A*	DX13SA 0241A*	DX13SA 0301A*	DX13SA 0361A*	DX13SA 0421A*	DX13SA 0481A*	DX13SA 0601A*	DX13SA 0611A*
CAPACITIES								
Nominal Cooling (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000	60,000
Decibels	71	71	72	74	74	74	77	72
COMPRESSOR								
RLA	9.0	13.5	12.8	14.1	17.9	19.9	25.0	26.4
LRA	48	58.3	64	77	112	109	134	134
CONDENSER FAN MOTOR								
Horsepower	1/8	1/8	1/8	1/4	1/4	1/4	1/4	1/4
FLA	0.7	0.7	0.7	1.5	1.5	1.5	1.5	1.5
REFRIGERATION SYSTEM								
Refrigerant Line Size								
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	7/8"	1 1/8"	1 1/8"	1 1/8"	7/8"
Refrigerant Connection Size								
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{4 5}	3/4"	3/4"	3/4"	3/4" ⁴	7/8" ⁵	7/8" ⁵	7/8" ⁵	3/4"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	69	63	62	52	83	97	100	111
Shipped with Orifice Size	0.051	0.057	0.061	0.070	0.076	0.080	0.086	0.086
ELECTRICAL DATA								
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ²	12	17.6	16.7	19.1	23.9	26.4	32.8	34.5
Max. Overcurrent Protection ³	20	30	25	30	40	45	50	60
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Equipment Weight (lbs)	102	115	115	118	171	175	184	211
Ship Weight (lbs)	117	128	132	135	189	193	202	233

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & Operating instructions and/or the long line-set guidelines.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

⁴ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁵ Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

IDB		OUTDOOR AMBIENT TEMPERATURE											ENTERING INDOOR WET BULB TEMPERATURE										
		65°F			75°F			85°F			95°F			105°F			115°F						
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
525	MBh	16.2	16.5	17.7	18.9	15.8	16.1	17.3	18.4	15.4	15.8	16.8	18.0	15.0	15.4	16.4	17.6	14.3	14.6	15.6	16.7		
	S/T	0.85	0.80	0.65	0.5	0.88	0.82	0.67	0.50	0.90	0.85	0.69	0.5	0.93	0.87	0.71	0.53	0.97	0.91	0.74	0.6		
	Δ T	24	23	20	16	24	23	20	16	24	23	20	16	25	24	20	16	24	23	22	19		
	kW	1.27	1.30	1.33	1.4	1.36	1.39	1.43	1.47	1.44	1.47	1.51	1.6	1.50	1.53	1.58	1.63	1.56	1.59	1.64	1.7		
	Amps	4.7	4.8	5.0	5.2	5.1	5.2	5.4	5.6	5.5	5.7	5.8	6.0	5.9	6.0	6.2	6.5	6.3	6.4	6.6	6.9		
600	Hi PR	218	234	247	258.0	244	263	278	290	278	299	316	329.3	316	341	360	375	356	383	405	421.9		
	Lo PR	106	113	124	131.6	112	120	131	139	117	124	136	144.5	123	131	142	152	129	137	149	159.0		
	MBh	17.5	17.9	19.1	20.5	17.1	17.5	18.7	20.0	16.7	17.1	18.2	19.5	16.3	16.7	17.8	19.0	15.5	15.8	16.9	18.1		
	S/T	0.88	0.83	0.67	0.5	0.91	0.86	0.70	0.52	0.94	0.88	0.71	0.5	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.6		
	Δ T	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	22	19		
675	kW	1.30	1.33	1.36	1.4	1.39	1.42	1.46	1.50	1.47	1.50	1.54	1.6	1.54	1.57	1.62	1.67	1.60	1.63	1.68	1.7		
	Amps	4.9	5.0	5.1	5.3	5.2	5.4	5.5	5.7	5.7	5.8	6.0	6.2	6.1	6.2	6.4	6.6	6.4	6.6	6.8	7.1		
	Hi PR	224	242	255	266.0	252	271	286	298	286	308	325	339.5	326	351	371	387	367	395	417	435.0		
	Lo PR	110	117	127	135.6	116	123	135	143	120	128	140	148.9	126	135	147	156	133	141	154	164.0		
	MBh	18.1	18.4	19.7	21.1	17.6	18.0	19.3	20.6	17.2	17.6	18.8	20.1	16.8	17.2	18.3	19.6	16.0	16.3	17.4	18.6		

IDB		OUTDOOR AMBIENT TEMPERATURE											ENTERING INDOOR WET BULB TEMPERATURE										
		65°F			75°F			85°F			95°F			105°F			115°F						
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
525	MBh	16.5	16.8	17.6	18.7	16.1	16.4	17.2	18.3	15.7	16.0	16.8	17.9	15.3	15.6	16.3	17.4	14.5	14.8	15.5	16.6		
	S/T	0.89	0.86	0.77	0.63	0.92	0.89	0.80	0.65	0.95	0.91	0.82	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.72		
	Δ T	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	25	25	24	21		
	kW	1.28	1.31	1.34	1.38	1.37	1.40	1.44	1.48	1.45	1.48	1.52	1.57	1.52	1.55	1.59	1.64	1.57	1.61	1.66	1.71		
	Amps	4.8	4.9	5.0	5.2	5.1	5.3	5.4	5.6	5.6	5.7	5.9	6.1	5.9	6.1	6.3	6.5	6.3	6.5	6.7	6.9		
600	Hi PR	220	237	250	261	247	266	280	292	281	302	319	333	320	344	363	379	360	387	409	426		
	Lo PR	107	114	125	133	114	121	132	140	118	126	137	146	124	132	144	153	130	138	151	161		
	MBh	17.8	18.2	19.0	20.3	17.4	17.8	18.6	19.8	17.0	17.3	18.2	19.4	16.6	16.9	17.7	18.9	15.8	16.1	16.8	18.0		
	S/T	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74		
	Δ T	25	25	23	20	26	25	24	21	26	25	24	21	25	25	24	21	24	25	24	20		
675	kW	1.31	1.33	1.37	1.41	1.40	1.43	1.47	1.51	1.48	1.51	1.56	1.60	1.55	1.58	1.63	1.68	1.61	1.64	1.69	1.75		
	Amps	4.9	5.0	5.2	5.4	5.3	5.4	5.6	5.8	5.7	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.6	6.9	7.1		
	Hi PR	227	244	258	269	254	274	289	301	289	311	329	342.9	329	355	374	391	371	399	421	439.3		
	Lo PR	111	118	129	137	117	124	136	145	122	129	141	150	128	136	148	158	134	142	155	165.6		
	MBh	18.4	18.7	19.6	20.9	17.9	18.3	19.2	20.4	17.5	17.9	18.7	19.9	17.1	17.4	18.2	19.5	16.2	16.5	17.3	18.5		

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

Amps = outdoor unit amps (comp.+fan)
kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																							
		75°F				85°F				95°F				105°F				115°F							
IDB	AIRFLOW	ENTERING INDOOR WET BULB TEMPERATURE																							
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71				
1050	MBh	29.5	30.6	33.5	-	28.8	29.9	32.7	-	28.1	29.2	31.9	-	27.4	28.4	31.2	-	26.1	27.0	29.6	-	24.2	25.0	27.4	-
	S/T	0.68	0.56	0.39	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.78	0.65	0.45	-
	Δ T	17	15	11	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	16	14	11	-
	kW	2.36	2.40	2.47	-	2.52	2.57	2.65	-	2.67	2.72	2.80	-	2.79	2.85	2.94	-	2.90	2.96	3.05	-	3.00	3.06	3.15	-
	Amps	8.6	8.8	9.1	-	9.3	9.6	9.9	-	10.1	10.4	10.7	-	10.8	11.1	11.4	-	11.5	11.8	12.2	-	12.2	12.5	12.9	-
Hi PR	232	249	263	-	260	280	295	-	295	318	336	-	337	362	382	-	379	407	430	-	418	450	475	-	
Lo PR	99	105	115	-	104	111	121	-	108	115	126	-	114	121	132	-	119	127	139	-	124	131	143	-	
70	MBh	32.0	33.1	36.3	-	31.2	32.4	35.5	-	30.5	31.6	34.6	-	29.7	30.8	33.8	-	28.2	29.3	32.1	-	26.2	27.1	29.7	-
	S/T	0.70	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.62	0.43	-	0.77	0.64	0.45	-	0.80	0.67	0.46	-	0.81	0.67	0.47	-
	Δ T	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
	kW	2.41	2.46	2.53	-	2.58	2.63	2.71	-	2.73	2.78	2.87	-	2.86	2.92	3.01	-	2.97	3.03	3.13	-	3.07	3.13	3.23	-
	Amps	8.9	9.1	9.4	-	9.6	9.8	10.1	-	10.4	10.7	11.0	-	11.1	11.4	11.8	-	11.8	12.1	12.5	-	12.5	12.8	13.2	-
Hi PR	239	257	271	-	268	288	304	-	305	328	346	-	347	373	394	-	390	420	444	-	431	464	490	-	
Lo PR	102	108	118	-	108	114	125	-	112	119	130	-	117	125	136	-	123	131	143	-	127	135	148	-	
MBh	32.9	34.1	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.7	-	30.6	31.7	34.8	-	29.1	30.2	33.0	-	27.0	27.9	30.6	-	
S/T	0.74	0.61	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.84	0.70	0.48	-	0.84	0.70	0.49	-	
Δ T	16	14	11	-	17	14	11	-	17	14	11	-	17	15	11	-	17	14	11	-	15	13	10	-	
kW	2.43	2.48	2.55	-	2.60	2.65	2.73	-	2.75	2.80	2.89	-	2.88	2.94	3.03	-	2.99	3.06	3.15	-	3.09	3.16	3.25	-	
Amps	9.0	9.2	9.5	-	9.7	9.9	10.2	-	10.5	10.8	11.1	-	11.2	11.5	11.9	-	11.9	12.2	12.6	-	12.6	12.9	13.4	-	
Hi PR	241	259	274	-	271	291	307	-	308	331	350	-	350	377	398	-	394	424	448	-	436	469	495	-	
Lo PR	103	109	119	-	109	116	126	-	113	120	131	-	119	126	138	-	124	132	144	-	129	137	149	-	
1350	MBh	30.0	30.9	33.4	35.9	29.3	30.2	32.7	35.1	28.6	29.5	31.9	34.2	27.9	28.7	31.1	33.4	26.5	27.3	29.6	31.7	24.6	25.3	27.4	29.4
	S/T	0.77	0.69	0.52	0.33	0.80	0.71	0.54	0.35	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.37	0.88	0.78	0.59	0.38	0.88	0.79	0.60	0.38
	Δ T	20	19	15	11	20	19	15	11	20	19	15	11	21	19	16	11	20	19	15	11	19	17	14	10
	kW	2.38	2.42	2.49	2.56	2.54	2.59	2.67	2.75	2.69	2.74	2.82	2.91	2.82	2.87	2.96	3.05	2.93	2.99	3.08	3.17	3.02	3.08	3.18	3.28
	Amps	8.7	8.9	9.2	9.6	9.4	9.6	10.0	10.3	10.2	10.5	10.8	11.2	10.9	11.2	11.5	12.0	11.6	11.9	12.3	12.7	12.3	12.6	13.0	13.5
Hi PR	234	252	266	277	262	282	298	311	298	321	339	354	340	366	386	403	382	412	435	453	423	455	480	501	
Lo PR	100	106	116	123	105	112	122	130	110	117	127	136	115	122	134	142	121	128	140	149	125	133	145	154	
75	MBh	32.5	33.5	36.2	38.9	31.8	32.7	35.4	38.0	31.0	31.9	34.5	37.1	30.2	31.1	33.7	36.2	28.7	29.6	32.0	34.4	26.6	27.4	29.7	31.8
	S/T	0.80	0.71	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.91	0.81	0.61	0.40	0.92	0.82	0.62	0.40
	Δ T	20	18	15	10	20	19	15	10	20	19	15	10	20	19	15	11	20	18	15	10	19	17	14	10
	kW	2.43	2.48	2.55	2.62	2.60	2.65	2.73	2.81	2.75	2.80	2.89	2.98	2.88	2.94	3.03	3.13	2.99	3.06	3.15	3.25	3.09	3.16	3.25	3.36
	Amps	9.0	9.2	9.5	9.8	9.7	9.9	10.2	10.6	10.5	10.8	11.1	11.5	11.2	11.5	11.9	12.3	11.9	12.2	12.6	13.1	12.6	12.9	13.4	13.9
Hi PR	241	259	274	286	271	291	307	321	308	331	350	365	350	377	398	415	394	424	448	467	436	469	495	516	
Lo PR	103	109	119	127	109	116	126	134	113	120	131	140	119	126	138	147	124	132	144	154	129	137	149	159	
MBh	33.5	34.5	37.3	40.0	32.7	33.7	36.4	39.1	31.9	32.9	35.6	38.2	31.1	32.1	34.7	37.3	29.6	30.5	33.0	35.4	27.4	28.2	30.5	32.8	
S/T	0.84	0.75	0.57	0.36	0.87	0.77	0.59	0.38	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42	
Δ T	19	18	14	10	19	18	15	10	19	18	15	10	19	18	15	10	19	18	14	10	18	16	14	9	
kW	2.45	2.49	2.57	2.64	2.62	2.67	2.75	2.83	2.77	2.83	2.91	3.00	2.90	2.96	3.05	3.15	3.02	3.08	3.18	3.28	3.12	3.18	3.28	3.38	
Amps	9.0	9.3	9.6	9.9	9.8	10.0	10.3	10.7	10.6	10.9	11.2	11.6	11.3	11.6	12.0	12.4	12.0	12.3	12.7	13.2	12.7	13.1	13.5	14.0	
Hi PR	244	262	277	289	273	294	311	324	311	334	353	368	354	381	402	420	398	429	453	472	440	474	500	522	
Lo PR	104	111	121	129	110	117	127	136	114	121	133	141	120	127	139	148	126	134	146	155	130	138	151	161	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 Amps = outdoor unit amps (comp.+fan)
 kW = Total system power

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
80	1400	MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9
		S/T	0.88	0.83	0.67	0.5	0.91	0.86	0.70	0.52	0.94	0.88	0.71	0.5	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.6	1.01	0.95	0.77	0.58
	1600	Δ T	24	23	20	16	24	23	20	16	25	23	20	16	25	24	21	16	24	23	20	16	23	22	19	15
		kW	3.26	3.33	3.42	3.5	3.49	3.56	3.67	3.78	3.79	3.77	3.89	4.0	3.88	3.96	4.08	4.21	4.03	4.12	4.25	4.4	4.17	4.25	4.39	4.53
	1800	Amps	12.1	12.3	12.7	13.2	13.0	13.3	13.8	14.3	14.2	14.5	15.0	15.5	15.1	15.5	16.0	16.6	16.1	16.5	17.0	17.7	17.1	17.5	18.1	18.8
		Hi PR	247	265	280	292.3	277	298	315	328	315	339	358	373.1	359	386	407	425	403	434	458	478.0	446	480	506	528
	Lo PR	106	113	123	130.9	112	119	130	138	116	124	135	143.7	122	130	142	151	128	136	149	158.2	132	141	154	164	

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
85	1400	MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7
		S/T	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75
	1600	Δ T	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	25	25	24	21	23	23	23	20
		kW	3.29	3.35	3.45	3.55	3.52	3.59	3.70	3.81	3.73	3.80	3.92	4.04	3.91	3.99	4.11	4.24	4.07	4.15	4.28	4.42	4.20	4.29	4.42	4.56
	1800	Amps	12.2	12.5	12.9	13.3	13.1	13.5	13.9	14.4	14.3	14.6	15.1	15.7	15.3	15.6	16.2	16.8	16.2	16.6	17.2	17.9	17.2	17.6	18.2	18.9
		Hi PR	249	268	283	295	280	301	318	331	318	342	361	377	362	390	411	429	407	438	463	483	450	484	511	533
	Lo PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165	

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 Amps = outdoor unit amps (comp.+fan)
 kW = Total system power

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65°F				75°F				85°F				95°F				105°F				115°F				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1750	MBh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-
		S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-
		Δ T	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-
		kW	4.03	4.11	4.24	-	4.33	4.42	4.56	-	4.60	4.70	4.85	-	4.83	4.94	5.10	-	5.03	5.14	5.31	-	5.21	5.32	5.49	-
		Amps	15.2	15.6	16.1	-	16.5	16.9	17.5	-	18.0	18.4	19.0	-	19.2	19.7	20.4	-	20.5	21.0	21.7	-	21.7	22.3	23.0	-
	Hi PR	259	279	294	-	291	313	330	-	331	356	376	-	376	405	428	-	423	456	481	-	468	504	532	-	
	Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-	
	MBh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-	
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-	
	Δ T	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-	
kW	4.03	4.11	4.24	-	4.33	4.42	4.56	-	4.60	4.70	4.85	-	4.83	4.94	5.10	-	5.03	5.14	5.31	-	5.21	5.32	5.49	-		
Amps	15.2	15.6	16.1	-	16.5	16.9	17.5	-	18.0	18.4	19.0	-	19.2	19.7	20.4	-	20.5	21.0	21.7	-	21.7	22.3	23.0	-		
Hi PR	259	279	294	-	291	313	330	-	331	356	376	-	376	405	428	-	423	456	481	-	468	504	532	-		
Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-		
75	1750	MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0
		S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39
		Δ T	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11
		kW	4.06	4.15	4.27	4.41	4.37	4.46	4.60	4.75	4.64	4.74	4.89	5.04	4.87	4.98	5.14	5.31	5.07	5.19	5.35	5.53	5.25	5.36	5.54	5.72
		Amps	15.4	15.8	16.3	16.9	16.7	17.1	17.6	18.3	18.1	18.6	19.2	20.0	19.4	19.9	20.6	21.4	20.7	21.2	21.9	22.8	21.9	22.5	23.3	24.2
	Hi PR	262	282	297	310	294	316	334	348	334	359	379	396	380	409	432	451	428	460	486	507	473	509	537	560	
	Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165	
	MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0	
	S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39	
	Δ T	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11	
kW	4.06	4.15	4.27	4.41	4.37	4.46	4.60	4.75	4.64	4.74	4.89	5.04	4.87	4.98	5.14	5.31	5.07	5.19	5.35	5.53	5.25	5.36	5.54	5.72		
Amps	15.4	15.8	16.3	16.9	16.7	17.1	17.6	18.3	18.1	18.6	19.2	20.0	19.4	19.9	20.6	21.4	20.7	21.2	21.9	22.8	21.9	22.5	23.3	24.2		
Hi PR	262	282	297	310	294	316	334	348	334	359	379	396	380	409	432	451	428	460	486	507	473	509	537	560		
Lo PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165		
MBh	57.1	58.8	63.6	68.3	55.8	57.4	62.1	66.7	54.4	56.0	60.7	65.1	53.1	54.7	59.2	63.5	50.4	51.9	56.2	60.3	46.7	48.1	52.1	55.9		
S/T	0.84	0.75	0.57	0.36	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42		
Δ T	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10		
kW	4.13	4.21	4.34	4.48	4.44	4.53	4.67	4.82	4.71	4.81	4.97	5.13	4.95	5.06	5.22	5.40	5.16	5.27	5.44	5.62	5.34	5.45	5.63	5.82		
Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	18.9	19.6	20.3	19.8	20.3	21.0	21.8	21.1	21.6	22.3	23.2	22.4	22.9	23.7	24.6		
Hi PR	267	287	303	316	299	322	340	355	341	366	387	404	388	417	441	460	436	470	496	517	482	519	548	571		
Lo PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168		

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 Amps = outdoor unit amps (comp.+fan)
 kW = Total system power

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0181A*	ACNF18XX16D*		16,800	12,200	13.0	10.8	600	6524086
	ACNF24XX16D*		17,000	12,400	13.0	10.8	600	6524088
	ARUF18B14A*		17,200	12,500	13.0	11.0	600	6524094
	ARUF18B14A*+TXV		17,200	12,500	13.0	11.0	600	6524096
	ARUF24B14C*+TXV		17,200	12,500	13.5	11.0	600	7084860
	ARUF25B14A*		18,000	13,100	13.0	11.0	570	7988964
	ASPT25B14A*		17,600	12,800	14.0	12.0	580	8245704
	ASPT29B14A*		18,000	13,100	14.0	12.0	560	8245705
	ASPT30C14A*		18,000	13,100	14.0	12.0	580	6524110
	AVPTC24B14A*		17,600	12,800	14.0	12.0	600	6524119
	AVPTC30C14A*		18,000	13,100	14.0	12.0	615	6524123
	AWUF18XX16B*		17,400	12,700	13.0	11.0	650	6524126
	AWUF31XX16A*		17,400	12,700	14.0	11.5	600	6524128
	CA*F1824*6D*	D*96VE0302BNA*	17,800	13,000	14.0	11.5	600	7367021
	CA*F1824*6D*	D*97MC0603BNA*	17,800	13,000	14.0	11.5	600	7359778
	CA*F1824*6D*	D*80HE0603B*A*	17,800	13,000	14.0	11.5	640	6524177
	CA*F1824*6D*	D*96VE0803BNA*	17,800	13,000	14.0	11.5	575	7367036
	CA*F1824*6D*	D*96VE0402BNA*	17,800	13,000	14.0	11.5	600	7367026
	CA*F1824*6D*	D*96VC0403BNA*	17,800	13,000	14.0	11.5	625	7359775
	CA*F1824*6D*	D*96VE0603BNA*	17,400	12,700	14.0	11.5	550	7367031
	CA*F1824*6D*	D*97MC0803BNA*	17,800	13,000	14.0	11.5	630	7359779
	CA*F1824*6D*	D*96VC0803BNA*	17,800	13,000	14.0	11.5	630	7359777
	CA*F1824*6D*	D*80VC0604B*A*	17,700	12,900	14.0	11.6	620	6524181
	CA*F1824*6D*	D*96VC0603BNA*	17,800	13,000	14.0	11.5	600	7359776
	CA*F1824*6D*+EEP		17,800	13,000	13.0	11.0	600	6524130
	CA*F1824*6D*+MBVC1200**-1A*		18,200	13,300	14.0	11.5	640	6524132
	CA*F1824*6D*+TXV	D*96VE0302BNA*	17,800	13,000	14.0	11.5	600	7367022
	CA*F1824*6D*+TXV	D*96VC0403BNA*	17,800	13,000	14.0	11.5	625	7359780
	CA*F1824*6D*+TXV	D*96VE0402BNA*	17,800	13,000	14.0	11.5	600	7367027
	CA*F1824*6D*+TXV	D*97MC0603BNA*	17,800	13,000	14.0	11.5	600	7359783
	CA*F1824*6D*+TXV	D*96VC0603BNA*	17,800	13,000	14.0	11.5	600	7359781
	CA*F1824*6D*+TXV	D*96VE0603BNA*	17,400	12,700	14.0	11.5	550	7367032
	CA*F1824*6D*+TXV	D*97MC0803BNA*	17,800	13,000	14.0	11.5	630	7359784
	CA*F1824*6D*+TXV	D*96VC0803BNA*	17,800	13,000	14.0	11.5	630	7359782
	CA*F1824*6D*+TXV	D*96VE0803BNA*	17,800	13,000	14.0	11.5	575	7367037
	CA*F3030*6D*+EEP		18,000	13,100	13.0	11.0	650	6524134
	CA*F3030*6D*+EEP+TXV		18,000	13,100	13.0	11.0	650	6524136
	CA*F3131*6D*+EEP		18,000	13,100	13.0	11.0	650	6524138
	CA*F3131*6D*+EEP+TXV		18,000	13,100	13.0	11.0	650	6524140
	CA*F3636*6D*	D*97MC0603BNA*	18,400	13,400	14.0	11.5	600	7359788
	CA*F3636*6D*	D*96VC0803BNA*	18,400	13,400	14.0	11.5	630	7359787
	CA*F3636*6D*	D*96VC0403BNA*	18,400	13,400	14.0	11.5	625	7359785
	CA*F3636*6D*	D*97MC0803BNA*	18,400	13,400	14.0	11.5	630	7359789
	CA*F3636*6D*	D*96VC0603BNA*	18,400	13,400	14.0	11.5	600	7359786
	CA*F3636*6D*+TXV	D*96VC0803BNA*	18,400	13,400	14.0	11.5	630	7359792
	CA*F3636*6D*+TXV	D*97MC0803BNA*	18,400	13,400	14.0	11.5	630	7359794
	CA*F3636*6D*+TXV	D*97MC0603BNA*	18,400	13,400	14.0	11.5	600	7359793
	CA*F3636*6D*+TXV	D*96VC0403BNA*	18,400	13,400	14.0	11.5	625	7359790
	CA*F3636*6D*+TXV	D*96VC0603BNA*	18,400	13,400	14.0	11.5	600	7359791
	CAPT3131*4A*	D*80VC0604B*A*	18,000	13,100	14.0	11.5	620	6524182
CAPT3131*4A*	D*80HE0603B*A*	18,000	13,100	14.0	11.5	600	6524178	
CAPT3131*4A*	D*96VE0302BNA*	17,800	13,000	14.0	11.5	600	7367023	
CAPT3131*4A*	D*96VC0403BNA*	18,000	13,100	14.0	11.5	625	7359795	
CAPT3131*4A*	DD80VC0603B*A*	18,000	13,100	14.0	11.5	675	6525007	
CAPT3131*4A*	D*96VE0603BNA*	17,400	12,700	14.0	11.5	550	7367033	

See Notes on Page 24.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0181A* (cont.)	CAPT3131*4A*	D*96VC0803BNA*	18,000	13,100	14.0	11.5	630	7359797
	CAPT3131*4A*	D*96VE0803BNA*	17,800	13,000	14.0	11.5	575	7367038
	CAPT3131*4A*	D*97MC0603BNA*	18,000	13,100	14.0	11.5	600	7359798
	CAPT3131*4A*	D*97MC0803BNA*	18,000	13,100	14.0	11.5	630	7359799
	CAPT3131*4A*	D*96VC0603BNA*	18,000	13,100	14.0	11.5	600	7359796
	CAPT3131*4A*	D*96VE0402BNA*	17,800	13,000	14.0	11.5	600	7367028
	CAPT3131*4A*+EEP		18,000	13,100	13.0	11.0	600	6524142
	CAPT3131*4A*+MBVC1200** -1A*		18,000	13,100	14.0	11.5	600	6524144
	CHPF1824A6C*+EEP		18,000	13,100	13.0	11.0	600	6524146
	CHPF2430B6C*	D*80VC0604B*A*	17,700	12,900	14.0	11.5	660	6524183
	CHPF2430B6C*	D*96VC0803BNA*	18,000	13,100	14.0	11.5	630	7359802
	CHPF2430B6C*	D*96VC0603BNA*	18,000	13,100	14.0	11.5	600	7359801
	CHPF2430B6C*	D*80HE0603B*A*	18,000	13,100	14.0	11.5	640	6524179
	CHPF2430B6C*	D*97MC0603BNA*	18,000	13,100	14.0	11.5	600	7359803
	CHPF2430B6C*	D*96VC0403BNA*	18,000	13,100	14.0	11.5	625	7359800
	CHPF2430B6C*	D*96VE0402BNA*	17,800	13,000	14.0	11.5	600	7367029
	CHPF2430B6C*	D*97MC0803BNA*	18,000	13,100	14.0	11.5	630	7359804
	CHPF2430B6C*	D*96VE0603BNA*	17,400	12,700	14.0	11.5	550	7367034
	CHPF2430B6C*	D*96VE0803BNA*	17,800	13,000	14.0	11.5	575	7367039
	CHPF2430B6C*	D*96VE0302BNA*	17,800	13,000	14.0	11.5	600	7367024
	CHPF2430B6C*+EEP		18,000	13,100	13.0	11.0	600	6524148
	CHPF2430B6C*+MBVC1200** -1A*		18,200	13,300	14.0	11.5	650	6524150
	CHPF2430B6C*+TXV	D*96VE0603BNA*	17,400	12,700	14.0	11.5	550	7367035
	CHPF2430B6C*+TXV	D*96VE0302BNA*	17,800	13,000	14.0	11.5	600	7367025
	CHPF2430B6C*+TXV	D*97MC0603BNA*	18,000	13,100	14.0	11.5	600	7359808
	CHPF2430B6C*+TXV	D*97MC0803BNA*	18,000	13,100	14.0	11.5	630	7359809
	CHPF2430B6C*+TXV	D*96VE0803BNA*	17,800	13,000	14.0	11.5	575	7367040
	CHPF2430B6C*+TXV	D*96VC0403BNA*	18,000	13,100	14.0	11.5	625	7359805
	CHPF2430B6C*+TXV	D*96VC0803BNA*	18,000	13,100	14.0	11.5	630	7359807
	CHPF2430B6C*+TXV	D*96VC0603BNA*	18,000	13,100	14.0	11.5	600	7359806
	CHPF2430B6C*+TXV	D*96VE0402BNA*	17,800	13,000	14.0	11.5	600	7367030
	CHPF3636B6C*	D*96VC0603BNA*	18,200	13,300	14.0	11.5	600	7359811
	CHPF3636B6C*	D*97MC0603BNA*	18,200	13,300	14.0	11.5	600	7359813
	CHPF3636B6C*	D*97MC0803BNA*	18,200	13,300	14.0	11.5	630	7359814
	CHPF3636B6C*	D*96VC0803BNA*	18,200	13,300	14.0	11.5	630	7359812
	CHPF3636B6C*	D*96VC0403BNA*	18,200	13,300	14.0	11.5	625	7359810
	CHPF3636B6C*+TXV	D*96VC0603BNA*	18,200	13,300	14.0	11.5	600	7359816
	CHPF3636B6C*+TXV	D*96VC0403BNA*	18,200	13,300	14.0	11.5	625	7359815
	CHPF3636B6C*+TXV	D*96VC0803BNA*	18,200	13,300	14.0	11.5	630	7359817
	CHPF3636B6C*+TXV	D*97MC0603BNA*	18,200	13,300	14.0	11.5	600	7359818
	CHPF3636B6C*+TXV	D*97MC0803BNA*	18,200	13,300	14.0	11.5	630	7359819
	CSCF1824N6D*	D*96VC0603BNA*	18,000	13,100	14.0	11.5	600	7359821
	CSCF1824N6D*	D*96VC0803BNA*	18,000	13,100	14.0	11.5	630	7359822
	CSCF1824N6D*	D*96VC0403BNA*	18,000	13,100	14.0	11.5	625	7359820
	CSCF1824N6D*	D*80HE0603B*A*	18,000	13,100	14.0	11.5	640	6524180
	CSCF1824N6D*	D*97MC0603BNA*	18,000	13,100	14.0	11.5	600	7359823
	CSCF1824N6D*	D*97MC0803BNA*	18,000	13,100	14.0	11.5	630	7359824
	CSCF1824N6D*	D*80VC0604B*A*	17,700	12,900	14.0	11.5	660	6524184
	CSCF1824N6D*+EEP		18,000	13,100	13.0	11.0	600	6524152
	CSCF1824N6D*+TXV	D*97MC0603BNA*	18,000	13,100	14.0	11.5	600	7359828
CSCF1824N6D*+TXV	D*97MC0803BNA*	18,000	13,100	14.0	11.5	630	7359829	
CSCF1824N6D*+TXV	D*96VC0803BNA*	18,000	13,100	14.0	11.5	630	7359827	
CSCF1824N6D*+TXV	D*96VC0403BNA*	18,000	13,100	14.0	11.5	625	7359825	
CSCF1824N6D*+TXV	D*96VC0603BNA*	18,000	13,100	14.0	11.5	600	7359826	
CSCF3036N6D*	D*97MC0803BNA*	18,200	13,300	14.0	11.5	630	7359834	

See Notes on Page 34.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0181A* (cont.)	CSCF3036N6D*	D*97MC0603BNA*	18,200	13,300	14.0	11.5	600	7359833
	CSCF3036N6D*	D*96VC0803BNA*	18,200	13,300	14.0	11.5	630	7359832
	CSCF3036N6D*	D*96VC0603BNA*	18,200	13,300	14.0	11.5	600	7359831
	CSCF3036N6D*	D*96VC0403BNA*	18,200	13,300	14.0	11.5	625	7359830
	CSCF3036N6D*+TXV	D*96VC0603BNA*	18,200	13,300	14.0	11.5	600	7359836
	CSCF3036N6D*+TXV	D*97MC0603BNA*	18,200	13,300	14.0	11.5	600	7359838
	CSCF3036N6D*+TXV	D*97MC0803BNA*	18,200	13,300	14.0	11.5	630	7359839
	CSCF3036N6D*+TXV	D*96VC0403BNA*	18,200	13,300	14.0	11.5	625	7359835
	CSCF3036N6D*+TXV	D*96VC0803BNA*	18,200	13,300	14.0	11.5	630	7359837
	DV24PTCB14A*		17,600	12,800	14.0	12.0	600	6524120
	DV25PTCB14A*		17,800	13,000	14.0	12.0	640	8996398
	DV29PTCB14A*		18,000	13,100	14.0	12.0	585	8996399
	DV30PTCC14A*		18,000	13,100	14.0	12.0	615	6524124
DX13SA 0241A*	ACNF24XX16D*		22,400	16,600	13.0	11.0	770	6525010
	ACNF30XX16D*		22,600	16,700	13.0	11.0	845	6525012
	ARUF24B14C*+TXV		22,000	16,300	13.0	11.0	800	7084868
	ARUF29B14A*		23,400	17,300	13.0	11.0	860	7988965
	ASPT30C14A*		23,400	17,300	14.0	12.0	845	6525028
	AVPTC24B14A*		22,600	16,700	14.0	12.0	800	6525037
	AVPTC30C14A*		23,400	17,300	14.0	12.0	780	6525041
	AWUF24XX16B*		23,000	17,000	13.0	11.0	800	6525044
	AWUF30XX16B*		23,200	17,200	13.0	11.0	800	6525046
	AWUF31XX16A*		23,000	17,000	14.0	11.3	800	6525048
	AWUF32XX16A*		23,000	17,000	14.0	11.3	800	6525050
	CA*F1824*6D*	D*96VE0302BNA*	23,000	17,000	14.0	11.5	800	7367041
	CA*F1824*6D*	D*97MC0803BNA*	23,000	17,000	14.0	11.5	810	7359845
	CA*F1824*6D*	D*96VE0803BNA*	23,000	17,000	14.0	11.5	775	7367056
	CA*F1824*6D*	D*80VC0604B*A*	23,000	17,000	14.0	11.6	820	6525102
	CA*F1824*6D*	D*80HE0603B*A*	23,000	17,000	14.0	11.5	860	6525099
	CA*F1824*6D*	D*97MC0804CNA*	23,000	17,000	14.0	11.5	800	7359846
	CA*F1824*6D*	D*96VC0804CNA*	23,000	17,000	14.0	11.5	800	7359843
	CA*F1824*6D*	D*97MC0603BNA*	23,000	17,000	14.0	11.5	815	7359844
	CA*F1824*6D*	D*96VC0603BNA*	23,000	17,000	14.0	11.5	815	7359841
	CA*F1824*6D*	D*96VC0403BNA*	23,000	17,000	14.0	11.5	805	7359840
	CA*F1824*6D*	D*96VE0603BNA*	23,000	17,000	14.0	11.5	775	7367051
	CA*F1824*6D*	D*96VE0402BNA*	23,000	17,000	14.0	11.5	775	7367046
	CA*F1824*6D*	D*96VC0803BNA*	23,000	17,000	14.0	11.5	810	7359842
	CA*F1824*6D*+EEP		23,000	17,000	13.0	11.0	800	6525052
	CA*F1824*6D*+MBVC1200*-1A*		23,000	17,000	14.0	11.5	800	6525054
	CA*F1824*6D*+TXV	D*96VC0804CNA*	23,000	17,000	14.0	11.5	800	7359850
	CA*F1824*6D*+TXV	D*97MC0803BNA*	23,000	17,000	14.0	11.5	810	7359852
	CA*F1824*6D*+TXV	D*97MC0804CNA*	23,000	17,000	14.0	11.5	800	7359853
	CA*F1824*6D*+TXV	D*96VE0803BNA*	23,000	17,000	14.0	11.5	775	7367057
	CA*F1824*6D*+TXV	D*96VE0603BNA*	23,000	17,000	14.0	11.5	775	7367052
	CA*F1824*6D*+TXV	D*96VE0302BNA*	23,000	17,000	14.0	11.5	800	7367042
	CA*F1824*6D*+TXV	D*96VE0402BNA*	23,000	17,000	14.0	11.5	775	7367047
	CA*F1824*6D*+TXV	D*97MC0603BNA*	23,000	17,000	14.0	11.5	815	7359851
	CA*F1824*6D*+TXV	D*96VC0603BNA*	23,000	17,000	14.0	11.5	815	7359848
	CA*F1824*6D*+TXV	D*96VC0803BNA*	23,000	17,000	14.0	11.5	810	7359849
	CA*F1824*6D*+TXV	D*96VC0403BNA*	23,000	17,000	14.0	11.5	805	7359847
	CA*F3030*6D*+EEP		23,000	17,000	13.0	11.0	800	6525056
	CA*F3030*6D*+EEP+TXV		23,000	17,000	13.0	11.0	800	6525058
	CA*F3131*6D*+EEP		23,000	17,000	13.0	11.0	800	6525060
	CA*F3131*6D*+EEP+TXV		23,000	17,000	13.0	11.0	800	6525062

See Notes on Page 24.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0241A* (cont.)	CA*F3636*6D*	D*97MC0603BNA*	23,600	17,500	14.0	11.5	815	7359857
	CA*F3636*6D*	D*96VC0603BNA*	23,600	17,500	14.0	11.5	815	7359855
	CA*F3636*6D*	D*97MC0803BNA*	23,600	17,500	14.0	11.5	810	7359858
	CA*F3636*6D*	D*96VC0403BNA*	23,600	17,500	14.0	11.5	805	7359854
	CA*F3636*6D*	D*96VC0803BNA*	23,600	17,500	14.0	11.5	810	7359856
	CA*F3636*6D*+EEP		23,000	17,000	13.0	11.0	800	6525064
	CA*F3636*6D*+EEP+TXV		23,000	17,000	13.0	11.0	800	6525066
	CA*F3636*6D*+TXV	D*97MC0603BNA*	23,600	17,500	14.0	11.5	815	7359862
	CA*F3636*6D*+TXV	D*96VC0603BNA*	23,600	17,500	14.0	11.5	815	7359860
	CA*F3636*6D*+TXV	D*96VC0403BNA*	23,600	17,500	14.0	11.5	805	7359859
	CA*F3636*6D*+TXV	D*97MC0803BNA*	23,600	17,500	14.0	11.5	810	7359863
	CA*F3636*6D*+TXV	D*96VC0803BNA*	23,600	17,500	14.0	11.5	810	7359861
	CA*F3743*6D*	D*97MC0804CNA*	23,600	17,500	14.0	11.5	800	7359865
	CA*F3743*6D*	D*96VC0804CNA*	23,600	17,500	14.0	11.5	800	7359864
	CA*F3743*6D*+TXV	D*97MC0804CNA*	23,600	17,500	14.0	11.5	800	7359867
	CA*F3743*6D*+TXV	D*96VC0804CNA*	23,600	17,500	14.0	11.5	800	7359866
	CAPT3131*4A*	D*97MC0804CNA*	23,000	17,000	14.0	11.5	800	7359874
	CAPT3131*4A*	D*97MC0603BNA*	23,000	17,000	14.0	11.5	815	7359872
	CAPT3131*4A*	D*80VC0604B*A*	23,000	17,000	14.0	11.5	830	6525103
	CAPT3131*4A*	D*97MC0803BNA*	23,000	17,000	14.0	11.5	810	7359873
	CAPT3131*4A*	DD80VC0603B*A*	23,000	17,000	14.0	11.5	800	6525119
	CAPT3131*4A*	D*96VC0804CNA*	23,000	17,000	14.0	11.5	800	7359871
	CAPT3131*4A*	D*96VE0603BNA*	23,000	17,000	14.0	11.5	775	7367053
	CAPT3131*4A*	D*80HE0603B*A*	23,000	17,000	14.0	11.5	800	6525100
	CAPT3131*4A*	D*96VE0302BNA*	23,000	17,000	14.0	11.5	800	7367043
	CAPT3131*4A*	D*96VC0803BNA*	23,000	17,000	14.0	11.5	810	7359870
	CAPT3131*4A*	D*96VE0803BNA*	23,000	17,000	14.0	11.5	775	7367058
	CAPT3131*4A*	D*96VC0403BNA*	23,000	17,000	14.0	11.5	805	7359868
	CAPT3131*4A*	D*96VC0603BNA*	23,000	17,000	14.0	11.5	815	7359869
	CAPT3131*4A*	D*96VE0402BNA*	23,000	17,000	14.0	11.5	775	7367048
	CAPT3131*4A*+EEP		22,800	16,900	13.0	11.0	800	6525068
	CAPT3131*4A*+MBVC1200**-1A*		22,800	16,900	14.0	11.5	800	6525070
	CAPT3743*4A*	D*96VC0804CNA*	23,600	17,500	14.0	11.5	800	7359875
	CAPT3743*4A*	D*97MC0804CNA*	23,600	17,500	14.0	11.5	800	7359876
	CHPF1824A6C*+EEP		23,000	17,000	13.0	11.0	800	6525072
	CHPF2430B6C*	D*96VE0402BNA*	23,000	17,000	14.0	11.5	775	7367049
	CHPF2430B6C*	D*97MC0603BNA*	23,200	17,200	14.0	11.5	815	7359880
	CHPF2430B6C*	D*96VE0603BNA*	23,000	17,000	14.0	11.5	775	7367054
	CHPF2430B6C*	D*96VE0803BNA*	23,000	17,000	14.0	11.5	775	7367059
	CHPF2430B6C*	D*96VC0603BNA*	23,200	17,200	14.0	11.5	815	7359878
	CHPF2430B6C*	D*80HE0603B*A*	23,000	17,000	14.0	11.5	860	6525101
	CHPF2430B6C*	D*96VC0803BNA*	23,200	17,200	14.0	11.5	810	7359879
	CHPF2430B6C*	D*96VC0403BNA*	23,200	17,200	14.0	11.5	805	7359877
	CHPF2430B6C*	D*97MC0803BNA*	23,200	17,200	14.0	11.5	810	7359881
	CHPF2430B6C*	D*96VE0302BNA*	23,000	17,000	14.0	11.5	800	7367044
	CHPF2430B6C*+EEP		23,000	17,000	13.0	11.0	800	6525074
	CHPF2430B6C*+MBVC1200**-1A*		23,400	17,300	14.0	11.5	800	6525076
	CHPF2430B6C*+TXV	D*96VC0403BNA*	23,200	17,200	14.0	11.5	805	7359882
	CHPF2430B6C*+TXV	D*96VE0302BNA*	23,000	17,000	14.0	11.5	800	7367045
	CHPF2430B6C*+TXV	D*96VE0803BNA*	23,000	17,000	14.0	11.5	775	7367060
CHPF2430B6C*+TXV	D*96VC0803BNA*	23,200	17,200	14.0	11.5	810	7359884	
CHPF2430B6C*+TXV	D*97MC0603BNA*	23,200	17,200	14.0	11.5	815	7359885	
CHPF2430B6C*+TXV	D*96VC0603BNA*	23,200	17,200	14.0	11.5	815	7359883	
CHPF2430B6C*+TXV	D*96VE0603BNA*	23,000	17,000	14.0	11.5	775	7367055	
CHPF2430B6C*+TXV	D*97MC0803BNA*	23,200	17,200	14.0	11.5	810	7359886	

See Notes on Page 24.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0241A* (cont.)	CHPF2430B6C*+TXV	D*96VE0402BNA*	23,000	17,000	14.0	11.5	775	7367050
	CHPF3636B6C*	D*96VC0803BNA*	23,400	17,300	14.0	11.5	810	7359889
	CHPF3636B6C*	D*97MC0603BNA*	23,400	17,300	14.0	11.5	815	7359890
	CHPF3636B6C*	D*97MC0803BNA*	23,400	17,300	14.0	11.5	810	7359891
	CHPF3636B6C*	D*96VC0403BNA*	23,400	17,300	14.0	11.5	805	7359887
	CHPF3636B6C*	D*96VC0603BNA*	23,400	17,300	14.0	11.5	815	7359888
	CHPF3636B6C*+TXV	D*96VC0603BNA*	23,400	17,300	14.0	11.5	815	7359893
	CHPF3636B6C*+TXV	D*96VC0403BNA*	23,400	17,300	14.0	11.5	805	7359892
	CHPF3636B6C*+TXV	D*97MC0603BNA*	23,400	17,300	14.0	11.5	815	7359895
	CHPF3636B6C*+TXV	D*97MC0803BNA*	23,400	17,300	14.0	11.5	810	7359896
	CHPF3636B6C*+TXV	D*96VC0803BNA*	23,400	17,300	14.0	11.5	810	7359894
	CHPF3642C6C*	D*96VC0804CNA*	23,400	17,300	14.0	11.5	800	7359897
	CHPF3642C6C*	D*97MC0804CNA*	23,400	17,300	14.0	11.5	800	7359898
	CHPF3642C6C*+TXV	D*96VC0804CNA*	23,400	17,300	14.0	11.5	800	7359899
	CHPF3642C6C*+TXV	D*97MC0804CNA*	23,400	17,300	14.0	11.5	800	7359900
	CSCF1824N6D*	D*97MC0603BNA*	23,000	17,000	14.0	11.5	815	7359905
	CSCF1824N6D*	D*97MC0803BNA*	23,000	17,000	14.0	11.5	810	7359906
	CSCF1824N6D*	D*96VC0803BNA*	23,000	17,000	14.0	11.5	810	7359903
	CSCF1824N6D*	D*96VC0603BNA*	23,000	17,000	14.0	11.5	815	7359902
	CSCF1824N6D*	D*96VC0403BNA*	23,000	17,000	14.0	11.5	805	7359901
	CSCF1824N6D*	D*97MC0804CNA*	23,000	17,000	14.0	11.5	800	7359907
	CSCF1824N6D*	D*96VC0804CNA*	23,000	17,000	14.0	11.5	800	7359904
	CSCF1824N6D*+EEP		23,000	17,000	13.0	11.0	800	6525078
	CSCF1824N6D*+TXV	D*96VC0603BNA*	23,000	17,000	14.0	11.5	815	7359909
	CSCF1824N6D*+TXV	D*97MC0603BNA*	23,000	17,000	14.0	11.5	815	7359912
	CSCF1824N6D*+TXV	D*96VC0403BNA*	23,000	17,000	14.0	11.5	805	7359908
	CSCF1824N6D*+TXV	D*97MC0803BNA*	23,000	17,000	14.0	11.5	810	7359913
	CSCF1824N6D*+TXV	D*96VC0804CNA*	23,000	17,000	14.0	11.5	800	7359911
	CSCF1824N6D*+TXV	D*96VC0803BNA*	23,000	17,000	14.0	11.5	810	7359910
	CSCF1824N6D*+TXV	D*97MC0804CNA*	23,000	17,000	14.0	11.5	800	7359914
	CSCF3036N6D*	D*97MC0804CNA*	23,200	17,200	14.0	11.5	800	7359921
	CSCF3036N6D*	D*96VC0403BNA*	23,200	17,200	14.0	11.5	805	7359915
	CSCF3036N6D*	D*96VC0804CNA*	23,200	17,200	14.0	11.5	800	7359918
	CSCF3036N6D*	D*97MC0603BNA*	23,200	17,200	14.0	11.5	815	7359919
	CSCF3036N6D*	D*96VC0603BNA*	23,200	17,200	14.0	11.5	815	7359916
	CSCF3036N6D*	D*97MC0803BNA*	23,200	17,200	14.0	11.5	810	7359920
	CSCF3036N6D*	D*96VC0803BNA*	23,200	17,200	14.0	11.5	810	7359917
	CSCF3036N6D*+TXV	D*97MC0603BNA*	23,200	17,200	14.0	11.5	815	7359926
	CSCF3036N6D*+TXV	D*97MC0803BNA*	23,200	17,200	14.0	11.5	810	7359927
	CSCF3036N6D*+TXV	D*96VC0804CNA*	23,200	17,200	14.0	11.5	800	7359925
	CSCF3036N6D*+TXV	D*96VC0403BNA*	23,200	17,200	14.0	11.5	805	7359922
	CSCF3036N6D*+TXV	D*96VC0803BNA*	23,200	17,200	14.0	11.5	810	7359924
CSCF3036N6D*+TXV	D*97MC0804CNA*	23,200	17,200	14.0	11.5	800	7359928	
CSCF3036N6D*+TXV	D*96VC0603BNA*	23,200	17,200	14.0	11.5	815	7359923	
DV24PTCB14A*		22,600	16,700	14.0	12.0	800	6525038	
DV30PTCC14A*		23,400	17,300	14.0	12.0	780	6525042	

¹ BTU/h

² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Daikin brand gas furnace contains the EEP cooling time delay.
- HSK - Hard Start Kit: This is an additional capacitor to assist with compressor start-up, used with the standard "run" capacitor that is supplied in the unit. Order from a Daikin distributor or service department.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0301A*	ACNF30XX16D*		27,600	20,800	13.0	11.0	890	6525162
	ARUF29B14A*		28,400	21,400	13.0	11.0	1,065	7988966
	ARUF30B14A*+TXV		27,000	20,400	13.0	11.0	900	6525168
	ARUF36C14B*+TXV		27,200	20,600	13.5	11.5	1,000	6525172
	ASPT36C14A*		28,000	21,200	14.0	12.0	1,010	6525176
	ASPT37B14A*		29,000	21,800	14.0	12.0	950	8245708
	AVPTC36C14A*		28,000	21,200	14.0	12.0	1,015	6525188
	AWUF30XX16B*		27,600	20,800	13.0	11.0	1,000	6525190
	AWUF36XX16B*		27,800	21,000	13.0	11.0	1,000	6525192
	AWUF37XX16B*		28,000	21,200	13.0	11.0	1,000	6525194
	CA*F3030*6D*	D*96VC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359931
	CA*F3030*6D*	D*96VC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359930
	CA*F3030*6D*	D*96VE0803BNA*	28,400	21,400	13.5	11.5	1,000	7367084
	CA*F3030*6D*	D*97MC0804CNA*	28,400	21,400	14.0	11.5	1,000	7359935
	CA*F3030*6D*	D*97MC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359933
	CA*F3030*6D*	D*96VC0403BNA*	28,400	21,400	14.0	11.5	1,000	7359929
	CA*F3030*6D*	DD80VC0603B*A*	28,000	21,200	13.5	11.3	1,050	6525365
	CA*F3030*6D*	D*80VC0604B*A*	28,200	21,200	13.5	11.3	1,050	6525261
	CA*F3030*6D*	D*96VE0302BNA*	28,000	21,200	13.5	11.5	1,000	7367061
	CA*F3030*6D*	D*96VC0804CNA*	28,400	21,400	14.0	11.5	1,000	7359932
	CA*F3030*6D*	D*96VE0402BNA*	28,400	21,400	13.5	11.5	1,000	7367068
	CA*F3030*6D*	D*96VE0603BNA*	28,400	21,400	13.5	11.5	1,000	7367076
	CA*F3030*6D*	D*97MC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359934
	CA*F3030*6D*+EEP		28,400	21,400	13.0	11.0	1,050	6525196
	CA*F3030*6D*+TXV	D*96VE0803BNA*	28,400	21,400	13.5	11.5	1,000	7367085
	CA*F3030*6D*+TXV	D*96VC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359937
	CA*F3030*6D*+TXV	D*96VE0402BNA*	28,400	21,400	14.0	11.5	1,000	7367069
	CA*F3030*6D*+TXV	D*96VE0603BNA*	28,400	21,400	13.5	11.5	1,000	7367077
	CA*F3030*6D*+TXV	D*96VE0302BNA*	28,400	21,400	14.0	11.5	1,000	7367062
	CA*F3030*6D*+TXV	D*97MC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359940
	CA*F3030*6D*+TXV	D*97MC0804CNA*	28,400	21,400	14.0	11.5	1,000	7359942
	CA*F3030*6D*+TXV	D*96VC0403BNA*	28,400	21,400	14.0	11.5	1,000	7359936
	CA*F3030*6D*+TXV	D*97MC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359941
	CA*F3030*6D*+TXV	D*96VC0804CNA*	28,400	21,400	14.0	11.5	1,000	7359939
	CA*F3030*6D*+TXV	D*96VC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359938
	CA*F3131*6D*	D*96VE0603BNA*	28,600	21,600	13.5	11.5	1,000	7367078
	CA*F3131*6D*	DD80VC0603B*A*	28,000	21,200	13.5	11.5	1,050	6525366
	CA*F3131*6D*	D*80VC0604B*A*	28,200	21,200	13.5	11.5	1,050	6525262
	CA*F3131*6D*	D*96VE0402BNA*	28,600	21,600	14.0	11.5	1,000	7367070
	CA*F3131*6D*	D*96VE0803BNA*	28,600	21,600	13.5	11.5	1,000	7367086
	CA*F3131*6D*	D*96VE0302BNA*	28,600	21,600	14.0	11.5	1,000	7367063
	CA*F3131*6D*+EEP		28,600	21,600	13.0	11.0	1,050	6525198
	CA*F3131*6D*+MBVC1200*-1A*		28,400	21,400	14.0	11.5	950	6525200
	CA*F3131*6D*+TXV	D*96VE0803BNA*	28,600	21,600	13.5	11.5	1,000	7367087
	CA*F3131*6D*+TXV	D*96VE0402BNA*	28,600	21,600	14.0	11.5	1,000	7367071
	CA*F3131*6D*+TXV	D*96VE0302BNA*	28,600	21,600	14.0	11.5	1,000	7367064
	CA*F3131*6D*+TXV	D*96VE0603BNA*	28,600	21,600	13.5	11.5	1,000	7367079
	CA*F3137*6A*	D*96VC0803BNA*	28,400	21,400	14.0	11.5	1,025	7489706
	CA*F3137*6A*	D*80VC0604B*A*	28,400	21,400	14.0	11.5	990	7489703
	CA*F3137*6A*	D*96VC0403BNA*	28,400	21,400	14.0	11.5	985	7489704
CA*F3137*6A*	D*96VE0803BNA*	28,400	21,400	13.5	11.5	1,010	7489702	
CA*F3137*6A*	D*96VE0603BNA*	28,400	21,400	14.0	11.5	1,020	7489701	
CA*F3137*6A*	D*96VE0402BNA*	28,000	21,200	13.5	11.5	935	7489700	
CA*F3137*6A*	D*97MC0603BNA*	28,400	21,400	14.0	11.5	985	7489707	
CA*F3137*6A*	D*96VC0603BNA*	28,400	21,400	14.0	11.5	985	7489705	
CA*F3137*6A*	D*97MC0803BNA*	28,400	21,400	14.0	11.5	1,025	7489708	

See Notes on Page 24.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0301A* (cont.)	CA*F3137*6A*+EEP		28,400	21,400	13.0	11.0	1,000	7489687
	CA*F3137*6A*+EEP+TXV		28,400	21,400	13.5	11.0	1,000	7489688
	CA*F3137*6A*+MBVC1200**-1A*		28,400	21,400	14.0	11.5	1,025	7489689
	CA*F3137*6A*+MBVC1200**-1A*+TXV		28,400	21,400	14.0	11.5	1,025	7489690
	CA*F3137*6A*+TXV	D*97MC0603BNA*	28,400	21,400	14.0	11.5	985	7489698
	CA*F3137*6A*+TXV	D*96VE0803BNA*	28,400	21,400	13.5	11.5	1,010	7489693
	CA*F3137*6A*+TXV	D*96VE0402BNA*	28,000	21,200	14.0	11.5	935	7489691
	CA*F3137*6A*+TXV	D*97MC0803BNA*	28,400	21,400	14.0	11.5	1,025	7489699
	CA*F3137*6A*+TXV	D*96VE0603BNA*	28,400	21,400	14.0	11.5	1,020	7489692
	CA*F3137*6A*+TXV	D*96VC0803BNA*	28,400	21,400	14.0	11.5	1,025	7489697
	CA*F3137*6A*+TXV	D*96VC0403BNA*	28,400	21,400	14.0	11.5	985	7489695
	CA*F3137*6A*+TXV	D*80VC0604B*A*	28,400	21,400	14.0	11.5	990	7489694
	CA*F3137*6A*+TXV	D*96VC0603BNA*	28,400	21,400	14.0	11.5	985	7489696
	CA*F3636*6D*+EEP		28,400	21,400	13.0	11.0	1,000	6525202
	CA*F3636*6D*+EEP+TXV		28,400	21,400	13.0	11.0	1,000	6525204
	CA*F3642*6D*+EEP		28,400	21,400	13.0	11.0	1,000	6525206
	CA*F3642*6D*+EEP+TXV		28,400	21,400	13.0	11.0	1,000	6525208
	CA*F3743*6D*	D*96VC0804CNA*	28,600	21,600	14.0	11.5	1,000	7359943
	CA*F3743*6D*	D*97MC0804CNA*	28,600	21,600	14.0	11.5	1,000	7359944
	CA*F3743*6D*+EEP		28,400	21,400	13.5	11.0	1,000	6525210
	CA*F3743*6D*+EEP+TXV		28,400	21,400	13.5	11.0	1,000	6525212
	CA*F3743*6D*+TXV	D*97MC0804CNA*	28,200	21,200	14.0	11.5	1,000	7359946
	CA*F3743*6D*+TXV	D*96VE0402BNA*	28,600	21,600	14.0	11.5	1,000	7367073
	CA*F3743*6D*+TXV	D*96VE0603BNA*	28,800	21,800	14.0	11.5	1,000	7367080
	CA*F3743*6D*+TXV	D*96VE0803BNA*	28,600	21,600	14.0	11.5	1,000	7367088
	CA*F3743*6D*+TXV	D*96VC0804CNA*	28,200	21,200	14.0	11.5	1,000	7359945
	CAPT3131*4A*	D*97MC0804CNA*	28,000	21,200	13.5	11.5	1,000	7359953
	CAPT3131*4A*	D*96VC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359948
	CAPT3131*4A*	D*97MC0803BNA*	28,000	21,200	13.5	11.5	1,030	7359952
	CAPT3131*4A*	D*96VC0403BNA*	28,000	21,200	13.5	11.5	1,000	7359947
	CAPT3131*4A*	D*96VC0803BNA*	28,000	21,200	13.5	11.5	1,030	7359949
	CAPT3131*4A*	D*97MC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359951
	CAPT3131*4A*	D*96VC0804CNA*	28,000	21,200	13.5	11.5	1,000	7359950
	CAPT3743*4A*	D*96VC0803BNA*	28,200	21,200	14.0	11.5	1,030	7359956
	CAPT3743*4A*	D*80VC0805C*A*	28,200	21,200	14.0	12.0	980	6525264
	CAPT3743*4A*	D*97MC0803BNA*	28,200	21,200	14.0	11.5	1,030	7359959
	CAPT3743*4A*	D*97MC0603BNA*	28,200	21,200	13.5	11.5	1,000	7359958
	CAPT3743*4A*	D*96VE0302BNA*	28,400	21,400	14.0	11.5	1,000	7367065
	CAPT3743*4A*	DD80VC1005C*A*	28,000	21,200	14.0	12.0	1,010	6525369
	CAPT3743*4A*	D*96VE0803BNA*	28,600	21,600	13.5	11.5	1,000	7367089
	CAPT3743*4A*	D*97MC0804CNA*	28,200	21,200	14.0	11.5	1,000	7359960
	CAPT3743*4A*	DD80VC0805C*A*	28,000	21,200	14.0	12.0	990	6525368
	CAPT3743*4A*	D*96VC0804CNA*	28,200	21,200	14.0	11.5	1,000	7359957
	CAPT3743*4A*	D*96VE0603BNA*	28,600	21,600	13.5	11.5	1,000	7367081
	CAPT3743*4A*	DD80VC0603B*A*	28,000	21,200	13.5	11.5	1,000	6525367
	CAPT3743*4A*	D*96VC0403BNA*	28,200	21,200	14.0	11.5	1,000	7359954
	CAPT3743*4A*	D*80HE0603B*A*	28,200	21,200	13.5	11.5	1,050	6525260
	CAPT3743*4A*	D*80VC1005C*A*	28,200	21,200	14.0	12.0	1,000	6525265
	CAPT3743*4A*	D*96VE0402BNA*	28,400	21,400	14.0	11.5	1,000	7367072
	CAPT3743*4A*	D*96VC0603BNA*	28,200	21,200	13.5	11.5	1,000	7359955
	CAPT3743*4A*	D*80VC0604B*A*	28,200	21,200	14.0	12.0	1,000	6525263
	CAPT3743*4A*+EEP		28,200	21,200	13.0	11.0	1,000	6525214
CAPT3743*4A*+MBVC1200**-1A*		28,000	21,200	14.0	11.5	900	6525216	
CAPT3743*4A*+MBVC1600**-1A*		28,200	21,200	14.0	11.5	1,000	6525218	
CHPF2430B6C*	D*96VC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359963	
CHPF2430B6C*	D*96VE0402BNA*	28,400	21,400	14.0	11.5	1,000	7367074	

See Notes on Page 24.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0301A* (cont.)	CHPF2430B6C*	D*97MC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359964
	CHPF2430B6C*	D*97MC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359965
	CHPF2430B6C*	D*96VE0302BNA*	28,400	21,400	14.0	11.5	1,000	7367066
	CHPF2430B6C*	D*96VC0403BNA*	28,400	21,400	14.0	11.5	1,000	7359961
	CHPF2430B6C*	D*96VC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359962
	CHPF2430B6C*+EEP		28,400	21,400	13.0	11.0	1,050	6525220
	CHPF2430B6C*+MBVC1200**~1A*		28,400	21,400	14.0	11.5	1,050	6525222
	CHPF2430B6C*+TXV	D*96VC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359967
	CHPF2430B6C*+TXV	D*96VE0302BNA*	28,400	21,400	14.0	11.5	1,000	7367067
	CHPF2430B6C*+TXV	D*96VC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359968
	CHPF2430B6C*+TXV	D*96VE0402BNA*	28,400	21,400	14.0	11.5	1,000	7367075
	CHPF2430B6C*+TXV	D*96VC0403BNA*	28,400	21,400	14.0	11.5	1,000	7359966
	CHPF2430B6C*+TXV	D*97MC0603BNA*	28,400	21,400	14.0	11.5	1,000	7359969
	CHPF2430B6C*+TXV	D*97MC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359970
	CHPF3636B6C*	D*96VE0603BNA*	28,400	21,400	13.5	11.5	1,000	7367082
	CHPF3636B6C*	D*96VE0803BNA*	28,400	21,400	13.5	11.5	1,000	7367090
	CHPF3636B6C*+TXV	D*96VE0603BNA*	28,400	21,400	14.0	11.5	1,000	7367083
	CHPF3636B6C*+TXV	D*96VE0803BNA*	28,400	21,400	14.0	11.5	1,000	7367091
	CHPF3642C6C*	D*97MC0804CNA*	28,400	21,400	14.0	11.5	1,000	7359972
	CHPF3642C6C*	D*96VC0804CNA*	28,400	21,400	14.0	11.5	1,000	7359971
	CHPF3642C6C*+TXV	D*97MC0804CNA*	28,400	21,400	14.0	11.5	1,000	7359974
	CHPF3642C6C*+TXV	D*96VC0804CNA*	28,400	21,400	14.0	11.5	1,000	7359973
	CSCF3036N6D*	D*96VC0603BNA*	28,400	21,400	14.0	11.3	1,000	7359976
	CSCF3036N6D*	D*97MC0603BNA*	28,400	21,400	14.0	11.3	1,000	7359979
	CSCF3036N6D*	D*96VC0804CNA*	28,200	21,200	14.0	11.5	1,000	7359978
	CSCF3036N6D*	D*96VC0403BNA*	28,400	21,400	14.0	11.5	1,000	7359975
	CSCF3036N6D*	D*97MC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359980
	CSCF3036N6D*	D*97MC0804CNA*	28,200	21,200	14.0	11.5	1,000	7359981
	CSCF3036N6D*	D*96VC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359977
	CSCF3036N6D*+EEP		28,400	21,400	13.0	11.0	1,000	6525224
	CSCF3036N6D*+TXV	D*97MC0603BNA*	28,400	21,400	14.0	11.3	1,000	7359986
	CSCF3036N6D*+TXV	D*97MC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359987
	CSCF3036N6D*+TXV	D*97MC0804CNA*	28,200	21,200	14.0	11.5	1,000	7359988
CSCF3036N6D*+TXV	D*96VC0403BNA*	28,400	21,400	14.0	11.5	1,000	7359982	
CSCF3036N6D*+TXV	D*96VC0803BNA*	28,400	21,400	14.0	11.5	1,030	7359984	
CSCF3036N6D*+TXV	D*96VC0603BNA*	28,400	21,400	14.0	11.3	1,000	7359983	
CSCF3036N6D*+TXV	D*96VC0804CNA*	28,200	21,200	14.0	11.5	1,000	7359985	
DV25PTCB14A*		28,000	21,200	13.5	11.5	875	8996400	
DV29PTCB14A*		28,400	21,400	14.0	12.0	925	8996401	
DV31PTCC14A*		29,000	21,800	14.0	12.0	930	8996402	
DV36PTCC14A*		28,000	21,200	14.0	12.0	1,015	6525187	
DX13SA 0361A*	ARUF36C14B*+TXV		34,000	26,400	13.0	11.0	1,165	6525382
	ARUF37C14A*		34,000	26,400	13.0	11.0	1,050	7988967
	ARUF42C14A*+TXV		34,200	26,600	13.0	11.0	1,150	6525386
	ASPT36C14A*		34,000	26,400	13.8	11.8	1,210	6525390
	ASPT37C14A*		34,200	26,600	14.0	12.0	1,120	8245709
	AVPTC36C14A*		34,000	26,400	13.8	11.8	1,215	6525402
	AVPTC42D14A*		34,600	27,000	14.0	12.0	1,225	6525406
	AVPTC48C14A*		34,000	26,400	14.0	12.0	1,100	7080460
	AWUF36XX16B*		33,400	26,000	13.0	11.0	1,150	6525408
	AWUF37XX16B*		33,600	26,200	13.0	11.0	1,150	6525410
	CA*F3137*6A*	D*80VC0604B*A*	34,000	26,400	14.0	11.5	1,095	7489725
	CA*F3137*6A*	D*80HE0603B*A*	34,000	26,400	14.0	11.5	1,100	7489722
	CA*F3137*6A*	D*96VC0403BNA*	34,000	26,400	13.5	11.0	1,050	7489726
	CA*F3137*6A*	D*96VE0603BNA*	34,000	26,400	13.5	11.0	1,090	7489723
CA*F3137*6A*	D*97MC0603BNA*	34,000	26,400	13.5	11.0	1,055	7489729	

See Notes on Page 24.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0361A* (cont.)	CA*F3137*6A*	D*96VC0603BNA*	34,000	26,400	13.5	11.0	1,055	7489727
	CA*F3137*6A*	D*97MC0803BNA*	34,000	26,400	13.5	11.0	1,100	7489730
	CA*F3137*6A*	D*96VE0803BNA*	34,000	26,400	13.5	11.0	1,090	7489724
	CA*F3137*6A*	D*96VC0803BNA*	34,000	26,400	13.5	11.0	1,100	7489728
	CA*F3137*6A*+EEP		34,000	26,400	13.0	11.0	1,200	7489709
	CA*F3137*6A*+EEP+TXV		34,000	26,400	13.5	11.0	1,200	7489710
	CA*F3137*6A*+MBVC1200**-1A*		34,000	26,400	14.0	11.5	1,050	7489711
	CA*F3137*6A*+MBVC1200**-1A*+TXV		34,000	26,400	14.0	11.5	1,050	7489712
	CA*F3137*6A*+TXV	D*96VE0603BNA*	34,000	26,400	13.5	11.0	1,090	7489714
	CA*F3137*6A*+TXV	D*97MC0803BNA*	34,000	26,400	14.0	11.5	1,100	7489721
	CA*F3137*6A*+TXV	D*96VC0803BNA*	34,000	26,400	14.0	11.5	1,100	7489719
	CA*F3137*6A*+TXV	D*97MC0603BNA*	34,000	26,400	14.0	11.5	1,055	7489720
	CA*F3137*6A*+TXV	D*80VC0604B*A*	34,000	26,400	14.0	11.5	1,095	7489716
	CA*F3137*6A*+TXV	D*80HE0603B*A*	34,000	26,400	14.0	11.5	1,100	7489713
	CA*F3137*6A*+TXV	D*96VC0603BNA*	34,000	26,400	14.0	11.5	1,055	7489718
	CA*F3137*6A*+TXV	D*96VC0403BNA*	34,000	26,400	14.0	11.5	1,050	7489717
	CA*F3137*6A*+TXV	D*96VE0803BNA*	34,000	26,400	13.5	11.0	1,090	7489715
	CA*F3636*6D*+EEP		33,600	26,200	13.0	11.0	1,200	6525412
	CA*F3642*6D*+EEP		33,600	26,200	13.0	11.0	1,200	6525414
	CA*F3642*6D*+MBVC1600**-1A*		34,000	26,400	14.0	11.5	1,200	6525416
	CA*F3743*6D*	D*96VC1205DNA*	34,000	26,400	13.5	11.3	1,150	7359991
	CA*F3743*6D*	D*97MC1205DNA*	34,000	26,400	13.5	11.3	1,150	7359994
	CA*F3743*6D*	D*97MC0804CNA*	34,000	26,400	13.0	11.0	1,115	7359992
	CA*F3743*6D*	D*97MC1005CNA*	34,000	26,400	13.5	11.3	1,175	7359993
	CA*F3743*6D*	D*96VE1004CNA*	33,600	26,200	13.5	11.5	1,100	7367096
	CA*F3743*6D*	D*96VC1005CNA*	34,000	26,400	13.5	11.3	1,175	7359990
	CA*F3743*6D*	D*96VC0804CNA*	34,000	26,400	13.0	11.0	1,115	7359989
	CA*F3743*6D*+EEP		34,200	26,600	13.0	11.0	1,200	6525418
	CA*F3743*6D*+EEP+TXV		34,200	26,600	13.5	11.0	1,200	6525420
	CA*F3743*6D*+MBVC1600**-1A*		34,000	26,400	14.0	11.5	1,210	6525422
	CA*F3743*6D*+TXV	D*97MC1205DNA*	34,000	26,400	13.5	11.3	1,150	7360000
	CA*F3743*6D*+TXV	D*96VE1004CNA*	33,600	26,200	14.0	11.5	1,100	7367097
	CA*F3743*6D*+TXV	D*96VE0803BNA*	33,400	26,000	13.5	11.0	1,075	7367094
	CA*F3743*6D*+TXV	D*96VE0603BNA*	33,600	26,200	13.5	11.0	1,175	7367092
	CA*F3743*6D*+TXV	D*96VC1005CNA*	34,000	26,400	13.5	11.3	1,175	7359996
	CA*F3743*6D*+TXV	D*96VC0804CNA*	34,000	26,400	13.5	11.3	1,115	7359995
	CA*F3743*6D*+TXV	D*97MC0804CNA*	34,000	26,400	13.5	11.3	1,115	7359998
	CA*F3743*6D*+TXV	D*96VC1205DNA*	34,000	26,400	13.5	11.3	1,150	7359997
	CA*F3743*6D*+TXV	D*97MC1005CNA*	34,000	26,400	13.5	11.3	1,175	7359999
	CAPT3743*4A*	D*96VC1205DNA*	34,000	26,400	13.5	11.3	1,150	7360003
	CAPT3743*4A*	D*97MC0804CNA*	34,000	26,400	13.0	11.0	1,115	7360004
	CAPT3743*4A*	DD80VC0805C*A*	34,000	26,400	13.5	11.5	1,190	6525680
	CAPT3743*4A*	D*96VE1004CNA*	33,600	26,200	13.5	11.3	1,100	7367098
	CAPT3743*4A*	D*97MC1205DNA*	34,000	26,400	13.5	11.3	1,150	7360006
	CAPT3743*4A*	D*80VC0604B*A*	34,000	26,400	13.5	11.5	1,220	6525502
	CAPT3743*4A*	D*80HE1005C*A*	34,000	26,400	13.5	11.5	1,230	6525501
	CAPT3743*4A*	D*97MC1005CNA*	34,000	26,400	13.0	11.0	1,175	7360005
	CAPT3743*4A*	D*96VC1005CNA*	34,000	26,400	13.0	11.0	1,175	7360002
	CAPT3743*4A*	D*96VC0804CNA*	34,000	26,400	13.0	11.0	1,115	7360001
	CAPT3743*4A*	D*80VC0805C*A*	34,000	26,400	13.5	11.5	1,190	6525503
	CAPT3743*4A*	D*80VC1005C*A*	34,000	26,400	13.5	11.5	1,210	6525504
	CAPT3743*4A*	DD80VC1005C*A*	34,000	26,400	13.5	11.5	1,235	6525681
CAPT3743*4A*	D*80HE0603B*A*	34,000	26,400	13.0	11.0	1,150	6525499	
CAPT3743*4A*	DD80VC0603B*A*	34,000	26,400	13.5	11.5	1,165	6525679	
CAPT3743*4A*	D*80HE0805C*A*	34,000	26,400	13.5	11.5	1,210	6525500	
CAPT3743*4A*+EEP		34,000	26,400	13.0	11.0	1,200	6525424	

See Notes on Page 32.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0361A* (cont.)	CAPT3743*4A*+MBVC1200**-1A*		34,000	26,400	13.0	11.5	1,200	6525426
	CAPT3743*4A*+MBVC1600**-1A*		34,000	26,400	14.0	11.5	1,205	6525428
	CAPT3743*4A*+MBVC2000**-1A*		34,000	26,400	14.0	11.5	1,205	6525430
	CHPF3636B6C*+EEP		34,000	26,400	13.0	11.0	1,200	6525432
	CHPF3642C6C*	D*97MC0804CNA*	33,800	26,400	13.0	11.0	1,115	7360009
	CHPF3642C6C*	D*97MC1005CNA*	34,000	26,400	13.5	11.3	1,175	7360010
	CHPF3642C6C*	D*96VC0804CNA*	33,800	26,400	13.0	11.0	1,115	7360007
	CHPF3642C6C*	D*96VC1005CNA*	34,000	26,400	13.5	11.3	1,175	7360008
	CHPF3642C6C*+EEP		34,000	26,400	13.0	11.0	1,200	6525434
	CHPF3642C6C*+MBVC1600**-1A*		34,000	26,400	14.0	11.5	1,210	6525436
	CHPF3642C6C*+TXV	D*96VC1005CNA*	34,000	26,400	13.5	11.3	1,175	7360012
	CHPF3642C6C*+TXV	D*96VC0804CNA*	33,800	26,400	13.5	11.3	1,115	7360011
	CHPF3642C6C*+TXV	D*97MC1005CNA*	34,000	26,400	13.5	11.3	1,175	7360014
	CHPF3642C6C*+TXV	D*97MC0804CNA*	33,800	26,400	13.5	11.3	1,115	7360013
	CHPF3642D6C*	D*97MC1205DNA*	34,000	26,400	13.5	11.3	1,150	7360016
	CHPF3642D6C*	D*96VC1205DNA*	34,000	26,400	13.5	11.3	1,150	7360015
	CHPF3642D6C*+EEP		34,000	26,400	13.0	11.0	1,200	6525438
	CHPF3642D6C*+TXV	D*97MC1205DNA*	34,000	26,400	13.5	11.3	1,150	7360018
	CHPF3642D6C*+TXV	D*96VC1205DNA*	34,000	26,400	13.5	11.3	1,150	7360017
	CHPF3743C6B*	D*96VE1004CNA*	33,600	26,200	13.5	11.3	1,100	7367099
	CHPF3743C6B*+TXV	D*96VE0603BNA*	33,600	26,200	13.5	11.0	1,175	7367093
	CHPF3743C6B*+TXV	D*96VE0803BNA*	33,400	26,000	13.5	11.0	1,075	7367095
	CHPF3743C6B*+TXV	D*96VE1004CNA*	33,600	26,200	14.0	11.5	1,100	7367100
	CSCF3036N6D*+EEP		34,000	26,400	13.0	11.0	1,200	7424600
	CSCF3642N6D*	D*96VC0804CNA*	33,600	26,200	13.0	11.0	1,115	7360019
	CSCF3642N6D*	D*97MC1205DNA*	33,600	26,200	13.5	11.3	1,150	7360024
	CSCF3642N6D*	D*97MC0804CNA*	33,600	26,200	13.0	11.0	1,115	7360022
	CSCF3642N6D*	D*96VC1005CNA*	33,800	26,400	13.5	11.3	1,175	7360020
	CSCF3642N6D*	D*97MC1005CNA*	33,800	26,400	13.5	11.3	1,175	7360023
	CSCF3642N6D*	D*96VC1205DNA*	33,600	26,200	13.5	11.3	1,150	7360021
	CSCF3642N6D*+EEP		34,600	27,000	13.0	11.0	1,200	7424602
	CSCF3642N6D*+TXV	D*96VC0804CNA*	33,600	26,200	13.0	11.0	1,115	7360025
	CSCF3642N6D*+TXV	D*97MC0804CNA*	33,600	26,200	13.0	11.0	1,115	7360028
	CSCF3642N6D*+TXV	D*97MC1205DNA*	33,600	26,200	13.5	11.3	1,150	7360030
	CSCF3642N6D*+TXV	D*96VC1005CNA*	33,800	26,400	13.5	11.3	1,175	7360026
	CSCF3642N6D*+TXV	D*96VC1205DNA*	33,600	26,200	13.5	11.3	1,150	7360027
	CSCF3642N6D*+TXV	D*97MC1005CNA*	33,800	26,400	13.5	11.3	1,175	7360029
	DV36PTCC14A*		34,000	26,400	13.8	11.8	1,215	6525401
	DV37PTCB14A*		34,600	27,000	13.5	11.5	1,080	8996403
	DV37PTCC14A*		35,000	27,200	14.0	12.0	1,130	8996404
DV37PTCD14A*		35,400	27,600	14.0	12.0	1,145	8996405	
DV42PTCD14A*		34,600	27,000	14.0	12.0	1,225	6525405	
DX13SA 0421A*	ARUF42C14A*+TXV		39,500	30,200	13.0	11.0	1,280	6525692
	ARUF43C14A*		40,500	31,000	13.0	11.0	1,345	7988969
	ARUF43D14A*		40,500	31,000	13.0	11.0	1,270	8171748
	ASPT47D14A*		40,000	30,600	14.0	12.0	1,200	8245710
	ASPT49D14A*		40,500	31,000	14.0	12.0	1,290	8245711
	AVPTC42D14A*		40,500	31,000	14.0	12.0	1,495	6525712
	AVPTC48C14A*		39,500	30,200	13.5	11.5	1,300	7080472
	CA*F3642*6D*	D*80HE0805C*A*	40,000	30,600	13.0	11.3	1,350	6525781
	CA*F3642*6D*+EEP		40,000	30,600	13.0	11.0	1,400	6525714
	CA*F3642*6D*+EEP+TXV		40,000	30,600	13.0	11.0	1,400	6525716
	CA*F3743*6D*	D*96VC1205DNA*	40,000	30,600	14.0	11.5	1,250	7360033
	CA*F3743*6D*	D*96VC0804CNA*	40,500	31,000	14.0	11.5	1,300	7360031
	CA*F3743*6D*	D*97MC1005CNA*	40,500	31,000	14.0	11.5	1,300	7360035
CA*F3743*6D*	D*80HE0805C*A*	40,000	30,600	13.0	11.3	1,350	6525782	

See Notes on Page 32.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0421A* (cont.)	CA*F3743*6D*	D*97MC1205DNA*	40,000	30,600	14.0	11.5	1,250	7360036
	CA*F3743*6D*	D*96VC1005CNA*	40,500	31,000	14.0	11.5	1,300	7360032
	CA*F3743*6D*	D*97MC0804CNA*	40,500	31,000	14.0	11.5	1,300	7360034
	CA*F3743*6D*+EEP		40,000	30,600	13.0	11.0	1,400	6525718
	CA*F3743*6D*+TXV	D*96VC1205DNA*	40,000	30,600	14.0	11.5	1,250	7360039
	CA*F3743*6D*+TXV	D*96VC0804CNA*	40,500	31,000	14.0	11.5	1,300	7360037
	CA*F3743*6D*+TXV	D*97MC1005CNA*	40,500	31,000	14.0	11.5	1,300	7360041
	CA*F3743*6D*+TXV	D*97MC0804CNA*	40,500	31,000	14.0	11.5	1,300	7360040
	CA*F3743*6D*+TXV	D*97MC1205DNA*	40,000	30,600	14.0	11.5	1,250	7360042
	CA*F3743*6D*+TXV	D*96VC1005CNA*	40,500	31,000	14.0	11.5	1,300	7360038
	CA*F4860*6D*	D*96VC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360045
	CA*F4860*6D*	D*97MC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360048
	CA*F4860*6D*	D*97MC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360047
	CA*F4860*6D*	D*96VC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360044
	CA*F4860*6D*	D*97MC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360046
	CA*F4860*6D*	D*96VE1004CNA*	39,500	30,200	14.0	11.5	1,275	7367101
	CA*F4860*6D*	D*80HE0805C*A*	41,000	31,400	13.5	11.5	1,510	6525783
	CA*F4860*6D*	D*96VC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360043
	CA*F4860*6D*	D*96VE1205DNA*	40,000	30,600	13.5	11.3	1,400	7367106
	CA*F4860*6D*+EEP		41,000	31,400	13.0	11.0	1,400	6525720
	CA*F4860*6D*+MBVC1600** -1A*		41,000	31,400	14.0	11.5	1,400	6525722
	CA*F4860*6D*+TXV	D*96VC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360050
	CA*F4860*6D*+TXV	D*97MC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360054
	CA*F4860*6D*+TXV	D*97MC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360053
	CA*F4860*6D*+TXV	D*96VC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360051
	CA*F4860*6D*+TXV	D*97MC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360052
	CA*F4860*6D*+TXV	D*96VE1205DNA*	40,000	30,600	14.0	11.5	1,400	7367107
	CA*F4860*6D*+TXV	D*96VC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360049
	CA*F4860*6D*+TXV	D*96VE1004CNA*	39,500	30,200	14.0	11.5	1,275	7367102
	CA*F4961*6D*+EEP		41,000	31,400	13.0	11.0	1,400	6525724
	CAPT4961*4A*	DD80VC1005C*A*	41,000	31,400	14.0	12.0	1,405	6994114
	CAPT4961*4A*	D*80HE0603B*A*	41,000	31,400	13.5	11.5	1,355	6994098
	CAPT4961*4A*	D*96VC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360057
	CAPT4961*4A*	D*97MC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360059
	CAPT4961*4A*	D*97MC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360060
	CAPT4961*4A*	D*80HE1005C*A*	41,000	31,400	14.0	12.0	1,300	6994100
	CAPT4961*4A*	D*96VE1205DNA*	40,500	31,000	14.0	11.5	1,400	7367108
	CAPT4961*4A*	DD80VC0805C*A*	41,000	31,400	14.0	12.0	1,380	6994113
	CAPT4961*4A*	D*96VC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360056
	CAPT4961*4A*	D*96VE1004CNA*	39,500	30,200	14.0	11.5	1,275	7367103
	CAPT4961*4A*	D*97MC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360058
	CAPT4961*4A*	D*96VC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360055
	CAPT4961*4A*	D*80HE0805C*A*	41,000	31,400	14.0	12.0	1,350	6994099
	CAPT4961*4A*+EEP		40,500	31,000	13.0	11.0	1,400	6525726
	CAPT4961*4A*+MBVC1600** -1A*		41,000	31,400	14.0	11.5	1,375	6525728
	CAPT4961*4A*+MBVC2000** -1A*		41,000	31,400	14.0	11.5	1,400	6525730
	CHPF3642C6C*	D*80HE0805C*A*	40,000	30,600	13.0	11.3	1,350	6525784
	CHPF3642C6C*+EEP		40,000	30,600	13.0	11.0	1,400	6525732
	CHPF3642D6C*+EEP		40,000	30,600	13.0	11.0	1,400	6525734
	CHPF3743C6B*	D*97MC1205DNA*	40,000	30,600	13.5	11.3	1,250	7360623
CHPF3743C6B*	D*96VC1205DNA*	40,000	30,600	13.5	11.3	1,250	7360622	
CHPF3743C6B*	D*97MC0804CNA*	40,500	31,000	13.5	11.3	1,300	7360063	
CHPF3743C6B*	D*97MC1005CNA*	40,500	31,000	13.5	11.3	1,300	7360064	
CHPF3743C6B*	D*96VC0804CNA*	40,500	31,000	13.5	11.3	1,300	7360061	
CHPF3743C6B*	D*96VC1005CNA*	40,500	31,000	13.5	11.3	1,300	7360062	
CHPF3743C6B*+EEP		40,000	30,600	13.0	11.0	1,400	6525736	

See Notes on Page 32.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0421A* (cont.)	CHPF3743C6B*+TXV	D*97MC0804CNA*	40,500	31,000	14.0	11.5	1,300	7360067
	CHPF3743C6B*+TXV	D*97MC1005CNA*	40,500	31,000	14.0	11.5	1,300	7360068
	CHPF3743C6B*+TXV	D*97MC1205DNA*	40,000	30,600	14.0	11.5	1,250	7360625
	CHPF3743C6B*+TXV	D*96VC1005CNA*	40,500	31,000	14.0	11.5	1,300	7360066
	CHPF3743C6B*+TXV	D*96VC1205DNA*	40,000	30,600	14.0	11.5	1,250	7360624
	CHPF3743C6B*+TXV	D*96VC0804CNA*	40,500	31,000	14.0	11.5	1,300	7360065
	CHPF4860D6D*	D*96VE1004CNA*	39,500	30,200	14.0	11.5	1,275	7367104
	CHPF4860D6D*	D*96VE1205DNA*	40,500	31,000	13.5	11.3	1,400	7367109
	CHPF4860D6D*	D*97MC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360072
	CHPF4860D6D*	D*96VC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360069
	CHPF4860D6D*	D*80HE0805C*A*	41,000	31,400	13.5	11.5	1,400	6525785
	CHPF4860D6D*	D*96VC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360071
	CHPF4860D6D*	D*96VC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360070
	CHPF4860D6D*	D*97MC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360074
	CHPF4860D6D*	D*97MC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360073
	CHPF4860D6D*+EEP		41,000	31,400	13.0	11.0	1,400	6525738
	CHPF4860D6D*+MBVC1600**-1A*		41,000	31,400	14.0	11.5	1,400	6525740
	CHPF4860D6D*+TXV	D*97MC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360079
	CHPF4860D6D*+TXV	D*97MC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360078
	CHPF4860D6D*+TXV	D*96VC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360076
	CHPF4860D6D*+TXV	D*96VC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360077
	CHPF4860D6D*+TXV	D*96VC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360075
	CHPF4860D6D*+TXV	D*97MC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360080
	CHPF4860D6D*+TXV	D*96VE1205DNA*	40,500	31,000	14.0	11.5	1,400	7367110
	CHPF4860D6D*+TXV	D*96VE1004CNA*	39,500	30,200	14.0	11.5	1,275	7367105
	CSCF3642N6D*+EEP		40,000	30,600	13.0	11.0	1,325	6525742
	CSCF4860N6D*	D*96VC1005CNA*	41,000	31,400	13.5	11.5	1,300	7360082
	CSCF4860N6D*	D*97MC1205DNA*	40,500	31,000	13.5	11.3	1,250	7360086
	CSCF4860N6D*	D*97MC1005CNA*	41,000	31,400	13.5	11.5	1,300	7360085
	CSCF4860N6D*	D*96VC1205DNA*	40,500	31,000	13.5	11.3	1,250	7360083
	CSCF4860N6D*	D*96VC0804CNA*	41,000	31,400	13.5	11.3	1,300	7360081
	CSCF4860N6D*	D*97MC0804CNA*	41,000	31,400	13.5	11.3	1,300	7360084
	CSCF4860N6D*+EEP		41,000	31,400	13.0	11.0	1,325	6525744
	CSCF4860N6D*+TXV	D*97MC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360090
	CSCF4860N6D*+TXV	D*96VC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360088
	CSCF4860N6D*+TXV	D*97MC1005CNA*	41,000	31,400	14.0	11.5	1,300	7360091
	CSCF4860N6D*+TXV	D*97MC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360092
	CSCF4860N6D*+TXV	D*96VC0804CNA*	41,000	31,400	14.0	11.5	1,300	7360087
	CSCF4860N6D*+TXV	D*96VC1205DNA*	40,500	31,000	14.0	11.5	1,250	7360089
	DV42PTCD14A*		40,500	31,000	14.0	12.0	1,495	6525711
DV49PTCD14A*		41,000	31,400	14.0	12.0	1,320	8996408	
DV59PTCC14A*		40,000	30,600	14.0	12.0	1,290	8996406	
DV59PTCD14A*		40,500	31,000	14.0	12.0	1,365	8996407	
DX13SA 0481A*	ARUF47D14A*		45,000	34,600	13.0	11.0	1,515	7988970
	ARUF48D14A*+TXV		44,500	34,200	13.0	11.0	1,550	6525823
	ARUF49D14A*		45,000	34,600	13.0	11.0	1,455	8171749
	ARUF60D14A*+TXV		44,500	34,200	13.0	11.0	1,460	6525827
	ASPT49D14A*		45,000	34,600	14.0	11.5	1,430	8245712
	AVPTC48C14A*		44,000	33,800	13.0	11.0	1,450	7080484
	AVPTC48D14A*		46,000	35,200	13.8	11.3	1,615	6525843
	CA*F4860*6D*+EEP		46,000	35,200	13.0	11.0	1,600	6525845
	CA*F4860*6D*+MBVC2000**-1A*		46,000	35,200	14.0	11.3	1,600	6525847
	CA*F4860*6D*+TXV	D*96VE1004CNA*	46,000	35,200	14.0	11.5	1,550	7367111
	CA*F4860*6D*+TXV	D*80HE0805C*A*	46,000	35,200	13.5	11.3	1,650	6525891
	CA*F4860*6D*+TXV	D*80HE1005C*A*	46,000	35,200	13.5	11.3	1,570	6525893
	CA*F4961*6D*	D*96VE1205DNA*	45,500	34,800	14.0	11.5	1,525	7367116
	CA*F4961*6D*+EEP		46,000	35,200	13.0	11.0	1,600	6525849

See Notes on Page 32.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0481A* (cont.)	CA*F4961*6D*+TXV	D*96VC1205DNA*	46,000	35,200	14.0	11.5	1,575	7360095
	CA*F4961*6D*+TXV	D*97MC1205DNA*	46,000	35,200	14.0	11.5	1,575	7360098
	CA*F4961*6D*+TXV	D*97MC1005CNA*	45,000	34,600	14.0	11.5	1,520	7360097
	CA*F4961*6D*+TXV	D*96VC1005CNA*	45,000	34,600	14.0	11.5	1,520	7360094
	CA*F4961*6D*+TXV	D*96VC0804CNA*	45,000	34,600	14.0	11.5	1,585	7360093
	CA*F4961*6D*+TXV	D*96VE1004CNA*	46,000	35,200	14.0	11.5	1,550	7367112
	CA*F4961*6D*+TXV	D*96VE1205DNA*	46,000	35,200	14.0	11.5	1,525	7367117
	CA*F4961*6D*+TXV	D*97MC0804CNA*	45,000	34,600	14.0	11.5	1,585	7360096
	CAPT4961*4A*	D*96VE1004CNA*	46,000	35,200	14.0	11.5	1,550	7367113
	CAPT4961*4A*	D*96VE1205DNA*	46,000	35,200	13.5	11.3	1,525	7367118
	CAPT4961*4A*	DD80VC0805C*A*	47,000	36,000	13.5	11.5	1,585	6994145
	CAPT4961*4A*	D*97MC1005CNA*	45,000	34,600	14.0	11.5	1,520	7360103
	CAPT4961*4A*	D*97MC0804CNA*	45,000	34,600	13.5	11.3	1,585	7360102
	CAPT4961*4A*	D*80HE0805C*A*	46,000	35,200	13.5	11.5	1,480	6994132
	CAPT4961*4A*	D*96VC1005CNA*	45,000	34,600	14.0	11.5	1,520	7360100
	CAPT4961*4A*	D*97MC1205DNA*	46,000	35,200	14.0	11.5	1,575	7360104
	CAPT4961*4A*	DD80VC1005C*A*	47,000	36,000	13.5	11.5	1,620	6994146
	CAPT4961*4A*	D*80HE1005C*A*	47,000	36,000	13.5	11.5	1,570	6994133
	CAPT4961*4A*	D*96VC0804CNA*	45,000	34,600	13.5	11.3	1,585	7360099
	CAPT4961*4A*	D*96VC1205DNA*	46,000	35,200	14.0	11.5	1,575	7360101
	CAPT4961*4A*+EEP		46,500	35,600	13.0	11.0	1,600	6525851
	CAPT4961*4A*+MBVC1600**-1A*		47,000	36,000	14.0	11.5	1,500	6525853
	CAPT4961*4A*+MBVC2000**-1A*		47,000	36,000	14.0	11.5	1,550	6525855
	CHPF4860D6D*	D*96VE1004CNA*	45,500	34,800	13.5	11.5	1,550	7367114
	CHPF4860D6D*	D*96VE1205DNA*	45,500	34,800	13.5	11.3	1,525	7367119
	CHPF4860D6D*+EEP		46,000	35,200	13.0	11.0	1,600	6525857
	CHPF4860D6D*+MBVC2000**-1A*		46,000	35,200	14.0	11.3	1,600	6525859
	CHPF4860D6D*+TXV	D*97MC1205DNA*	46,000	35,200	14.0	11.5	1,575	7360110
	CHPF4860D6D*+TXV	D*80HE0805C*A*	46,000	35,200	13.5	11.3	1,650	6525892
	CHPF4860D6D*+TXV	D*96VC1205DNA*	46,000	35,200	14.0	11.5	1,575	7360107
	CHPF4860D6D*+TXV	D*97MC0804CNA*	45,000	34,600	14.0	11.5	1,585	7360108
	CHPF4860D6D*+TXV	D*96VE1205DNA*	45,500	34,800	14.0	11.5	1,525	7367120
	CHPF4860D6D*+TXV	D*96VC0804CNA*	45,000	34,600	14.0	11.5	1,585	7360105
	CHPF4860D6D*+TXV	D*80HE1005C*A*	46,000	35,200	13.5	11.3	1,570	6525894
	CHPF4860D6D*+TXV	D*96VC1005CNA*	45,000	34,600	14.0	11.5	1,520	7360106
	CHPF4860D6D*+TXV	D*97MC1005CNA*	45,000	34,600	14.0	11.5	1,520	7360109
	CHPF4860D6D*+TXV	D*96VE1004CNA*	45,500	34,800	14.0	11.5	1,550	7367115
	CSCF4860N6D*+EEP		46,000	35,200	13.0	11.0	1,600	6525861
	CSCF4860N6D*+TXV	D*97MC1205DNA*	45,500	34,800	14.0	11.5	1,575	7360116
	CSCF4860N6D*+TXV	D*96VC0804CNA*	44,500	34,200	13.5	11.3	1,585	7360111
	CSCF4860N6D*+TXV	D*96VC1005CNA*	44,500	34,200	14.0	11.5	1,520	7360112
	CSCF4860N6D*+TXV	D*97MC1005CNA*	44,500	34,200	14.0	11.5	1,520	7360115
	CSCF4860N6D*+TXV	D*96VC1205DNA*	45,500	34,800	14.0	11.5	1,575	7360113
	CSCF4860N6D*+TXV	D*97MC0804CNA*	44,500	34,200	13.5	11.3	1,585	7360114
	DV48PTCD14A*		46,000	35,200	13.8	11.3	1,615	6525842
	DV59PTCC14A*		45,000	34,600	13.0	11.0	1,485	8996409
	DV59PTCD14A*		45,500	34,800	14.0	12.0	1,580	9000372
	DV61PTCD14A*		46,000	35,200	14.0	12.0	1,455	9000373

¹ BTU/h

² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Daikin brand gas furnace contains the EEP cooling time delay.
- HSK - Hard Start Kit: This is an additional capacitor to assist with compressor start-up, used with the standard "run" capacitor that is supplied in the unit. Order from a Daikin distributor or service department.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0601A*	CA*F4961*6D*+TXV	D*97MC1005CNA*	54,000	38,500	13.0	11.0	1,600	7360121
	CA*F4961*6D*+TXV	D*96VC1005CNA*	54,000	38,500	13.0	11.0	1,600	7360118
	CA*F4961*6D*+TXV	D*96VC1205DNA*	54,000	38,500	13.5	11.5	1,585	7360119
	CA*F4961*6D*+TXV	D*97MC0804CNA*	54,000	38,500	13.5	11.0	1,585	7360120
	CA*F4961*6D*+TXV	D*96VC0804CNA*	54,000	38,500	13.5	11.0	1,585	7360117
	CA*F4961*6D*+TXV	D*96VE1205DNA*	56,500	40,000	13.0	11.0	1,950	7367121
	CA*F4961*6D*+TXV	D*97MC1205DNA*	54,000	38,500	13.5	11.5	1,585	7360122
	CAPT4961*4A*	D*96VE1205DNA*	56,500	40,000	13.0	11.0	1,950	7367122
	CAPT4961*4A*	D*97MC1205DNA*	54,000	38,500	13.0	11.0	1,585	7360128
	CAPT4961*4A*	D*97MC0804CNA*	54,000	38,500	13.0	11.0	1,585	7360126
	CAPT4961*4A*	D*96VC1205DNA*	54,000	38,500	13.0	11.0	1,585	7360125
	CAPT4961*4A*	D*97MC1005CNA*	54,000	38,500	13.0	11.0	1,600	7360127
	CAPT4961*4A*	D*96VC1005CNA*	54,000	38,500	13.0	11.0	1,600	7360124
	CAPT4961*4A*	D*96VC0804CNA*	54,000	38,500	13.0	11.0	1,585	7360123
	CHPF4860D6D*+TXV	D*96VC1205DNA*	54,000	38,500	13.5	11.5	1,585	7360131
	CHPF4860D6D*+TXV	D*97MC1205DNA*	54,000	38,500	13.5	11.5	1,585	7360134
	CHPF4860D6D*+TXV	D*97MC1005CNA*	54,000	38,500	13.0	11.0	1,600	7360133
	CHPF4860D6D*+TXV	D*96VC1005CNA*	54,000	38,500	13.0	11.0	1,600	7360130
	CHPF4860D6D*+TXV	D*96VC0804CNA*	54,000	38,500	13.5	11.0	1,585	7360129
	CHPF4860D6D*+TXV	D*97MC0804CNA*	54,000	38,500	13.5	11.0	1,585	7360132
	CHPF4860D6D*+TXV	D*96VE1205DNA*	56,500	40,000	13.0	11.0	1,950	7367123
	CSCF4860N6D*+TXV	D*97MC1205DNA*	53,500	38,000	13.5	11.0	1,585	7360140
	CSCF4860N6D*+TXV	D*97MC0804CNA*	54,000	38,500	13.0	11.0	1,585	7360138
	CSCF4860N6D*+TXV	D*97MC1005CNA*	54,000	38,500	13.0	11.0	1,600	7360139
	CSCF4860N6D*+TXV	D*96VC1005CNA*	54,000	38,500	13.0	11.0	1,600	7360136
	CSCF4860N6D*+TXV	D*96VC1205DNA*	53,500	38,000	13.5	11.0	1,585	7360137
	CSCF4860N6D*+TXV	D*96VC0804CNA*	54,000	38,500	13.0	11.0	1,585	7360135
	DV59PTCD14A*		55,000	39,000	13.0	11.0	1,660	8996410
	DV61PTCD14A*		56,000	40,000	13.5	11.5	1,775	8996411
	DX13SA 0611A*	ARUF61D14A*		55,500	38,000	13.0	11.0	1,520
ASPT61D14A*			56,000	38,500	14.0	11.5	1,645	8245713
AVPTC60D14A*			56,000	38,500	14.0	11.5	1,620	6526048
CA*F4860*6D*+EEP			55,000	37,600	13.0	11.0	1,500	6526050
CA*F4860*6D*+MBVC2000**.-1A*			56,000	38,500	13.5	11.5	1,575	6526052
CA*F4860*6D*+MBVC2000**.-1A*+TXV			56,000	38,500	14.0	11.5	1,575	6526054
CA*F4860*6D*+TXV		D*80VC0805C*A*	55,500	38,000	13.5	11.0	1,520	6526157
CA*F4860*6D*+TXV		D*80HE1005C*A*	55,000	37,600	13.5	11.0	1,525	6526152
CA*F4860*6D*+TXV		DD80VC1005C*A*	55,500	38,000	13.0	11.0	1,550	6526354
CA*F4860*6D*+TXV		DD80VC0805C*A*	55,500	38,000	13.0	11.0	1,500	6526351
CA*F4860*6D*+TXV		D*80VC1005C*A*	55,500	38,000	13.5	11.0	1,520	6526162
CA*F4860*6D*+TXV		D*80HE0805C*A*	55,500	38,000	13.0	11.0	1,550	6526147
CA*F4961*6D*+EEP			56,500	38,500	13.0	11.0	1,500	6526056
CA*F4961*6D*+MBVC2000**.-1A*			57,000	39,000	14.0	11.5	1,575	6526058
CA*F4961*6D*+MBVC2000**.-1A*+TXV			57,000	39,000	14.0	12.0	1,575	6526060
CA*F4961*6D*+TXV		D*80HE1005C*A*	56,000	38,500	14.0	11.5	1,525	6526153
CA*F4961*6D*+TXV		D*96VC1205DNA*	56,000	38,500	14.0	11.5	1,545	7360142
CA*F4961*6D*+TXV		D*80VC0805C*A*	56,500	38,500	14.0	11.5	1,520	6526158
CA*F4961*6D*+TXV		DD80VC0805C*A*	57,000	39,000	13.5	11.0	1,500	6526352
CA*F4961*6D*+TXV		D*80VC1005C*A*	56,500	38,500	14.0	11.5	1,520	6526163
CA*F4961*6D*+TXV		DD80VC1005C*A*	57,000	39,000	13.5	11.0	1,550	6526355
CA*F4961*6D*+TXV		D*96VC1005CNA*	56,000	38,500	13.5	11.5	1,520	7360141
CA*F4961*6D*+TXV		D*97MC1205DNA*	56,000	38,500	14.0	11.5	1,545	7360144
CA*F4961*6D*+TXV	D*97MC1005CNA*	56,000	38,500	13.5	11.5	1,520	7360143	

See Notes on Page 32.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
DX13SA 0611A* (cont.)	CA*F4961*6D*+TXV	D*80HE0805C*A*	56,000	38,500	14.0	11.5	1,550	6526148
	CA*F4961*6D*+TXV	D*96VE1205DNA*	56,000	38,500	14.0	11.5	1,525	7367124
	CAPT4961*4A*	D*80HE1005C*A*	56,000	38,500	14.0	11.5	1,525	6526154
	CAPT4961*4A*	D*97MC1005CNA*	56,000	38,500	13.5	11.0	1,520	7360147
	CAPT4961*4A*	D*96VE1205DNA*	56,000	38,500	13.5	11.5	1,525	7367125
	CAPT4961*4A*	D*96VC1205DNA*	56,000	38,500	13.5	11.5	1,545	7360146
	CAPT4961*4A*	DD80VC1005C*A*	57,000	39,000	13.5	11.0	1,550	6526356
	CAPT4961*4A*	D*96VC1005CNA*	56,000	38,500	13.5	11.0	1,520	7360145
	CAPT4961*4A*	D*80VC1005C*A*	56,500	38,500	14.0	11.5	1,520	6526164
	CAPT4961*4A*	D*97MC1205DNA*	56,000	38,500	13.5	11.5	1,545	7360148
	CAPT4961*4A*	D*80VC0805C*A*	56,500	38,500	14.0	11.5	1,520	6526159
	CAPT4961*4A*	D*80HE0805C*A*	56,000	38,500	14.0	11.5	1,550	6526149
	CAPT4961*4A*	DD80VC0805C*A*	57,000	39,000	13.5	11.0	1,500	6526353
	CAPT4961*4A*+EEP		56,500	38,500	13.5	11.0	1,500	6526062
	CAPT4961*4A*+MBVC1600**-1A*		57,000	39,000	13.5	11.5	1,560	6994350
	CAPT4961*4A*+MBVC2000**-1A*		57,000	39,000	14.0	12.0	1,575	6526064
	CHPF4860D6D*+EEP		56,000	38,500	13.0	11.0	1,500	6526066
	CHPF4860D6D*+MBVC2000**-1A*		57,000	39,000	14.0	11.5	1,575	6526068
	CHPF4860D6D*+MBVC2000**-1A*+TXV		57,000	39,000	14.0	11.5	1,575	6526070
	CHPF4860D6D*+TXV	D*97MC1005CNA*	56,000	38,500	13.5	11.0	1,520	7360151
	CHPF4860D6D*+TXV	D*80HE0805C*A*	56,000	38,500	14.0	11.5	1,550	6526150
	CHPF4860D6D*+TXV	D*96VE1205DNA*	56,000	38,500	14.0	11.5	1,525	7367126
	CHPF4860D6D*+TXV	D*97MC1205DNA*	56,000	38,500	14.0	11.5	1,545	7360152
	CHPF4860D6D*+TXV	D*80VC1005C*A*	56,500	38,500	14.0	11.5	1,520	6526165
	CHPF4860D6D*+TXV	D*96VC1205DNA*	56,000	38,500	14.0	11.5	1,545	7360150
	CHPF4860D6D*+TXV	D*80HE1005C*A*	56,000	38,500	14.0	11.5	1,525	6526155
	CHPF4860D6D*+TXV	D*80VC0805C*A*	56,000	38,500	14.0	11.5	1,520	6526160
	CHPF4860D6D*+TXV	D*96VC1005CNA*	56,000	38,500	13.5	11.0	1,520	7360149
	CSCF4860N6D*+EEP		55,000	37,600	13.0	11.0	1,500	6526072
	CSCF4860N6D*+MBVC2000**-1A*		56,000	38,500	13.5	11.5	1,575	6526074
	CSCF4860N6D*+MBVC2000**-1A*+TXV		56,000	38,500	14.0	11.5	1,575	6526076
	CSCF4860N6D*+TXV	D*80VC0805C*A*	56,500	38,500	13.5	11.5	1,520	6526161
	CSCF4860N6D*+TXV	D*96VC1205DNA*	55,500	38,000	13.5	11.0	1,545	7360154
	CSCF4860N6D*+TXV	D*80HE0805C*A*	54,500	37,400	13.0	11.0	1,550	6526151
	CSCF4860N6D*+TXV	D*97MC1005CNA*	55,500	38,000	13.5	11.0	1,520	7360155
	CSCF4860N6D*+TXV	D*97MC1205DNA*	55,500	38,000	13.5	11.0	1,545	7360156
	CSCF4860N6D*+TXV	D*80HE1005C*A*	55,500	38,000	13.5	11.0	1,525	6526156
	CSCF4860N6D*+TXV	D*80VC1005C*A*	55,500	38,000	13.5	11.0	1,520	6526166
	CSCF4860N6D*+TXV	D*96VC1005CNA*	55,500	38,000	13.5	11.0	1,520	7360153
	DV59PTCD14A*		56,000	38,500	13.5	11.5	1,660	8996412
DV60PTCD14A*		56,000	38,500	14.0	11.5	1,620	6526047	
DV61PTCD14A*		57,000	39,000	14.0	11.5	1,775	8996413	


¹ BTU/h

² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Daikin Gas Furnace contains the EEP cooling time delay.
- HSK - Hard Start Kit: This is an additional capacitor to assist with compressor start-up, used with the standard "run" capacitor that is supplied in the unit. Order from a Daikin distributor or service department.

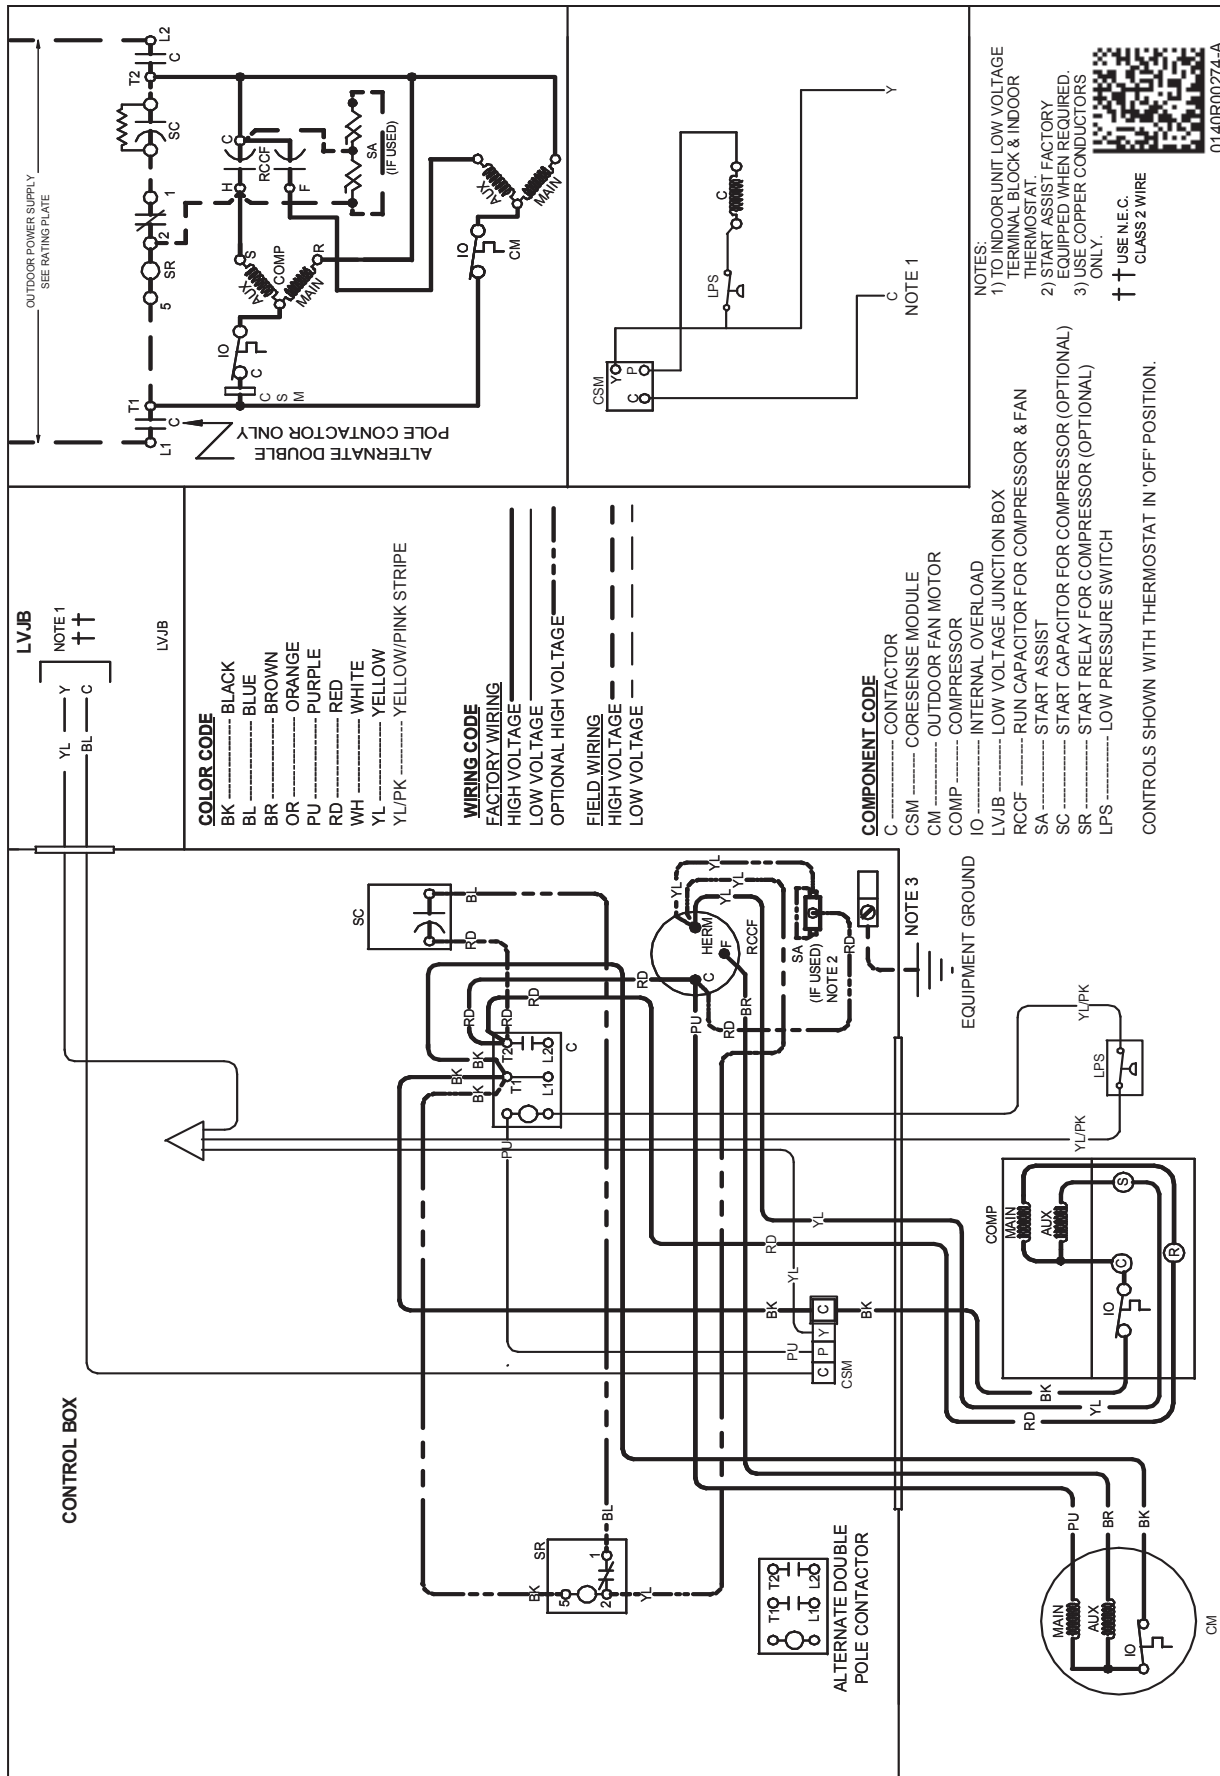

COLOR CODE

BK BLACK
 BL BLUE
 BR BROWN
 OR ORANGE
 PU PURPLE
 RD RED
 WH WHITE
 YL YELLOW
 YL/PK YELLOW/PINK STRIPE

WIRING CODE

FACTORY WIRING

HIGH VOLTAGE -----
 LOW VOLTAGE -----
 OPTIONAL HIGH VOLTAGE -----

FIELD WIRING

HIGH VOLTAGE -----
 LOW VOLTAGE -----

COMPONENT CODE

C CONTACTOR
 CSM CORESENSE MODULE
 CM OUTDOOR FAN MOTOR
 COMP COMPRESSOR
 IO INTERNAL OVERLOAD
 LVJB LOW VOLTAGE JUNCTION BOX
 RCCF RUN CAPACITOR FOR COMPRESSOR & FAN
 SA START ASSIST
 SC START CAPACITOR FOR COMPRESSOR (OPTIONAL)
 SR START RELAY FOR COMPRESSOR (OPTIONAL)
 LPS LOW PRESSURE SWITCH

CONTROLS SHOWN WITH THERMOSTAT IN 'OFF' POSITION.

NOTES:

1) TO INDOOR UNIT LOW VOLTAGE TERMINAL BLOCK & INDOOR THERMOSTAT.
 2) START ASSIST FACTORY EQUIPPED WHEN REQUIRED.
 3) USE COPPER CONDUCTORS ONLY.
 †† USE N.E.C. CLASS 2 WIRE



0140R00274-A

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

MODEL	DIMENSIONS		
	W"	D"	H"
DX13SA0181A*	26	26	27½
DX13SA0241A*	26	26	27½
DX13SA0301A*	26	26	27½
DX13SA0361A*	26	26	27½
DX13SA0421A*	29	29	36¼
DX13SA0481A*	29	29	36¼
DX13SA0601A*	29	29	40
DX13SA0611A*	35½	35½	38¼

THE GOODMAN MANUFACTURING COMPANY, L.P.
DX13SA

DRIVING TO BE INTERPRETED IN ACCORDANCE WITH ASHRAE 90.1-2010
CHANGES ARE IN RED
UNLESS OTHERWISE NOTED

COMPONENTS AND MATERIALS SPECIFIED HEREIN WILL ALSO CONFORM TO THE APPLICABLE SECTION OF GOODMAN MSP 624-DI WORKMANSHIP STANDARD FOR FIT, FEEL AND FINISH.
CONFIDENTIAL PROPERTY OF THE GOODMAN MANUFACTURING COMPANY, L.P. NOT TO BE DISCLOSED TO OTHERS, COPIED, OR USED FOR ANY PURPOSE EXCEPT AS AUTHORIZED IN WRITING. MUST BE RETURNED UPON DEMAND, ON COMPLETION OF ORDER, OR OTHER PURPOSE FOR WHICH IT WAS LOANED.

ACCESSORIES

MODEL	DESCRIPTION	DX13SA 018**	DX13SA 024**	DX13SA 030**	DX13SA 036**	DX13SA 042**	DX13SA 048**	DX13SA 060**	DX13SA 0611**
ABK-20	Anchor Bracket Kit ⁰	X	X	X	X	X	X	X	X
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X	X	X	X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X	X
LSK01A	Liquid Line Solenoid Kit	X	X	X	X	X	X	X	X
OT18-60A	Outdoor Thermostat	X	X	X	X	X	X	X	X
TX2N4 ²	TXV Kit	X							
TX2N4A ²	TXV Kit	X	X						
TX3N4 ²	TXV Kit			X	X				
TX5N4 ²	TXV Kit					X	X	X	X

⁰ Contains 20 brackets; four brackets needed to anchor unit to pad
¹ Installed on indoor coil
² Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.