

Lavatory Faucets

4" (102mm) Centerset with Offset Open Grid Strainer (No pop-up hole)

Model No: 22C541

COMPLIES WITH:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- Complies to ASME A112.18.6 for Flex Connector Models
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations
- Outlet options 2, 3, 4 and 7 are EPA WaterSense listed
- (Contact Delta Representative for State and/or Local Approvals)







NOTES:

CA/VT Compliance:

This COMPLETE SERIES is ONLY available as CA/VT Compliant product as of June 8, 2009.

The Product Numbers have NOT changed.

(Dimensional drawing on following page)

SPECIFICATION:


- Colour coded plug button on handle for hot/cold identification
- Chrome Finish
- Outlet#: 4 Standard 1.5 GPM (5.7 L/Min) Flow Control Aerator
- Handle#: 1 Vandal Resistant 89mm(3 1/2") lever handle ADA compliantcolour indexed

OPERATION:

Not Available

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 07, 2015.



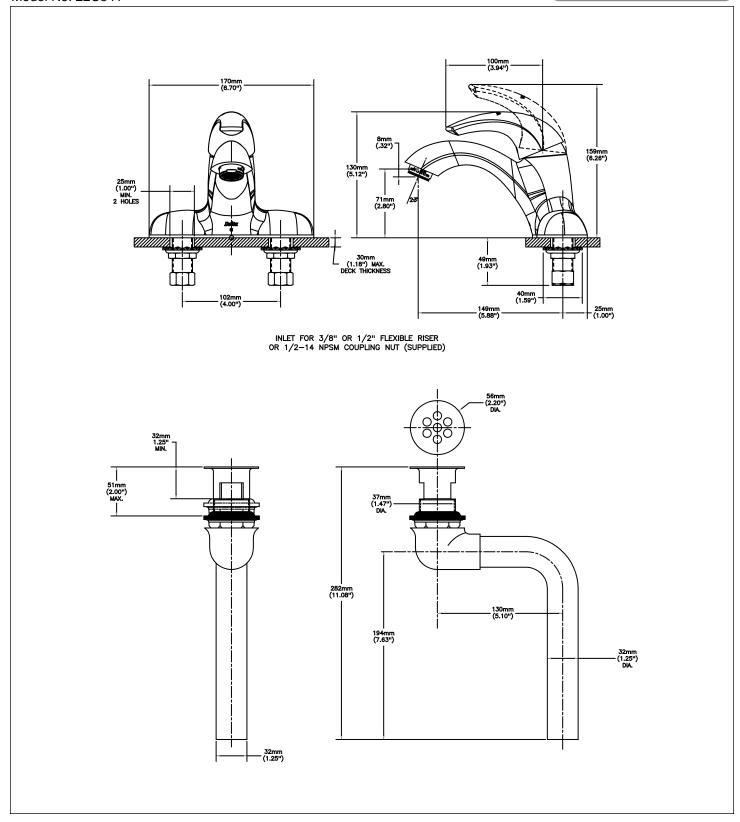

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced September 07, 2015.