



WALL BAR HAND HELD SHOWER

■ 5-Spray Setting Wall Bar Hand Shower

FEATURES:

- Touch-Clean® Nozzles

STANDARD SPECIFICATIONS:

- Maximum flow rate 2.0 gpm @ 80 psi, 7.6 L/min @ 552kPa
- Hand held shower with five spray patterns – not a positive shut-off
- Wall bar w/adjustable slide (allows for adjustable shower height). Not to be used as a grab bar.
- 70" (1778mm) Ultra Flex hose for 51599
- 60"- 82" (1524mm-2083mm) metal stretchable hose w/ vacuum breaker for 51599-DS



WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.3
- EPA WaterSense®

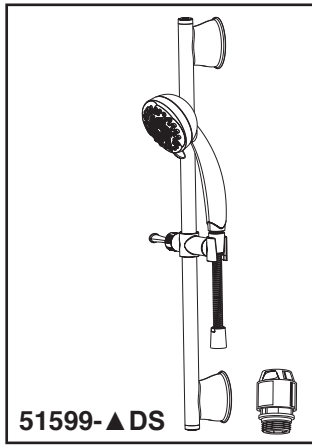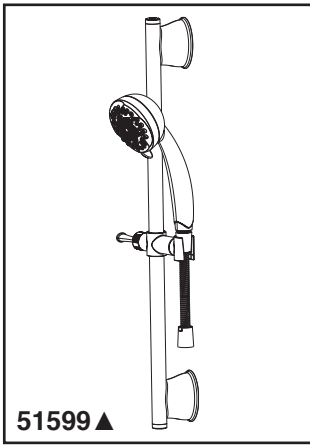

Submitted Model No.: _____

Specific Features: _____

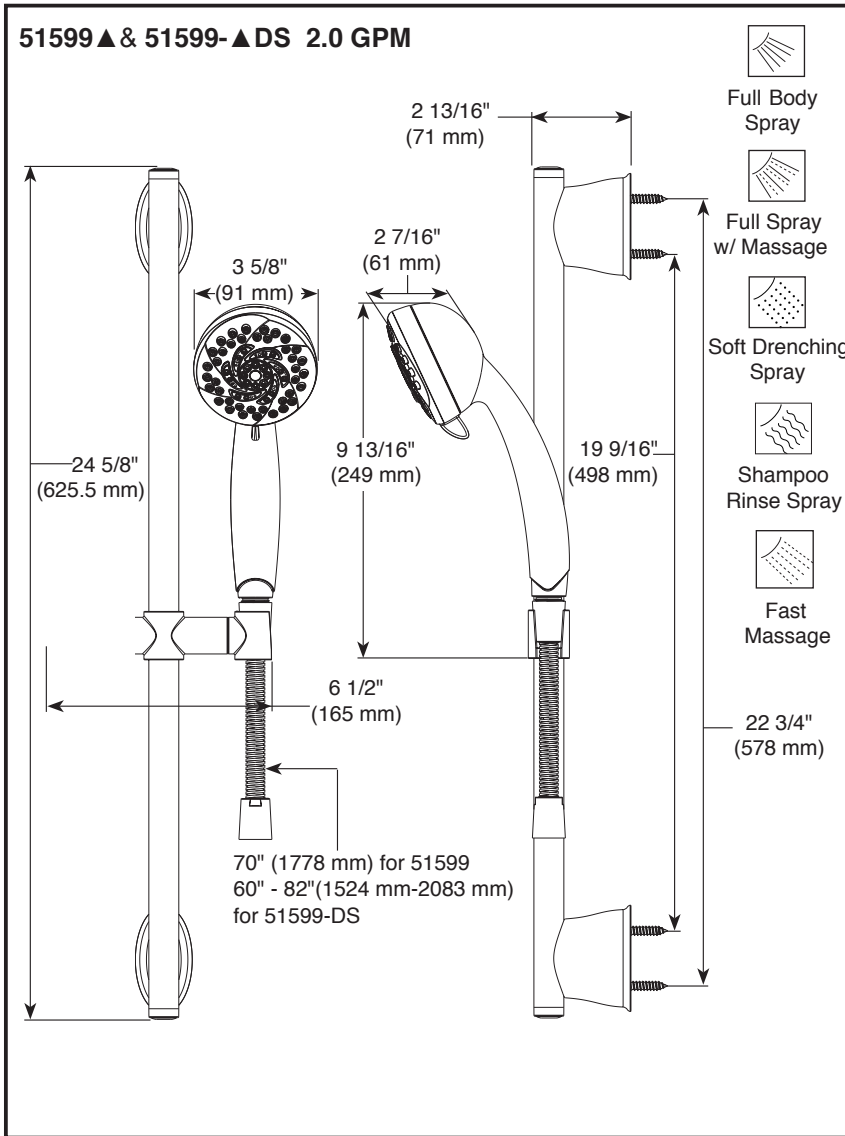

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-51599 Rev. B



55 E. 111th Street, Indianapolis, Indiana 46280
 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
 © 2016 Masco Corporation of Indiana