


Submitted Model No.:

Specific Features:



▲ Designate Proper Finish Suffix

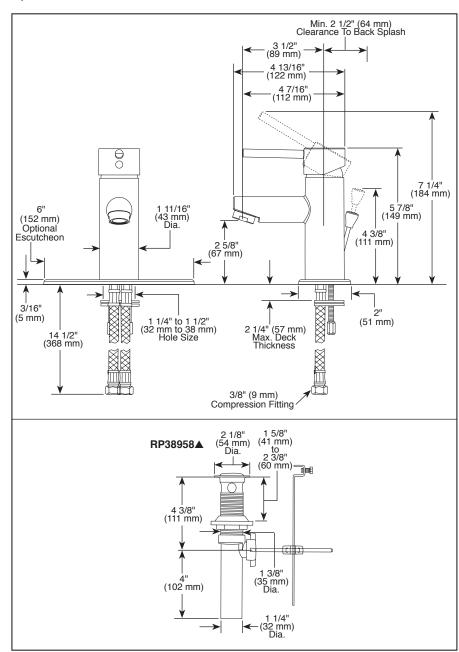

LAVATORY FAUCETS

- Contemporary Round
- Single Handle Deck Mount
- 1 or 3 Hole Mount (Optional 6" Escutcheon Sold Separately)

STANDARD SPECIFICATIONS:

- Single handle lavatory deck faucet.
- 1 or 3 hole mount (6" escutcheon plate sold separately for 3 hole installation (RP78359)).
- Solid brass body.
- Lift rod hole plug included.
- 3 1/2" (89 mm) long spout.
- Metal lever handle.
- Control mechanism is the ceramic disc cartridge with temperature limiter.
- Red/blue markings on handle for hot/cold identification.
- Control handle shall return to neutral position when valve is turned off.
- Maximum 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa.
- GPM indicates max. 1.0 gpm @ 60 PSI, 3.8 L/min @ 414 kPa.
- HGM indicates max. 0.5 qpm @ 60 PSI, 1.9 L/min @ 414 kPa.
- 1/4" threaded stud mounting.
- 3/8" compression fittings with flexible supply hoses 14 1/2" (368 mm) long.
- 2 1/4" (57 mm) maximum deck thickness.
- Models have 50/50 pop-up type fitting with plated flange and stopper.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- *■ EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.

