


# LAVATORY FAUCETS

- Compel® Collection
- Single Handle Deck Mount
- 1 or 3 Hole Sink Mount  
(Optional 6" Escutcheon Included)

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

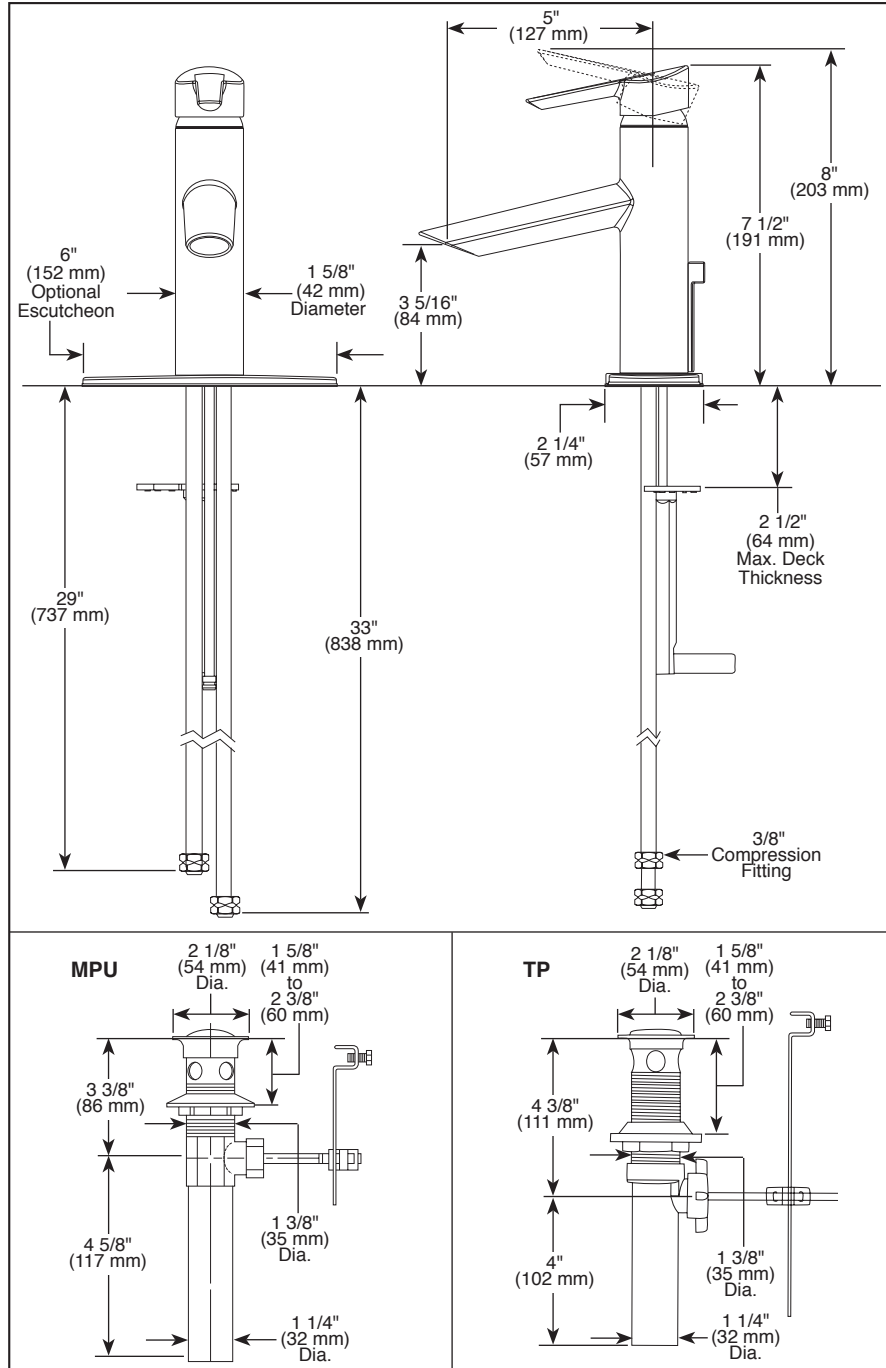

## STANDARD SPECIFICATIONS:

- Lever handle. Control mechanism is the diamond embedded ceramic disc cartridge.
- 1 or 3 hole installation.
- 5" (127 mm) long reach on spout.
- Red/blue markings on handle for hot/cold identification.
- Control handle shall return to neutral position when valve is turned off.
- 3/8" O.D. straight, staggered pex supply tubes 29" (737 mm) and 33" (838 mm) long.
- Maximum flow rate 1.5 gpm @ 60 PSI.
- Models with suffix "MPU" have metal drain with pop-up type fitting with plated flange and stopper.
- Models with suffix "LPU" are less pop-up.
- Models with suffix "TP" have 50/50 pop-up type fitting with plated flange and stopper.
- HGM indicates .5 gpm @ 60 PSI.


## WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



## COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense® - excludes HGM model
- Verified compliant with .25% weighted average Pb content regulations.

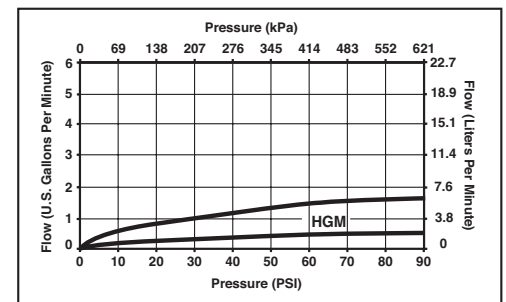

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-L-561-MPU-DST Rev. B



55 E. 111th Street, Indianapolis, Indiana 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2014 Masco Corporation of Indiana