



Submitted Model No.:

# **Specific Features:**

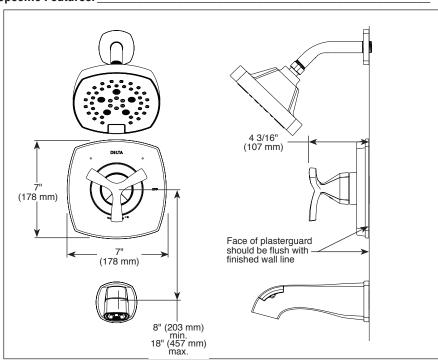

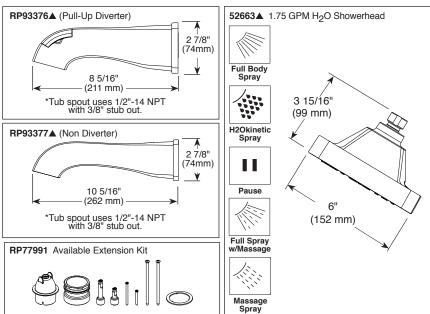

▲ Designate Proper Finish Suffix



see what Delta can do

# TUB AND SHOWER **FAUCET TRIM**

- Stryke<sup>™</sup> Bath Collection
- Valve Only (T140766)
- Shower Only (T142766)
- Tub/Shower (T144766)

#### **FEATURES:**

- Monitor® 14 Series pressure balanced bath single handle mixing valve trim
- Five-setting H<sub>2</sub>Okinetic® Technology showerhead

### **STANDARD SPECIFICATIONS:**

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system.
- For use with MultiChoice® Universal rough valve body. (R10000 Series)
- Back-to-back installation capability.
- Temperature only controlled with handle.
- Field adjustable to limit handle rotation into hot water zone.
- 120° maximum handle rotation.
- All parts replaceable from the front of the valve.
- Max. 1.75 gpm @ 80 psi, 7.60 L/min @ 550 kPa.
- Red/blue pad print temperature indicator on the shower escutcheon.
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness. RP77991 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.

#### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



# **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1

Indicates compliance to ICC/ANSI A117.1-Valve control only.

■ EPA WaterSense®