

# SER 3204D

## Energy Recovery Ventilator

Product #: 40226



Suitable for very large residential or small commercial applications, the compact SER 3204D comes with access panels on both sides of the unit for installation versatility. The SER 3204D unit brings a continuous supply of fresh air into a home while exhausting an equal amount of contaminated air. The enthalpic core at the center of the unit transfers heat and moisture from the incoming air to the outgoing air that was cooled and dried by the building's air conditioner.

### Features

- Simple yet sophisticated design makes these units the most reliable ERV on the market
- Enthalpy core
- Fans with backward curved RadiCAL blade
- No balancing required
- Weighs 80 lbs (38Kg)

### Optional Controls

- ECO-Touch™ (#44929) – Programmable Touch Screen Wall Control
- EDF7 (#44883) – Electronic multi-function dehumidistat
- EDF1 (#40375) – Multi-function control
- RTS3 (#40376) – 20/40/60 minute over-ride
- RTS2 (#40164) – 20 minute over-ride
- MDEH1 (#40172) – Dehumidistat

### Specifications

- Duct size – 8" (203 mm)
- Voltage/Phase – 120/1
- Power rated – 300 W@ High speed
- Amp – 2.5 A
- Average airflow – 208 cfm (98 L/s)  
@ 0.4" P<sub>s</sub> (100Pa)

### Fans

Two (2) factory-balanced fans with backward curved blades. Motors come with permanently lubricated, sealed ball-bearings to guarantee long life and maintenance-free operation.

### Energy Recovery Core

Two (2) AHRI certified core made from water vapor transport durable polymer membrane that is highly permeable to humidity. The ERV core is freeze tolerant and water washable. Core dimensions are 12" x 12" (305 x 305 mm) with a 12" (305 mm) depth.

### Defrost

A preset defrost sequence is activated at an outdoor air temperature of 23°F (-5°C) and lower. During the defrost sequence, the supply blower shuts down & the exhaust blower switches into high speed to maximize the effectiveness of the defrost strategy. The unit then returns to normal operation, and continues cycle.

### Serviceability

Core, filters, fans, drain pan and electrical panel can be accessed easily from the access panel. Core conveniently slides out with only 14" (356 mm) clearance.

### Case

20 gauge galvanized steel. Baked powder coated paint.

### Insulation

Cabinet is fully insulated with 1" (25 mm) high density expanded polystyrene.

### Filters

Four (4) washable electrostatic panel type air filters 11.75" (292mm) x 15" (380mm) x 0.125" (3mm).

### Controls

External three (3) position (Low/Stand By/Medium) rocker switch that will offer continuous ventilation. In addition Fantech offers a variety of external controls. External dry contacts provided.


### Warranty

5 years on energy recovery core, 7 year on motors, and 5 year on parts.



**fantech**®  
a systemair company

## Dimensions & Airflow

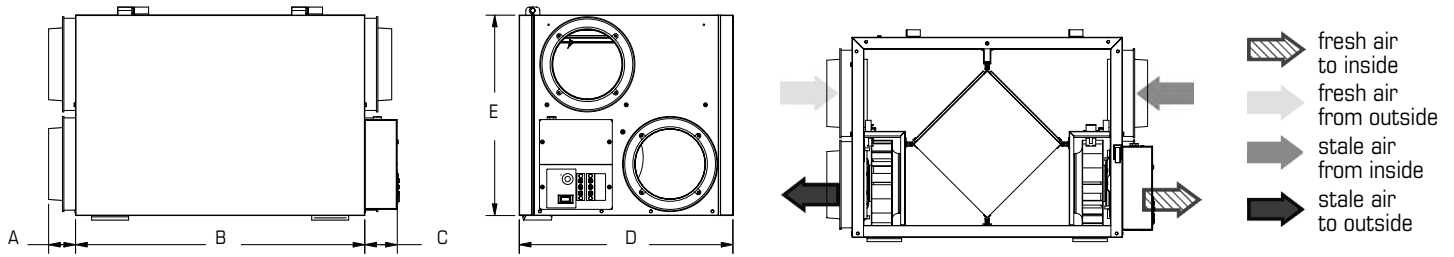


Model	A		B		C		D		E	
	in	mm	in	mm	in	mm	in	mm	in	mm
SER3204D	2 1/4	57	27 7/8	708	2 5/8	67	25 1/2	648	20 1/2	521

Clearance of 17" (432 mm) in front of the unit is recommended for removal of core. All units feature three foot plug-in power cord with 3-prong plug.

## Ventilation Performance

in. wg. (Pa)	0.2 (50)	0.4 (100)	0.6 (150)	0.8 (200)	1.0 (250)
	cfm (L/s)	cfm (L/s)	cfm (L/s)	cfm (L/s)	cfm (L/s)
Net supply airflow	249 (118)	202 (95)	157 (74)	113 (53)	71 (34)
Gross supply airflow	256 (121)	208 (98)	162 (76)	117 (55)	73 (34)
Gross exhaust airflow	259 (122)	217(102)	177 (84)	138 (65)	100 (47)

These measurements are for HIGH speed only

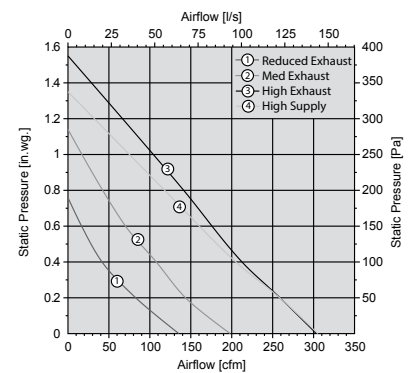

## Energy performance

	Speed	Supply temperature		Net airflow		Consumed Power	Net effectiveness		
		°F	°C	cfm	L/s		W	Sensible	Latent
						%		%	%
Heating	Low	35	1.7	100	47	182	76	63	71
	Medium	35	1.7	150	71	255	74	59	69
	High	35	1.7	200	94	311	70	52	63
Cooling	Low	95	35	100	47	182	76	59	65
	Medium	95	35	150	71	255	74	55	63
	High	95	35	200	94	311	70	48	56

## Requirements and standards

- Complies with the UL 1812 requirements regulating the construction and installation of Heat Recovery Ventilators
- Complies with the CSA C22.2 no. 113 Standard applicable to ventilators
- Complies with the CSA F326 requirements regulating the installation of Heat Recovery Ventilators
- Technical data was obtained from published results of test relating to CSA C439 Standards
- Energy Recovery Core is ISO 846 certified for mold and bacteria resistance and AHRI certified (certificate #8931528)
- Technical data was obtained from published results of test relating to AHRI 1060 Standards

## Contacts

Submitted by:	Date:
Quantity: Model:	Project #:
Comments:	
Location:	
Architect:	
Engineer:	Contractor:

## Distributed by:

United States 10048 Industrial Blvd. • Lenexa, KS 66215 • 1.800.747.1762 • www.fantech.net

Canada 50 Kanalfakt Way • Bouctouche, NB E4S 3M5 • 1.800.565.3548 • www.fantech.net

Fantech, reserves the right to modify, at any time and without notice, any or all of its products' features, designs, components and specifications to maintain their technological leadership position.



**fantech**<sup>®</sup>  
a systemair company