

Features

- Brass construction.
- One-piece, self-contained ceramic disc joystick valve actuation allows both volume and temperature control.
- Single-hole mounting.
- Single-handle.
- ADA compliant lever handle.
- Flexible connections for easy installation.
- 6-3/8" (162 mm) spout reach.
- Stationary spout.
- Touch-activated drain with tailpiece and overflow.
- Lower flow aerator options are available (refer to the Kohler Price Book).
- 2.2 gal/min (8.3 l/min) maximum flow rate.




Codes/Standards

ASME A112.18.1/CSA B125.1
NSF 61
NSF 372
DOE - Energy Policy Act 1992
All applicable US Federal and State material regulations

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

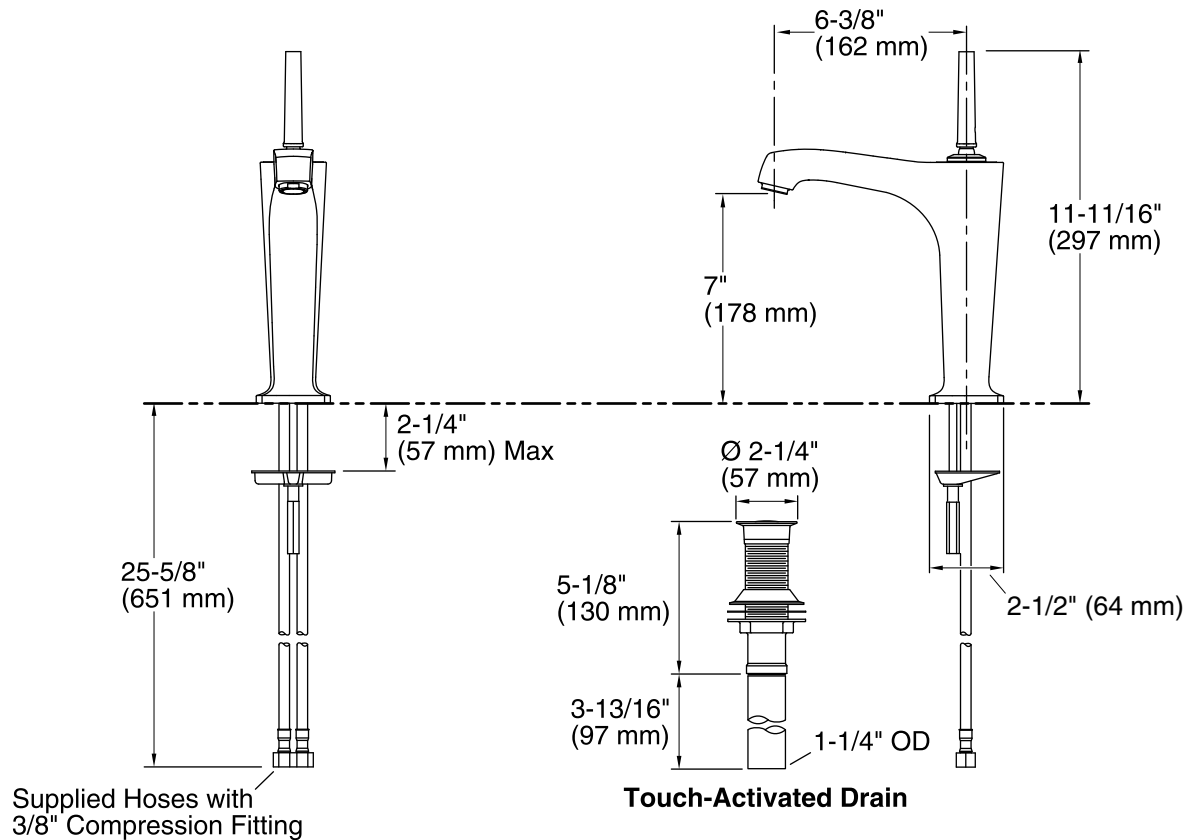

Technical Information

All product dimensions are nominal.

Spout reach: 5-3/8" (137 mm)

Drain included: YES

Drain with overflow: YES

Drain tailpiece included: YES

Faucet:

Flow rate: 2.2 gal/min (8.3 l/min)

Notes

Install this product according to the installation guide.