

## **Sunstruck®**

# Freestanding BubbleMassage™ Air Bath K-1967-GW

#### **Features**

- Freestanding design creates a striking focal point in your bathing area.
- 16" soaking depth.
- Center drain.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck.
- Integral lumbar support.
- Textured bottom surface.
- Wide ledge on one side is ideal for deck-mount faucet and/or handshower.

#### Material

Acrylic

### **Hydrotherapy**

- 118-122 BubbleMassage™ airjets
- Variable-speed blower for adjusting hydromassage intensity

#### Installation

- Freestanding
- PureFlo drains are not recommended for a deck-mount faucet installation

#### **Recommended Accessories**

K-7265 Clearflo Bath Drain K-37383 30" Rough-in Cable Bath Drain K-37386 30" Rough-in Cable Bath Drain K-24916 Wireless Music Kit





#### Codes/Standards

ASME A112.19.7/CSA B45.10 CSA B45.5/IAPMO Z124 UL 1795 Greenguard UL 2818 - Gold

KOHLER® Plastic Baths and Receptors Limited Lifetime Warranty KOHLER® Hydrotherapy Components Limited Five-Year Warranty See website for detailed warranty information.

#### Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit







## **Sunstruck®**

# Freestanding BubbleMassage™ Air Bath K-1967-GW


No change in measurements if connected with drain illustrated. (K-37383)

Recommended Faucet Location

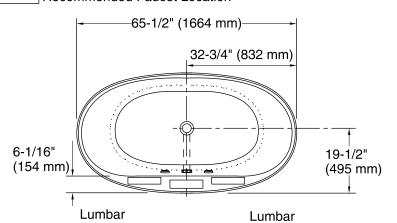



**Recommended Faucet Hole Location** 

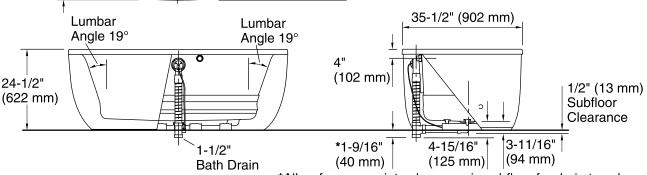

\*Allow for appropriate clearance in subfloor for drain tee clearance. **Note:** Horizontal PVC pipe and tee shown, not included.

### **Required Electrical Service**

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower, Heated 120 V, 15 A, 60 Hz

Surface:

#### **Technical Information**

All product dimensions are nominal. Installation: Freestanding

Drain location: Center

Basin area, bottom: 45-3/4" x 24-7/8" (1162 mm x 632 mm)
Basin area, top: 54-7/8" x 29-3/16" (1394 mm x 741 mm)

Weight: 91 lbs (41.3 kg)

Minimum floor load: 40.4 lbs/ft<sup>2</sup> (197.3 kg/m<sup>2</sup>)

Water depth: 16" (406 mm)
Water capacity: 72.6 gal (274.8 L)

Template: Footprint, 1244408-7, not required, not

included

Electrical component Blower: 120 V, 10 A, 60 Hz

rating: Heated Surface: 120 V, 0.5 A, 60 Hz, 65

W

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Remote blower motor installation is required. Relocation kit is included.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

