



Frameless Sliding Shower Door K-707100-D3

Features

- Contemporary towel bar outside and knob inside complete the look of this door.
- Frameless, 1/4" (6 mm) thick Frosted tempered glass door.
- Can be installed to open to the left or right.
- Frameless design enphasizes glass and creates a sleek, minimalist look.
- CleanCoat® technology creates a barrier between the water and glass to help keep your shower door looking new.
- Smooth, easy-to-clean wall jambs.
- Center-guided mechanism for smooth, quiet sliding action and easy cleaning.

Material


Anodized aluminum hardware prevents rusting or corrosion.

Installation

- Out-of-plumb adjustability allows for simpler installation.
- •

Components

Additional included component/s: Hardware Kit.



Codes/Standards

ASTM C1036 ASTM C1048 ANSI Z97.1 (Tempered Glass) CPSC 16CFR 1201

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	SHP	Bright Polished Silver
	ABZ	Anodized Dark Bronze
	BNK	Anodized Brushed Nickel

Available Glass Options
Code Description


Frosted







Frameless Sliding Shower Door K-707100-D3

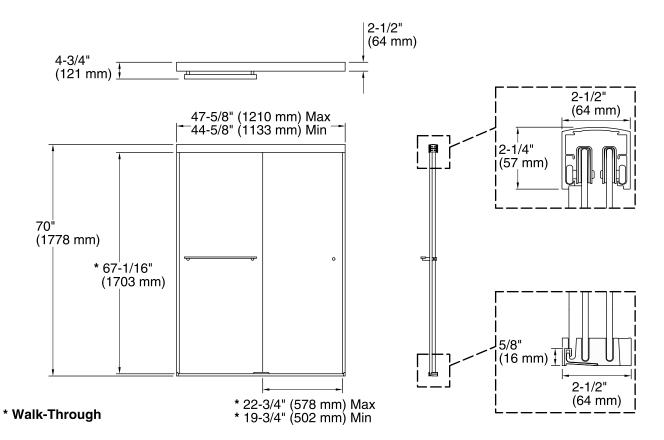

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Sliding/Bypass
Opening Width - Min: 44-5/8" (1133 mm)
Opening Width - Max: 47-5/8" (1210 mm)
Walk-through - Min: 19-3/4" (502 mm)
Walk-through - Max: 22-3/4" (578 mm)
Glass thickness: 1/4" (6 mm)
Glass coating: CleanCoat®

Notes

Install this product according to the installation guide.

Wall jambs are made of clear plastic and may not cover existing shower door holes.

NOTICE: The vertical opening should be a minimum of 72-1/2" (1842 mm) to allow clearance for installing the top track over the wall jambs.

