

Features

- Single-function showerhead with 66-nozzle 5-1/2" (140 mm) diameter sprayface.
- Katalyst™ Spray Technology with air induction ball joint.
- Optimized sprayface for maximum performance.
- MasterClean™ spray nozzles prohibit mineral buildup for easy cleaning.
- 2.5 gal/min (9.5 l/min) flow rate.

Installation

- 1/2"-14 NPT connection.

Recommended Accessories

K-72775 Shower Arm and Flange



Codes/Standards

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|--------------------------|
|  | CP | Polished Chrome |
|  | SN | Vibrant® Polished Nickel |
|  | BN | Vibrant® Brushed Nickel |
|  | BV | Vibrant® Brushed Bronze |
|  | 2BZ | Oil-Rubbed Bronze |
|  | VNT | Vintage Nickel |

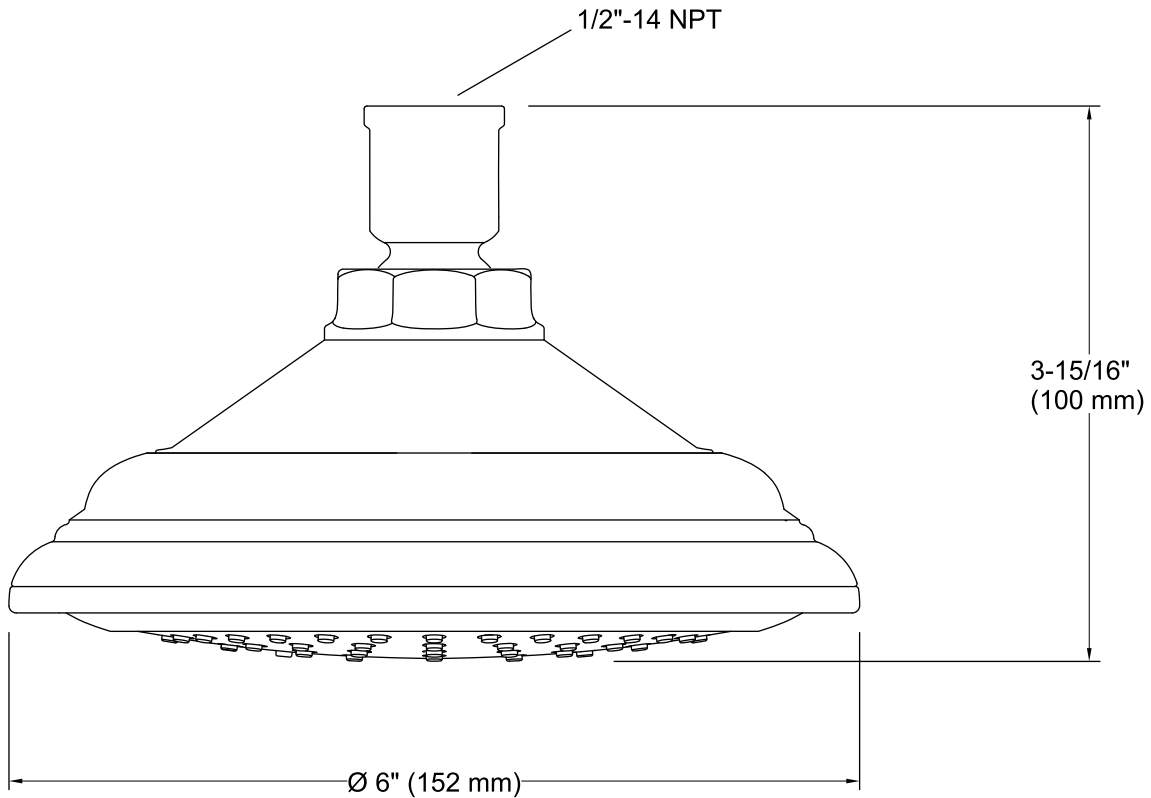

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min)

Notes

Install this product according to the installation guide.