

Features

- Metal construction.
- ADA Compliant Lever handle .
- Leak free ceramic disc valve allows both volume and temperature control.
- Temperature memory allows faucet to be turned on and off at any temperature setting.
- High-temperature limit setting for added safety.
- Single-hole mounting.
- Durable KOHLER finishes resist corrosion and tarnishing.
- Complete range of faucets, accessories and showering components to coordinate a full bathroom.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.1 bar)]
- Not compatible with lavatories with centerset drillings.





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF 61 NSF 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

CP Polished Chrome

TT Vibrant Titanium




Composed[™]

Single-handle Sink Faucet K-73167-4

Composed™

Single-handle Sink Faucet K-73167-4

KOHLER, Faucets

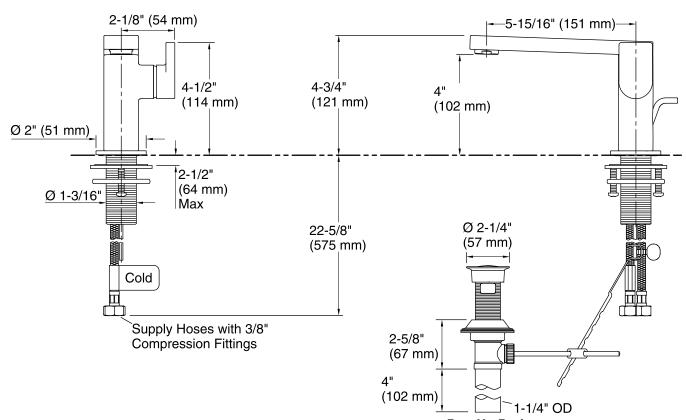

Pop-Up Drain

Technical Information

| All product dimensions | s are nominal. |
|------------------------|----------------|
| Valve body: | Cast Brass |
| Drain with overflow: | YES |
| Drain tailpiece | YES |
| included: | |

Spout:

| Spout reach: | 5-15/16" (151 mm) |
|-------------------|-------------------|
| Handle clearance: | 1-9/16" (40 mm) |

Faucet:

| Flow rate: | 1.2 gal/min (4.5 l/min) |
|------------|-------------------------|
| Pressure: | 60 psi (4.1 bar) |

Notes

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.

