

# **Artifacts®**

# Deck-Mount Bridge Kitchen Sink Faucet K-76519-3M

#### **Features**

- Matching two-function sidespray featuring Sweep® Spray and BerrySoft® provides convenience for cleaning and food prep.
- Sweep® spray creates a wide, forceful blade of water for superior cleaning.
- BerrySoft® is a light spray that gently washes fruits and vegetables.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- ProMotion® technology's light, quiet braided hose and swiveling ball joint make the sidespray easier and more comfortable to use
- MasterClean<sup>™</sup> sprayface features an easy-to-clean surface that withstands mineral buildup.
- Tall swing spout and 360-degree spout rotations offer superior clearance for filling pots and cleaning.
- Two six-prong handles offer separate control of hot and cold water.
- 1.5 gpm (gallons per minute) maximum flow rate at 60 psi.

#### Material

- Premium metal construction.
- KOHLER finishes resist corrosion and tarnishing.
- Sidespray is color-matched to the faucet finish.

## Installation

Three-hole or four-hole installation.



ADA

#### Codes/Standards

ASME A112.18.1/CSA B125.1

**NSF 61** 

NSF 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

See website for detailed warranty information.

### **Available Color/Finishes**

Color tiles intended for reference only.


| Color | Code | Description              |
|-------|------|--------------------------|
|       | CP   | Polished Chrome          |
|       | SN   | Vibrant® Polished Nickel |
|       | VS   | Vibrant® Stainless       |
|       | 2BZ  | Oil-Rubbed Bronze        |





# **Artifacts®**

# Deck-Mount Bridge Kitchen Sink Faucet K-76519-3M

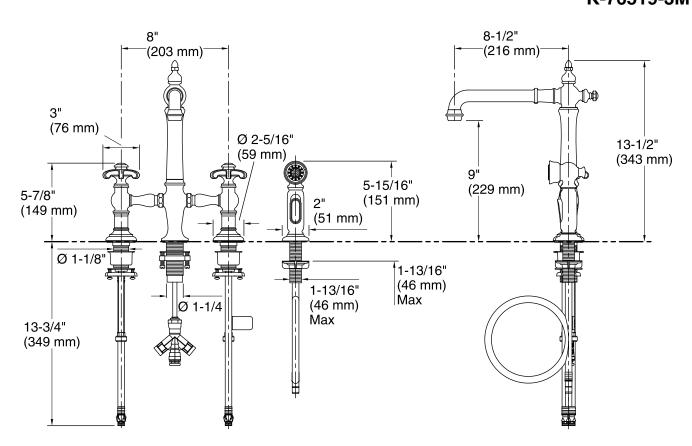

### **Technical Information**

All product dimensions are nominal.

Valve body: Plastic

Spout:

Spout reach: 8-1/2" (216 mm)
Handle clearance: 1-1/2" (38 mm)

Faucet:

Flow rate: 1.5 gal/min (5.7 l/min)

Pressure: 60 psi (4.1 bar)

Sidespray:

Flow rate: 1.8 gal/min (6.8 l/min)

Pressure: 60 psi (4.1 bar)

#### **Notes**

Install this product according to the installation guide.

ADA compliant when installed to the specific requirements of these regulations.

