

# **Rely**® 48"x34" Shower Base **K-8461**

# GREENGUARD FROGUCT CERTILIO FOR LOW COMBINAL EMISSIONS ULCOM/CG U. 2339

### **Features**

- Low-threshold design for easy entry and exit.
- Molded-in textured floor.
- Water containment bead incorporated into the threshold design provides an optimum barrier, eliminating water escaping from the shower space.
- Single threshold for alcove installation.
- Durable acrylic construction.
- Center drain.
- Coordinates with Choreograph shower walls and other Kohler collections.

## **Recommended Products/Accessories**

K-9132 Shower Drain



### Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

# KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar





# Rely® 48"x34" Shower Base K-8461

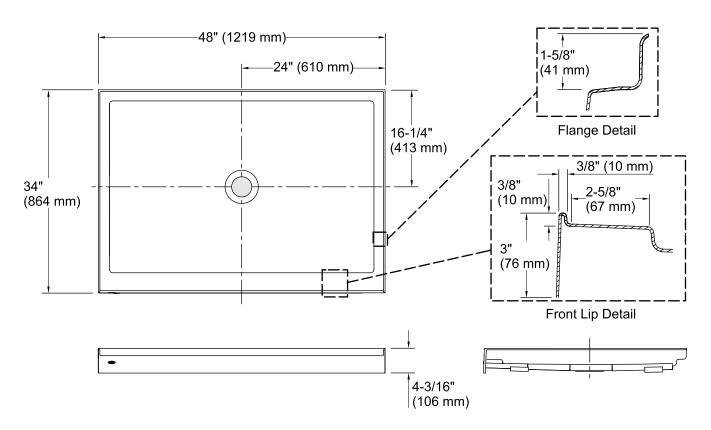

# **Technical Information**

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Center

Weight: 53 lbs (24 kg)

#### **Notes**

Measure your actual product for rough-in details. Install this product according to the installation instructions.

Subfloor must be within 1/2" (13 mm) of level. This receptor has a front lip. This should be taken into account when installing a shower door.

