



Features

- Low-threshold design for easy entry and exit.
- Covered drain with removable cover.
- Single threshold for alcove installation.
- Durable acrylic construction.
- Center drain.
- Coordinates with other products in the Archer collection.

Recommended Products/Accessories

K-9132 Shower Drain
K-702011-L Frameless Pivot Shower Door
K-702408-G54 Frameless Pivot Shower Door
K-702408-L Frameless Pivot Shower Door
K-705701-L Frameless Pivot Shower Door
K-705707-L Frameless Pivot Shower Door
K-705713-L Frameless Pivot Shower Door
K-705719-L Frameless Pivot Shower Door
K-705725-L Frameless Pivot Shower Door
K-705737-L Frameless Pivot Shower Door
K-705802-L Semi-Frameless Pivot Shower Door
K-705803-L Semi-Frameless Pivot Shower Door
K-705816-L Semi-Frameless Pivot Shower Door
K-705817-L Semi-Frameless Pivot Shower Door



Codes/Standards

ASME A112.19.1/CSA B45.2
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
Greenguard UL 2818 - Gold


KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	33	Mexican Sand™
	K4	Cashmere
	58	Thunder™ Grey
	7	Black Black™

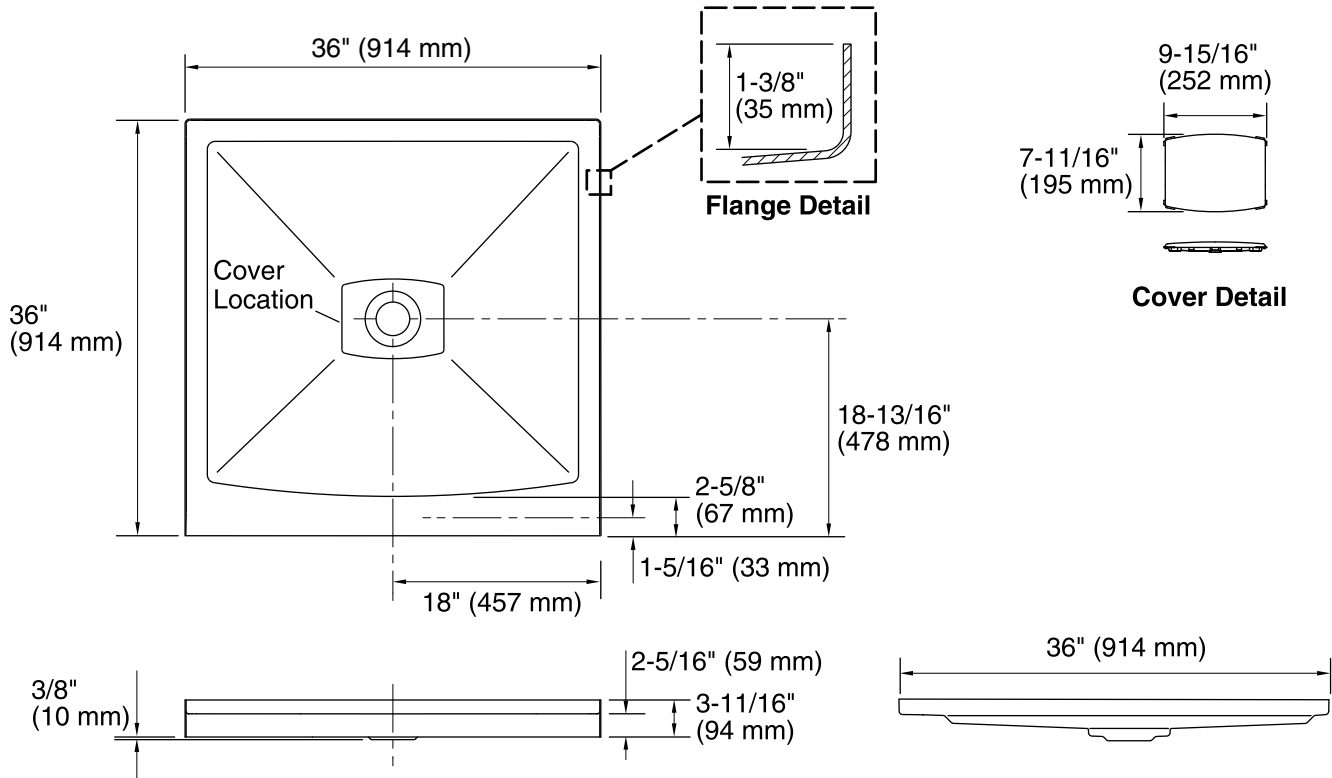

Technical Information

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Center
Weight:	33 lbs (15 kg)
Minimum floor load:	20 lbs/ft ² (97.6 kg/m ²)

Notes

- Measure your actual product for rough-in details.
- Install this product according to the installation instructions.
- Shimming may be required to level the fixture.
- Shimming may be required between the stud frame and the fixture.
- Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).