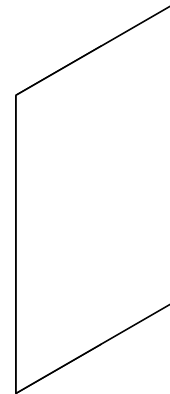## Material
- Made from Serica™ composite material.
- Durable, non-porous, 0.2" thick compression-molded wall that is easy to clean and resists chipping and cracking.

Installation
- Trimmable to customize size and installation.

Codes/Standards
ASTM E162
ASTM E662

KOHLER® Limited Warranty – Choreograph™ Walls and Accessories
See website for detailed warranty information.

Available Color/Finishes
Color tiles intended for reference only.

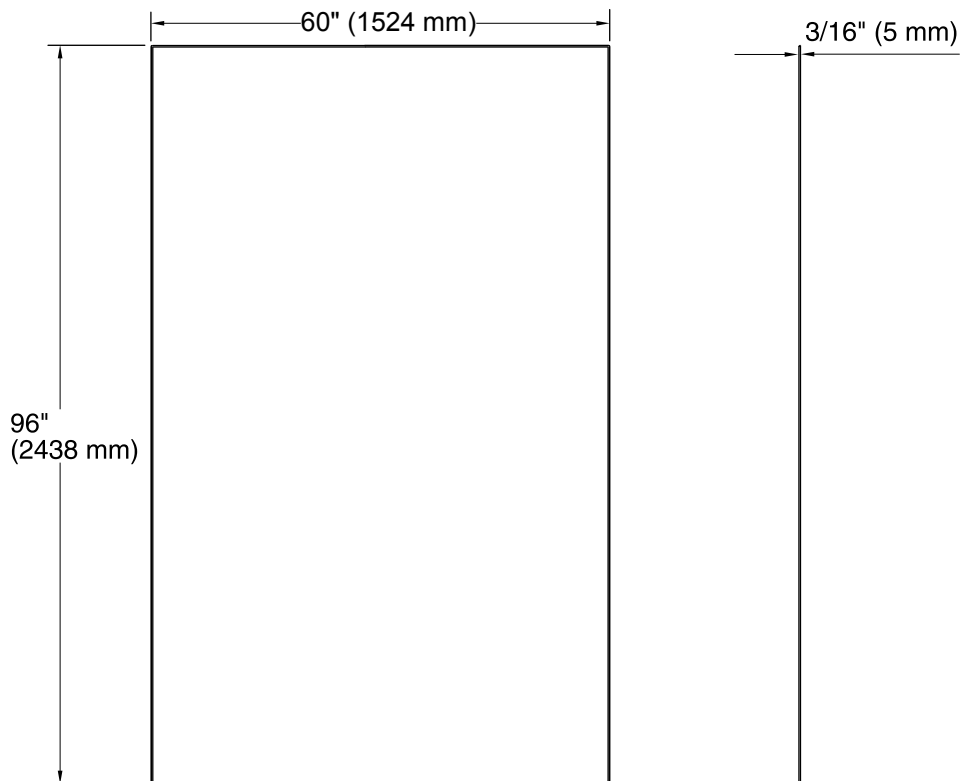| Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	W07	
	W08	
	W09	
	W10	
	W11	

60" (1524 mm)

3/16" (5 mm)

96"
(2438 mm)

Technical Information
All product dimensions are nominal.

Installation: Individual Wall

Notes
Install this product according to the installation guide.

Use non-solvent based construction adhesive. For installation over tile, use 100% silicone sealant.

Corner joints (optional) allow for 3/8" (10 mm) adjustment for out-of-plumb conditions or uneven cuts.

If installing accessories, install 2x4 backing for handrails, shelves, and shower hooks and 2x10 backing for the flip down seat.