

**GROOVETM** 

#### **Features**


- Acrylic
- For alcove installations
- One-piece construction
- Removable drain cover
- Drain hole at rear
- 60" (1524 mm) x 42" (1067 mm) x 4-9/16" (116 mm)

## **Codes/Standards Applicable**

Specified model meets or exceeds the following:

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662

ACRYLIC SHOWER BASE K-9996
ALSO K-9333, K-9337



### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### **Accessories**

- CP: Polished Chrome
- PB: Vibrant<sub>®</sub> Polished Brass
- SH: Bright Silver
- NA: None applicable
- Other: Refer to Price Book for additional colors/finishes

# **Specified Model**

Model	Description Colors/Fin		ishes	
K-9996	60" (1524 mm) shower base		□ 0	☐ Other
Required	Accessories		·	·
K-9333	Aluminum drain cover <b>OR</b>			□ SH
K-9337	Teak drain cover			□ NA
Recomme	ended Accessories			-
K-9132	Drain	□ CP	□ PB	☐ Other

# **Product Specification**

The acrylic shower base with removable drain cover shall be 60" (1524 mm) in length, 42" (1067 mm) in width, and 4-9/16" (116 mm) in height. Shower base shall be for alcove installations. Shower base shall be one-piece configuration with drain hole at rear. Shower base shall be Kohler Model K-9996-\_\_\_\_\_.

# **GROOVE**<sub>TM</sub>

### **Technical Information**

	Fixture*:	Fixture*:		
	Weight	72 lbs (32.7 kg)		
	Configuration	one-piece		
	Drain hole	Ø 3-3/8" (86 mm)		
	* Approximate measurements for comparison only.			

#### **Installation Notes**


Install this product according to the installation guide.

Shimming may be required to level the fixture.

Shimming may be required between the stud frame and the fixture.

The stud opening tolerance is +1/4" (6 mm), -0" (0 mm).

When fire rated construction is specified, dimensions are to the inside of the fire-rated wall.

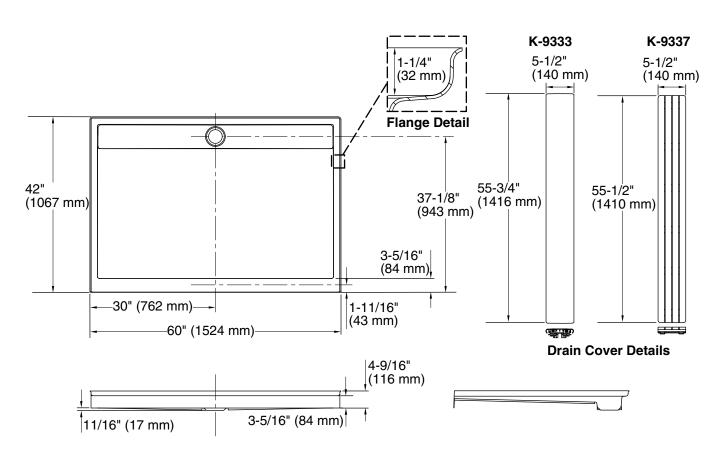

**Product Diagram** 

