

**Features**

- Metal construction
- 2.0 gallons (7.6 L) per minute flow rate
- Available with 4-7/8" (124 mm) diverter bath spout with slip-fit connection
- Includes showerhead with arm and flange [K-T98006, K-T98008, K-T98009]
- Includes faceplate and lever handle


**BATH & SHOWER TRIM SET  
K-T98006  
ALSO K-T98007, K-T98008**



**Codes/Standards Applicable**

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- ASSE 1016
- EPA WaterSense®

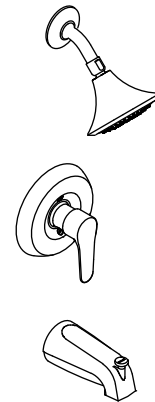

**Colors/Finishes**

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

**Accessories**

- NA: None applicable
- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes



**Specified Model**

Model	Description	Colors/Finishes	
K-T98006-4	Rite-Temp® bath & shower trim (shown)	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-T98007-4	Rite-Temp bath & shower trim, less showerhead	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-T98008-4	Rite-Temp shower trim	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-T98009-4	Rite-Temp shower trim, less showerhead – ADA compliant	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-T98147-4	Rite-Temp valve trim – ADA compliant	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____

**Product Specification**

The bath & shower trim set shall be made of metal construction. Product shall be 2.0 gallon (7.6 L) per minute flow rate. Product shall be available with 4-7/8" (124 mm) diverter bath spout with slip-fit connection. Product shall include showerhead with arm and flange [K-T98006, K-T98008, K-T98009]. Product shall include faceplate and lever handle. Faucet trim shall be Kohler Model K-\_\_\_\_\_-4-\_\_\_\_\_- and mixing valve shall be Kohler Model K-\_\_\_\_\_-\_\_\_\_\_-NA.

# JULY

Required Accessories			
K-304-*	Rite-Temp® valve <b>OR</b>	<input type="checkbox"/> NA	
K-2971-KS	HiFlow Rite-Temp valve with stops		<input type="checkbox"/> NA
* For a complete listing of all the Rite-Temp valves, refer to the K-304-* Specification Sheet or Roughing-In sheet.			
Optional Accessories			
88526	HiFlow Rite-Temp thin wall installation kit	<input type="checkbox"/> CP	<input type="checkbox"/> Other_____

## Installation Notes


Install this product according to the installation guide.

**NOTICE: Risk of product damage.** Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.

Cap shower outlet if deck-mount spout, diverter, or handshower is connected to spout outlet.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between valve and wall-mount spout.

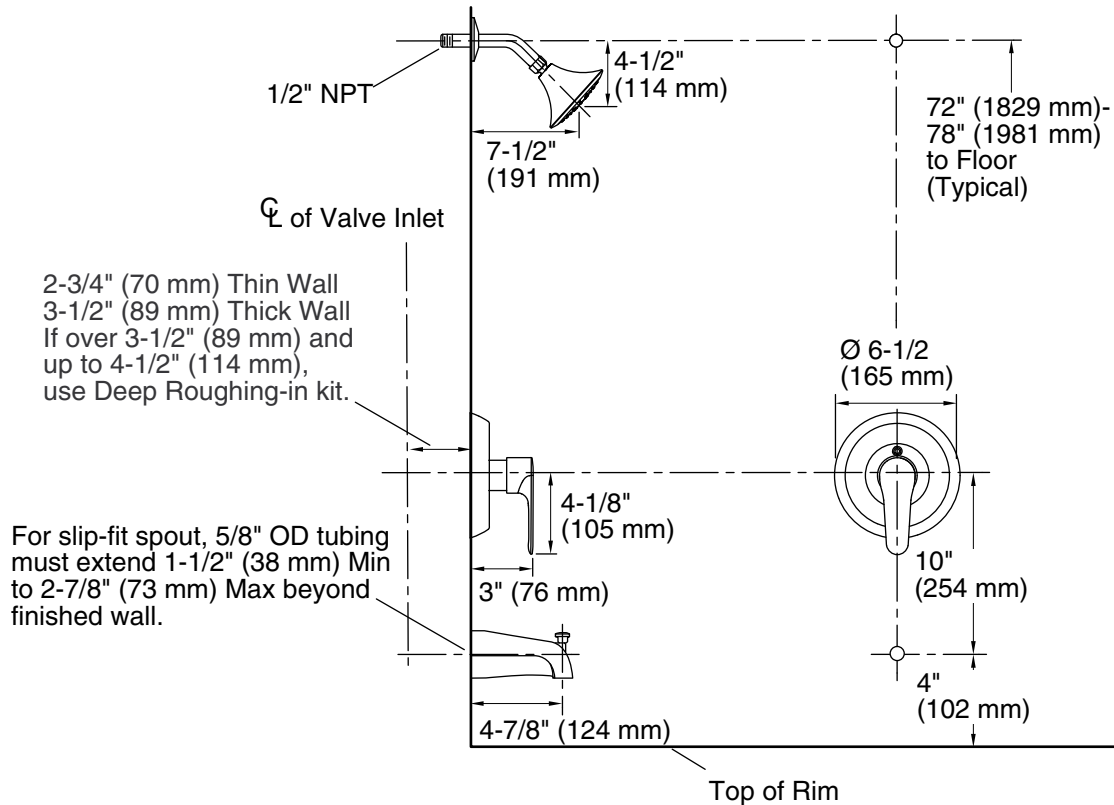

## Product Diagram