

### Features

- Includes face plate with handle.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal lever handle.
- Complements the Artifacts faucet and accessory collections.

### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards.

### Installation

• Trim set requires valve to complete installation.

### **Required Products/Accessories**

K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{R}}$  Valves or

K-8304/K-P8304 Series Rite-Temp® Valve & Cartridge Kits or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

#### or

K-2971-KS 3/4" Pressure-balancing Valve

### **Optional Products/Accessories**

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies



ADA CSA B651

### **Codes/Standards**

ASME A112.18.1/CSA B125.1 ADA ICC/ANSI A117.1 CSA B651

## KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

### Color Code Description


| CP  | Polished Chrome               |
|-----|-------------------------------|
| SN  | Vibrant® Polished Nickel      |
| BN  | Vibrant® Brushed Nickel       |
| BV  | Vibrant® Brushed Bronze       |
| 2BZ | Oil-Rubbed Bronze             |
| 2MB | Vibrant Brushed Moderne Brass |
| VNT | Vintage Nickel                |



### Artifacts® Rite-Temp® Valve Trim K-TS72767-4

# KOHLER. Faucets

Artifacts® Rite-Temp® Valve Trim K-TS72767-4

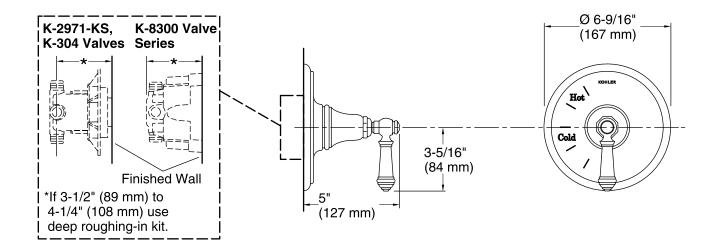

### **Technical Information**

All product dimensions are nominal.

### Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

