

www.lawlervalve.com

DATA SHEET

Thermostatic

PAT. NO. 5,203,496.
5,323,960.
Water Controller

6,637,668.
7,140,394.
Model 805®
High-Low Water Mixer
Unit No. 86380

ASSE 1017 Approved

ASSE Lead Free Certified

Certified to CSA B125.3

Master water mixing valve shall be of the thermostatic type with liquid-filled thermal motor. It shall have bronze body construction with replaceable corrosion-resistant components. Valve construction shall employ a sliding piston control mechanism. Sliding piston and liner shall be of stainless steel material. Valve shall come equipped with union end stop and check inlets with removable stainless steel strainers. Valve shall control temperature from a low flow of 5 GPM* up to a maximum flow rate for a given pressure differential. Valve shall provide protection against hot or cold supply line failure and thermostat failure.

Includes a dial thermometer and two valved tempered water outlets. Unit is completely assembled and tested with necessary fittings, nipples and escutcheons. See below for cabinet specifications. Cabinet is shipped separately.

General Purpose - Cabinet Specifications:

	STAINLESS	CARBON STEEL			
Body:	18 Ga.	16 Ga.			
Door:	18 Ga.	16 Ga.			

Material: Type 304 with Baked enamel

No. 4 Finish

VALVE FINISH

Rough Bronze	Other	
Chrome		

TYPE OF CABINET MATERIAL

Recessed Semi-Recessed	Stainless Carbon Steel Carbon Steel Box/	
Surface	Stainless Door	

Cabinet includes lock with two keys. Hinged left side, piano type.


For specifications on security cabinets, contact factory.



5330 East 25th Street Indianapolis, Indiana 46218 Phone (317) 261-1212 Fax (317) 261-1208

DIMENSIONS:

Valve Number	A N.P.T.	B N.P.T.	С	D	E	F
805	2"	2"	17"	24"	33"	8″

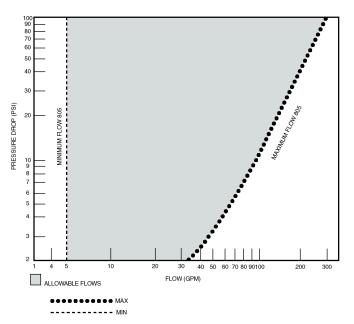

CAPACITIES - MODEL 805

Pressure Drop PSI	5	10	20	30	45	60	80
Valve Number	Capacity						
805-GPM	64	96	133	165	200	230	265
805-LPM	242	363	503	624	757	870	1003

^{*1/2} gpm when properly installed in recirculated system.

Design and specification subject to change without notice.