
THERMOSTATIC MIXING VALVE

ECO-MIX TM

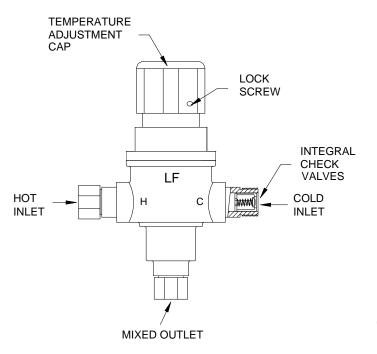

MINIMUM	PRESSURE DROP						
FLOW	5	10	_ 20	30	40	50	PSI
	.35	.70	1.4	2.1	2.8	3.4	BAR
0.25	1.7	2.3	3.0	3.6	4.4	5.0	GPM
0.95	6.4	8.7	11.4	14	17	19	l/min
0.95	6.4	8.7	11.4	14	17	1	9

Engineer's Approval	Job #		
	Arch/Eng.		
	Contractor		

MODEL 170-LF

LEAD FREE THERMOSTATIC POINT OF USE MIXING VALVE

MODEL 3/8" inlets, 3/8" outlet, compression connections

MATERIALS:

- Lead Free Bronze body
- Locked temperature adjustment cap (vandal resistant)
- Copper encapsulated thermostat assembly with polymer thermoplastic shuttle
- Stainless steel springs
- Buna-N O-rings
- Integral check valves on hot and cold inlets
- Compression fittings on inlets and outlet

PRESSURE-TEMPERATURE:

- Minimum Flow:0.25 GPM (.95 l/Min)
- Maximum Pressure:125 PSI (8.6 BAR)
- Maximum Hot Water temperature: 200°F- (93°C)
- Approach Temperature 5°F (2.8°C) above set point.
- Temperature adjustment range, 90-140°F (32-60°C) **

OPTION: (Furnished separately)

BP- Cold water By-Pass
BRKT- Mounting Bracket

**NOTE: For temperatures outside of this valve's stated range, please see our line of bi-metal valves.

ASSE 1070 CERTIFIED




This product is certified to meet Low Lead requirements of wetted surface area containing less than 0.25% lead by weight

* 0.25 GPM minimum flow certified to ASSE 1070




1360 Elmwood Avenue, Cranston, RI 02910 USA Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com
Web Site: http://www.leonardvalve.com

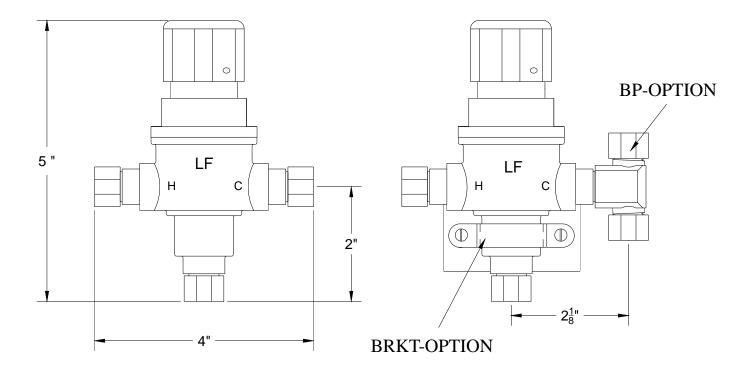

APPLICATION

The Model 170-LF is a high performance Temperature Actuated Mixing Valve used to supply single outlets. Can be used to supply one sensor faucet or one two handle manual faucet.

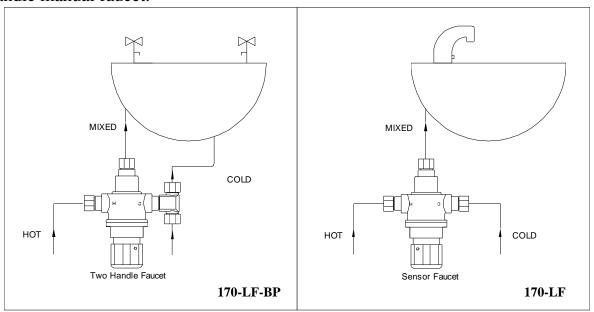

Note: Leonard Valve Company reserves the right of product, or design modifications without notice or obligation.



1360 Elmwood Avenue, Cranston, RI 02910 USA Phone: 401.461.1200 Fax: 401.941.5310

Email: info@leonardvalve.com
Web Site: http://www.leonardvalve.com