



Buy it for looks. Buy it for life.®

**DESCRIPTION**

- Reflex® System offer smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Pullout spray with 68" braided hose with Duralock Quick Connect installation
- 3/8" compression connections will accept standard ball nose connection for 3/8" tubing
- High arc spout provides height and reach to fill or clean large pots while the pullout wand provides the maneuverability for cleaning and rinsing 120° spout rotation

**OPERATION**

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in spray or stream mode in the pullout or retracted position

**FLOW**

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi (max)

**CARTRIDGE**

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

**STANDARDS**


- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- ADA  for lever handle

**WARRANTY**

- Limited lifetime warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installation


# Specifications



**VOSS™**  
**Single Handle Pullout Kitchen Faucet**

**Model:** 9125 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/2" (38mm) MIN. DIA.

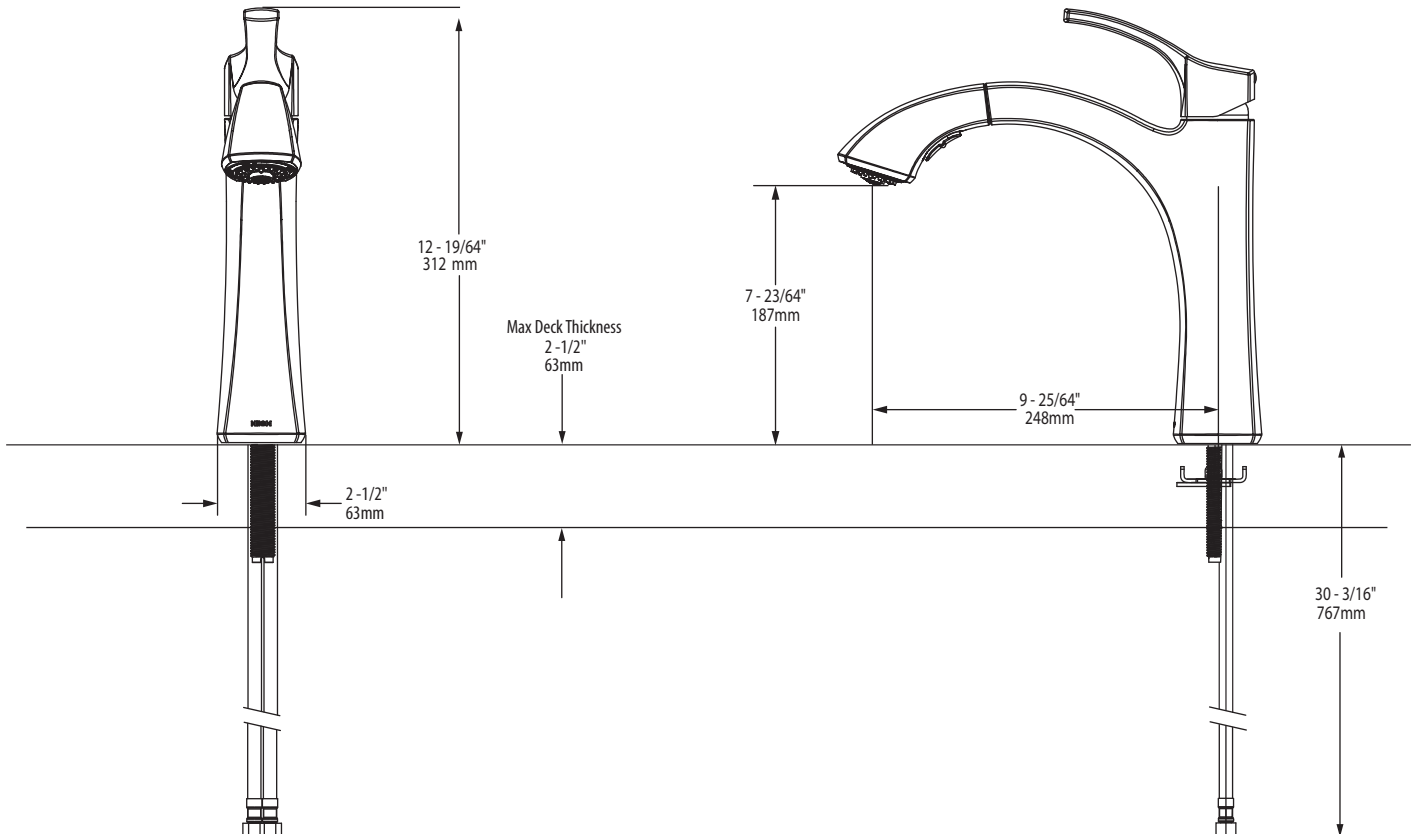

**CRITICAL DIMENSIONS**

(DO NOT SCALE)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

**www.moen.com**