

### Trim:

#### PTT188780

Lever Handle Shower Only

#### PTT188790

Lever Handle Tub/Shower

### STANDARD SPECIFICATIONS





- Slip-on tub spout, model PTT188790.
- Pressure balanced bath mixing valve
- Tub/Shower. Requires 1 1/2" wall cavity.
- Back-to-back installation capability.
- Forged brass body.
- Cartridge utilizes integral check valves to prevent the cross flow of water within the valve. Valve reduces the flow of water to 5 GPM within 5 seconds of the complete loss of pressure in the cold water supply line. Outlet water temperature is maintained within  $\pm 3^\circ$  variation with changes in either hot or cold supply of up to 50 percent of the normal supply pressure. Temperature is controlled by handle with cold water always coming on first.
- Field adjustable means to limit handle rotation into hot water zone.
- Temperature control to rotate a maximum of  $120^\circ$  from full cold to the maximum temperature.
- Single Handle
- Temperature Only Controlled with Handle
- For use with automatic compensating valves rated at 7.28 L/min (1.92 gpm) or less.

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- ASSE 1016

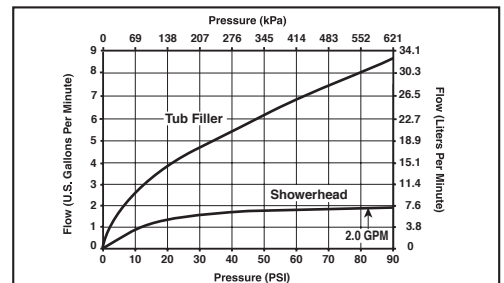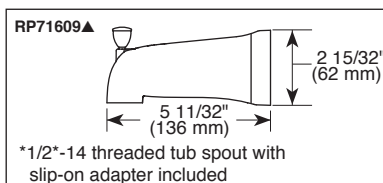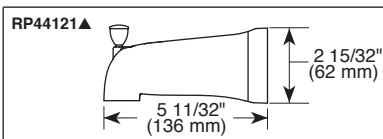

▲ Designate Proper Finish Suffix