



T771


Single Stage

1 Heat Only or 1 Cool Only

Battery or Hardwire

Non-programmable

- One universal model for heat only or cool only
- Low setpoint range down to 25 degrees Fahrenheit
- Setpoint limits
- 4 square inch lighted display
- Great for garage or warehouse applications and computer equipment rooms
- 5 year warranty

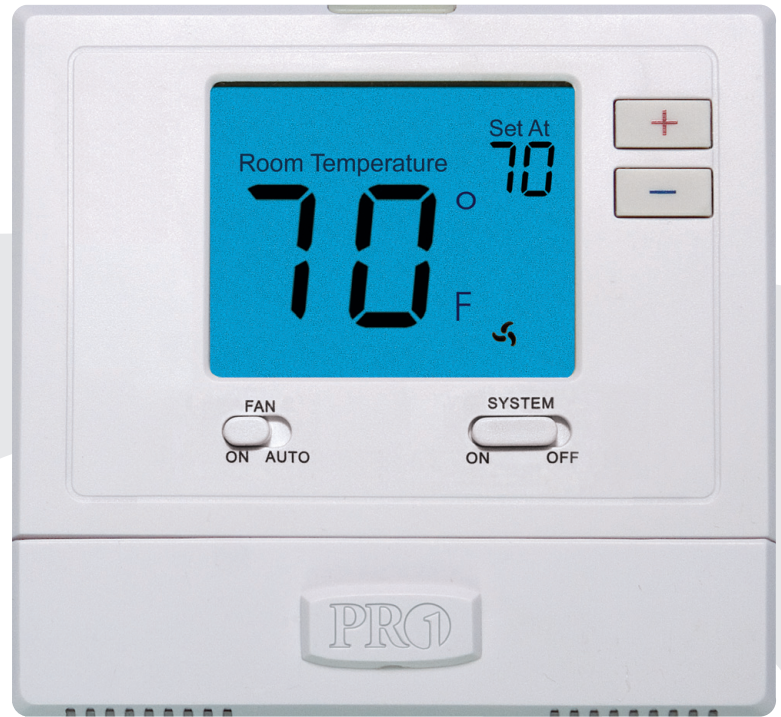

Accessories:

- T119 Plastic Wall plate

Specifications

The display range of temperature

20°F to 95°F (-6°C to 35°C)

The control range of temperature

25°F to 90°F (-4°C to 32°C)

Load rating

1 amp per terminal, 1.5 amp maximum all terminals combined

Display accuracy

± 1°F

Swing (cycle rate or differential)

Heating is adjustable from 0.4°F to 2.0°F

Cooling is adjustable from 0.4°F to 2.0°F

Power source

18 to 30 VAC, NEC Class II, 50/60 Hz for hardwire (common wire)

Battery power from 2 AA 1.5v batteries

Operating ambient

20°F to +105°F (0°C to +41°C)

Operating humidity

90% non-condensing maximum

Dimensions of thermostat

4.7"W x 4.4"H x 1.1"D

Rev. 0925