


DURAWATT® CL

COMMERCIAL ELECTRIC WATER HEATERS MEDIUM-DUTY ▪ STANDARD CONSTRUCTION

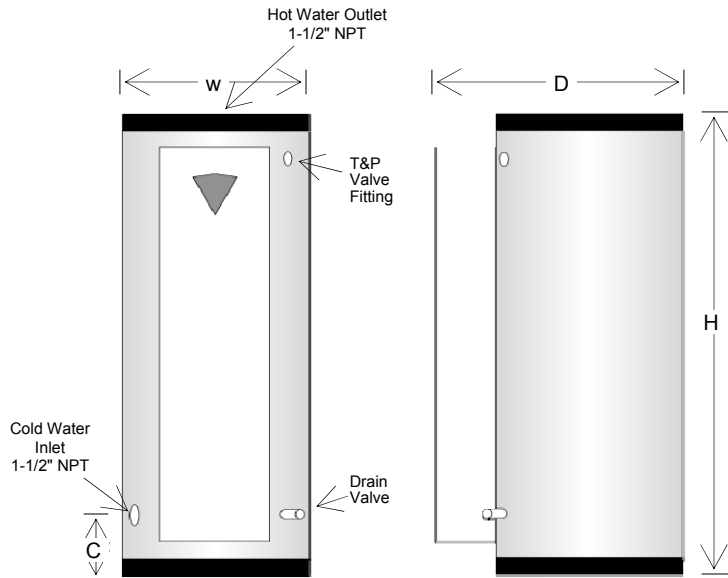

ANSI/UL 1453
CAN/CSA-C22.2 No. 110-M90

Model No.	Gallons Storage	kW Input	gph from 40° to 120°F	gph from 40° to 140°F	H Height	W Width	D Depth	C Height to Cold Inlet	Weight (lb)
45 C 80-E	80	9	45	37	58	26	34	8.5	417
60 C 80-E	80	12	60	49	58	26	34	8.5	417
90 C 80-E	80	18	90	74	58	26	34	8.5	417
120 C 80-E	80	24	120	98	58	26	34	8.5	417
150 C 80-E	80	30	150	123	58	26	34	8.5	417
180 C 80-E	80	36	180	148	58	26	34	8.5	417
230 C 80-E	80	48	230	184	58	26	34	8.5	417
280 C 80-E	80	52	266	213	58	26	34	8.5	417
45 C 100-E	100	9	45	37	69.5	26	34	8.5	434
60 C 100-E	100	12	60	49	69.5	26	34	8.5	434
90 C 100-E	100	18	90	74	69.5	26	34	8.5	434
120 C 100-E	100	24	120	98	69.5	26	34	8.5	434
150 C 100-E	100	30	150	123	69.5	26	34	8.5	434
180 C 100-E	100	36	180	148	69.5	26	34	8.5	434
230 C 100-E	100	48	230	184	69.5	26	34	8.5	434
280 C 100-E	100	52	266	213	69.5	26	34	8.5	434
60 C 119-E	119	12	60	49	69.5	28	36	9	497
90 C 119-E	119	18	90	74	69.5	28	36	9	497
120 C 119-E	119	24	120	98	69.5	28	36	9	497
150 C 119-E	119	30	150	123	69.5	28	36	9	497
180 C 119-E	119	36	180	148	69.5	28	36	9	497
230 C 119-E	119	48	230	184	69.5	28	36	9	497
280 C 119-E	119	52	266	213	69.5	28	36	9	497

Dimensions in inches unless otherwise noted.

