SPECIFICATIONS (NT-100-B)

- 1. 4" inlet and outlet connections, 2" vent connection.
- 2. Liquid holding capacity: 117 Gallons
- Unit weight w/std. cover: 178 Pounds
 16,000 lb. load rated, bolted, gas/water tight
- composite covers.
- 5. Maximum operating temperature 190°F continuous.

NOTES

- 1. For gravity drainage applications only. Do not use for pressure applications.
- 3/8" thick seamless high density polyethylene walls. 2.
- 3. Unit supplied with built-in adapter for up to 6" of adjustability. Additional riser(s) are also available for deeper burial depth.
- 4. Cover placement allows full access to tank for proper maintenance.
- Unit for below grade installation. 5.

ENGINEER SPECIFICATION GUIDE

Striem NT Series neutralization tank model NT-100-B shall be lifetime guaranteed and Made in USA of seamless, rotationally-molded High Density Polyethylene or Polypropylene with minimum 3/8" uniform wall thickness. Tank shall be furnished with inlets, outlets, vents, cover, bracing, riser system, monitoring equipment and other modifications per jobsite-specific conditions and per engineer's specification.

OPTIONS:


- Teleglide field adjustable risers for extending covers to grade
- Seamless polyethylene tank material
- Seamless polypropylene tank material
- Plain end connections available in 1-1/2", 2",3", 4" and 6" pipe size
- Female pipe thread connections available in 1-1/2", 2", 3" and 4" pipe size.
- Flanged pipe connections available in 1-1/2", 2", 3", 4" and 6" pipe size

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC.

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC. IS

PROHIBITED.

90%+ calcium carbonate limestone

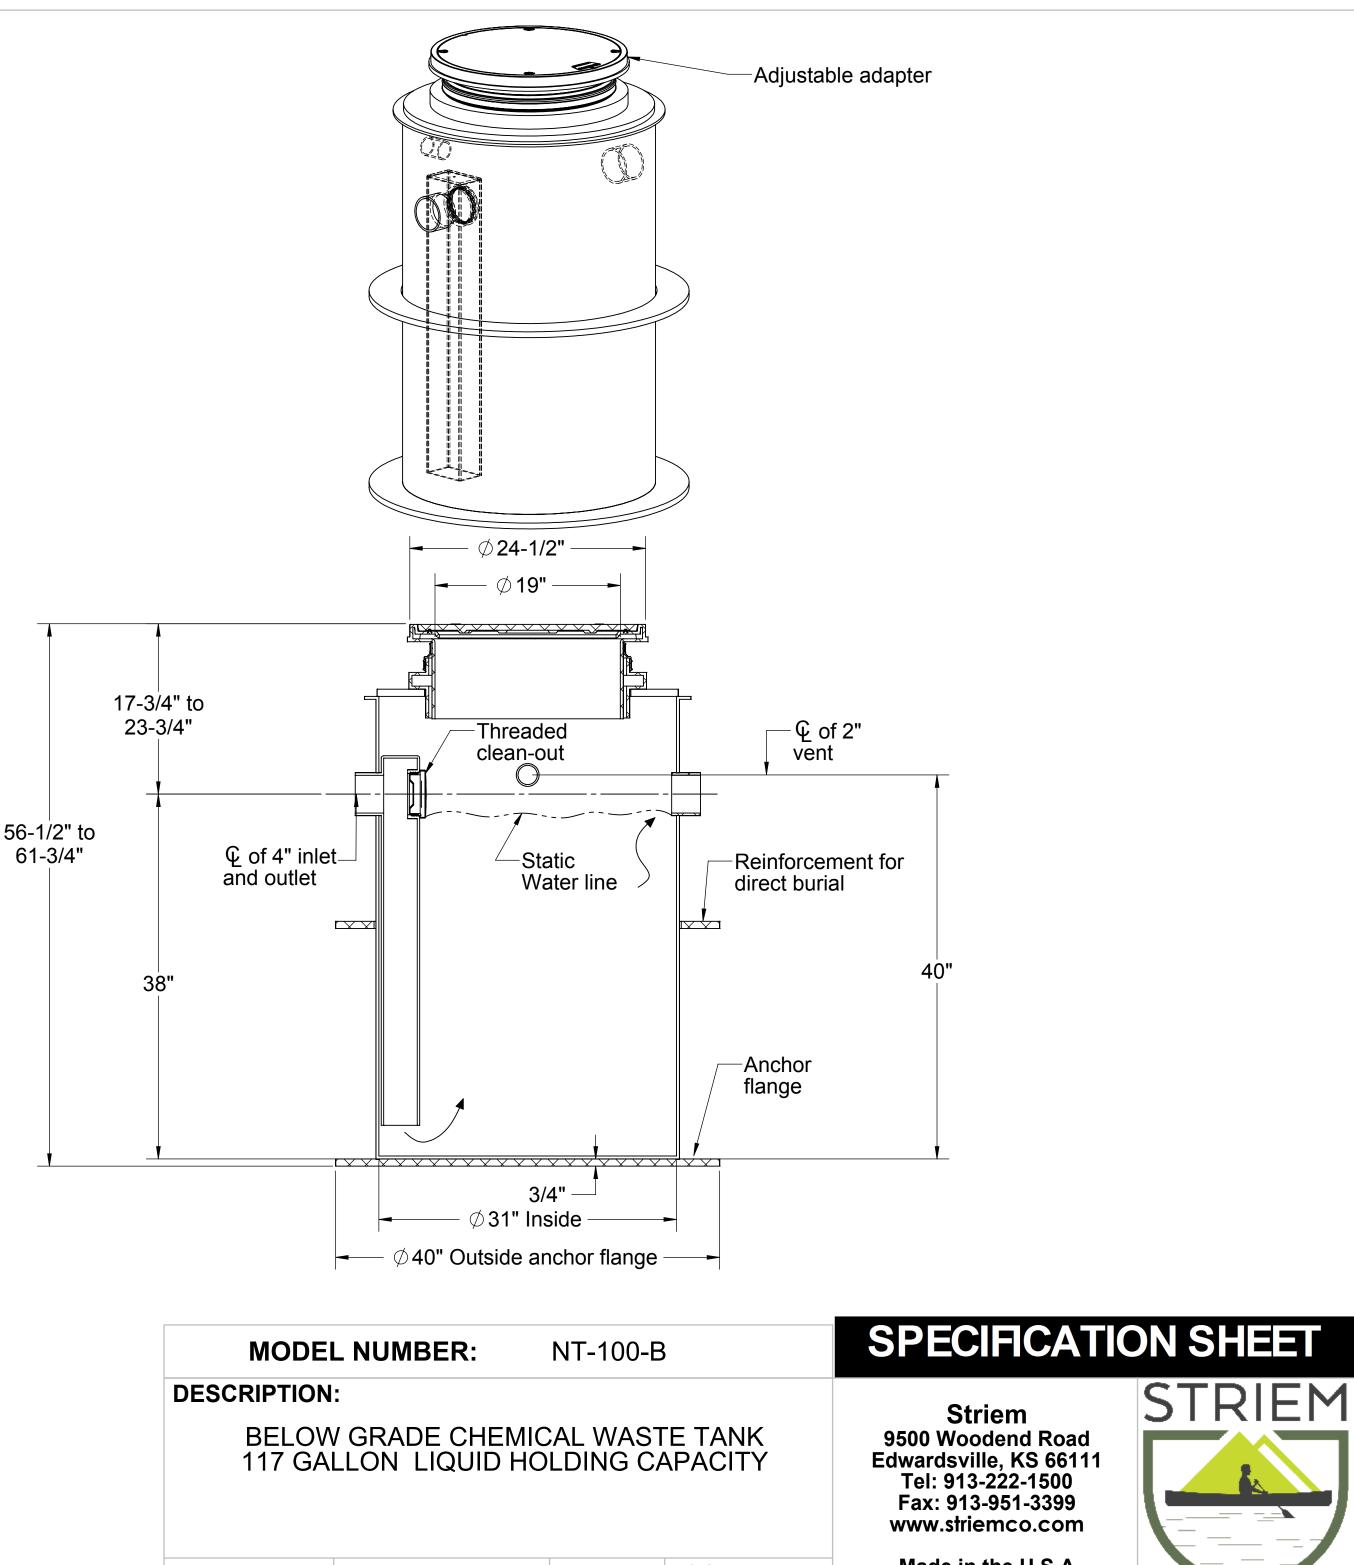

MODEL NUMBER:		
DESCRIPTION:		
	/ GRADE Llon Li	
DWG BY: RS	DATE:	5/25

25/17 **REV**: ECO: Made in the U.S.A