

HardHat™

Heavy-Duty DWV Test Cap



Tough

Thicker wall section. Deep socket for better glue joint

Holds higher test pressures than most test caps

Heavy Duty

1½" and 2" models hold up to 40PSI test*



3" and 4" models hold up to 25PSI test*



Specs

Size	Diameter	Max Test Pressure *
1½"	2⅛"	40 PSI
2"	2⅝"	40 PSI
3"	3¾"	25 PSI
4"	4¾"	25 PSI

Be sure to cut pipe as squarely as possible. Install with appropriate primer/cleaner and solvent cement per manufacturer's instructions. Allow specified amount of time for cement to cure before pressure test.

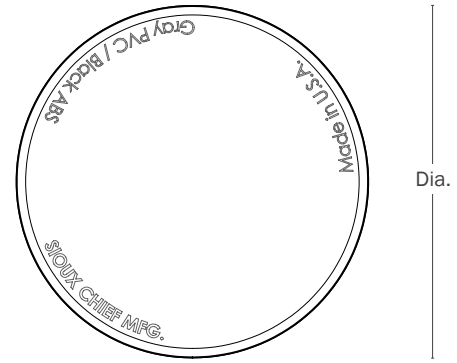

880-01P



880-02A



880-03P



880-04A

» Buying Information

ITEM NO.	DESCRIPTION	PKG.	MIN. QTY.	CASE QTY.
PVC TEST CAPS				
880-01P	1½" HardHat™ test cap for PVC Sch. 40 pipe	B	50	500
880-02P	2" HardHat™ test cap for PVC Sch. 40 pipe	B	25	500
880-03P	3" HardHat™ test cap for PVC Sch. 40 pipe	B	25	250
880-04P	4" HardHat™ test cap for PVC Sch. 40 pipe	B	25	100
ABS TEST CAPS				
880-01A	1½" HardHat™ test cap for ABS Sch. 40 pipe	B	50	500
880-02A	2" HardHat™ test cap for ABS Sch. 40 pipe	B	25	500
880-03A	3" HardHat™ test cap for ABS Sch. 40 pipe	B	25	250
880-04A	4" HardHat™ test cap for ABS Sch. 40 pipe	B	25	100

* Not a recommendation - DWV pipe is not designed/intended for high-pressures

PACKAGING:

B = Bulk

C = Cut Case

I = Individually Bar-Coded