

► **Code Number**

3919632

► **Description**

Concealed Water Closet Flushometer, for wall hung back spud bowls.

► **Flush Cycle**

Model 152-1.6 Low Consumption (1.6 gpf/6.0 Lpf)

► **Specifications**

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Metal Direct Acting, Non-Hold-Open Push Button with Triple Seal Handle Packing
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Chrome Plated Exposed Flushometer Parts
- Elbow Flush Connection for 1½" Concealed Back Spud
- Flush Accuracy Controlled by CID Technology
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► **Variations**

Vaccum Breaker 0323237


► **L Dimension**

3 3/4 inch LDIM

Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2¾" (70 mm).

► **Accessories (Sold Separately)**

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

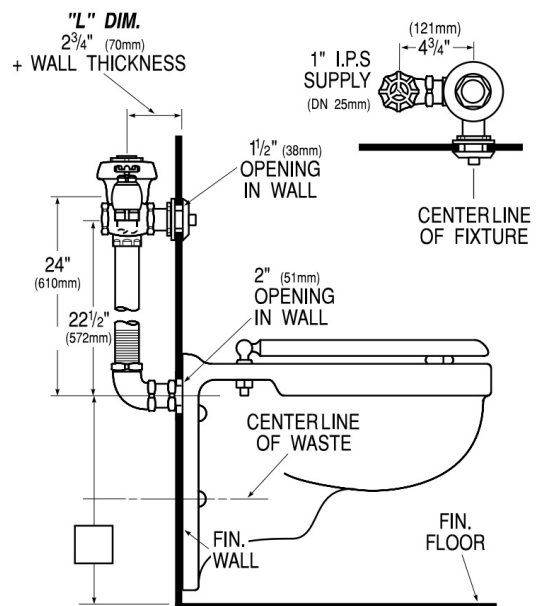

► **Compliance & Certifications**



Made In The
USA

This space for Architect/Engineer Approval