

► **Code Number**

3781500

► **Flush Cycle**

3.5 gpf/13.2 lpf

► **Description**

Concealed Water Closet Flushometer — 1" I.P.S. Outlet, for bowls and flushing rim floor drains.

► **Specifications**

Quiet, Concealed, Rough Brass Closet Flushometer for either left or right hand supply with the following features:

- PERMEX® synthetic rubber diaphragm with linear filtered bypass and Vortex Cleansing Action™
- Metal Direct Acting, Non-Hold-Open Push Button with Triple Seal Handle Packing
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop
- Vacuum Breaker
- 1" Female I.P.S. union outlet (no flush connection)
- Chrome Plated Exposed Flushometer Parts
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID Technology
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.

► **L Dimension**


Specify the "L" Dimension for the proper length of the Handle Assembly and Flush Connection. The "L" Dimension is equal to the Wall Thickness (to the nearest whole inch) plus 2 3/4" (70 mm).

► **Variations**

- WB - For installation with Sloan Easy Access Wall Box
- LDIM - 2 3/4

► **Accessories**

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

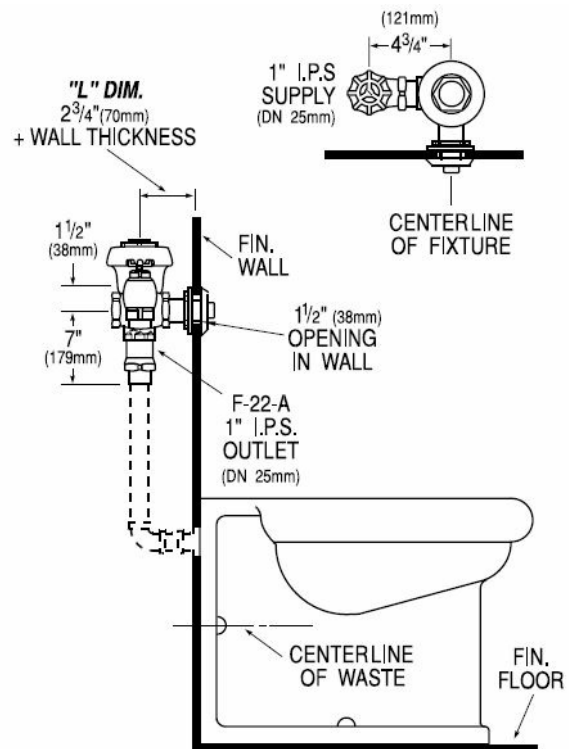

NOTE : Flush Connections shown in dotted lines not included.

► **Compliance & Certifications**



Made In The  
**USA**

This space for Architect/Engineer Approval