

► **Code Number**

3315308

► **Description**

Battery Powered, Sensor Activated, Chrome Plated Brass, 4" Centerset Electronic Hand Washing Faucet for tempered or hot/cold water operation.

► **Flow Rates**

0.5 gpm/1.9 Lpm Vandal Resistant Spray Head

► **Specifications**

- Appropriate Mounting Hardware included
- Splash-proof Circuit Control Module
- Serviceable Filtered Solenoid Valve
- Vandal Resistant Spray Head with Pressure Compensating Flow Control
- Includes four (4) C-size Alkaline Batteries
- Sensor Range Adjustment Screw
- User Friendly Variable Time Out Settings
- ADA Compliant, Battery Powered, Sensor Activated, Chrome Plated Cast Brass, 4" Centerset Hand Washing Faucet with the following features:
- Low Battery LED Indicator Light
- Metal Jacketed Wire Protection for Sensor lead

► **Variations**

8" Trim Plate

BDT - Below Deck Thermostatic Mixing Valve

► **Accessories (Sold Separately)**

See OPTIMA Accessories Section of the Sloan Catalog for a Complete listing of OPTIMA Faucet Accessories and Variations.

► **Sensor Range**

Factory Set: 4" - 5" (102 mm - 127 mm)

Adjustable: 2" - 7" (51 mm - 178 mm)

► **Battery Life**

2 Years @ 8,000 Flushes / Month

► **Control Circuit**


6 VDC — operates on four (4) alkaline C-size batteries.

► **Solenoid Valve**

Low Energy Latching Solenoid with Self cleaning By-pass and Integral Clean Out Strainer Filter.

► **Indicator Lights**

Range Adjustment

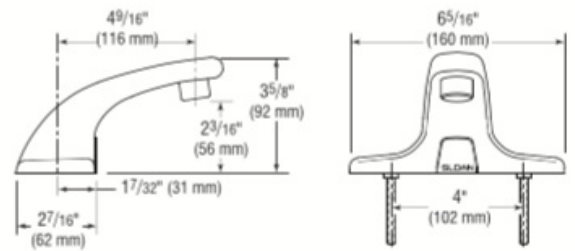

► **Automatic Operation**

The Sloan OPTIMA Plus® EBF-655 Battery Powered Hand Washing Faucet operates by means of an infrared sensor. Once the user's hands enter the sensor's effective range, the Solenoid activates the water flow. Tempered water flows from the Faucet until hands are moved away. The Faucet then automatically shuts off and rests for the next user.

► **Hygienic**

The ultimate in sanitary protection — there are no handles to turn or buttons to push. Helps to control the spread of infectious diseases. Ideal for high traffic commercial installations.

► **Economical**

Automatic operation provides water usage savings over other faucet devices. Reduces maintenance and operation costs. The 4" Centerset design makes the EBF-655 Faucet secure against abuse and vandalism. Battery operation ideal for Retrofit installations.

► **Compliance & Certifications**



This space for Architect/Engineer Approval

► **Time Out Adjustment Settings**

30 seconds — The Faucet Time Out Setting determines the maximum time the faucet will run upon continuous detection. The EBF-655 is Factory set at the 30 second time out. Consult factory for time out settings to meet individual application requirements.