

Stinson® Comfort Height®

Two-piece elongated chair height toilet 402396

Features

- Two-piece design.
- Elongated bowl offers added room and comfort.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- 1.28 gpf (4.8 lpf).
- 2" (51 mm) fully-glazed trapway.
- Floor-saver footprint helps cover the old footprint left by many standard two-piece toilets.

Technology

 Pro Force® Plus flushing technology delivers greater flushing power than previous Pro Force® models.

Installation

- Standard 12" (305 mm) rough-in.
- Three-bolt quick-connect installation.
- Supply line sold separately.

Recommended Products/Accessories

K-20466 Stonewood® Quiet-Close™ Elongated Toilet Seat K-20110 Brevia™ Quiet-Close™ Elongated Toilet Seat K-5420 Low-Profile Bolt Caps

K-23726 Drain treatment

K-23724 Toilet cleaner & disinfectant

K-23734 Toilet bowl cleaner & disinfectant

Included Components

Product consists of:

403316 Elongated chair height toilet bowl

404558 Toilet tank

Additional Components:

Bolt caps

Left-hand Chrome trip lever

Tank cover

Tank hardware accessory pack



Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

STERLING® Warranty - Toilets and Lavatories

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color Code Description

) White



Stinson® Comfort Height®

Two-piece elongated chair height toilet 402396

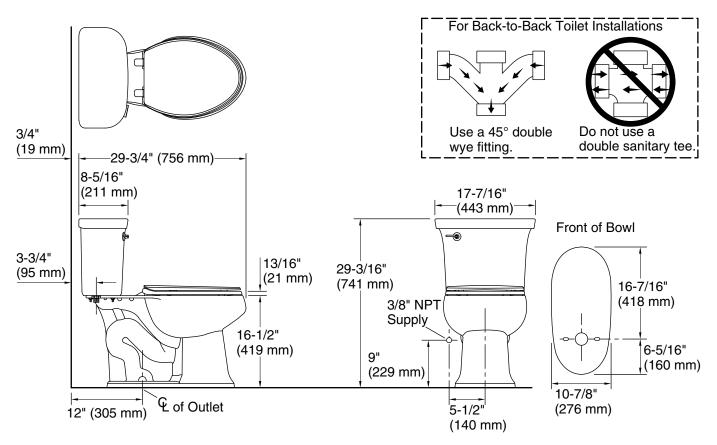

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated

Flush type: Gravity siphon jet

Trap passageway: 2" (51 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf) Rough-in: 12" (305 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.