

Location:

SYMMONS® Dia™

Hand Shower System 3503-H301-V-CYL-B Specification Submittal



Feature Highlights

- Symmons Hand Shower System with Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless brass escutcheon (-B)
- Cylinder (-CYL) style lever handle
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available
- Wall/hand shower, single mode, #H301-V with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Polished chrome finish (standard)

Model Numbers

- 3503-H301-V-CYL-B
Hand Shower System with Symmons Temptrol® mixing valve p/n 4000-BODY
- 3503-H301-V-CYL-B-TRM
Trim only, valve must be ordered separately
- 4000-BODY
Symmons Temptrol® mixing valve without trim
- 4000-X-BODY
Symmons Temptrol® mixing valve without trim. Valve includes integral service stops to allow water shut-off for service

Finish Options / Modifications

Append appropriate -suffix to model number

- STN Satin nickel
- Polished chrome (standard finish)

Standards / Certifications

ASME A112.18.1; CSA B125.1
Americans with Disabilities Act (ADA) compliant

Warranty

- 5 years - for commercial installations

Options / Modifications

Append appropriate -suffix to model number

- IPS IPS connections: 1/2 inch female IPS connections on Temptrol® mixing valve
- X Service Stops: Temptrol® mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY (available when ordering 3503-H301-V-CYL-B)
- CHKS Check Stops: Temptrol® mixing valve includes integral check stops (Requires integral service stops, suffix -X. Used in installations where a positive shut-off device is used downstream of mixing valve.)
- REV Reverse core: Temptrol® mixing valve with reverse core. (Requires integral service stops, suffix -X. Used in back-to-back system installations. HOT on the right, COLD on the left)
- Delete Suffix B Chrome plastic escutcheon chrome plastic escutcheon is supplied instead of standard brass escutcheon
- 2.0 Flow rate restrictor, 2.0 gpm (7.6 L/min)
- 1.5 Flow rate restrictor, 1.5 gpm (5.7 L/min)
- L/HS Hand Shower wand not included, Includes hose, in-line vacuum breaker, wall connections and flange only
- QD Quick-disconnect on hand shower
- 72 6 foot metal hose in place of 5 foot hose
- R60 Vinyl 5 foot hose in place of metal hose
- R72 Vinyl 6 foot hose in place of metal hose
- B48 48 inch slide bar in place of standard 30 inch


Handle Options / Modifications

Append appropriate -suffix to model number



- LR Lever handle
- LP Loop style lever handle

Dimensions Dia Hand Shower System, 3503-H301-V-CYL-B

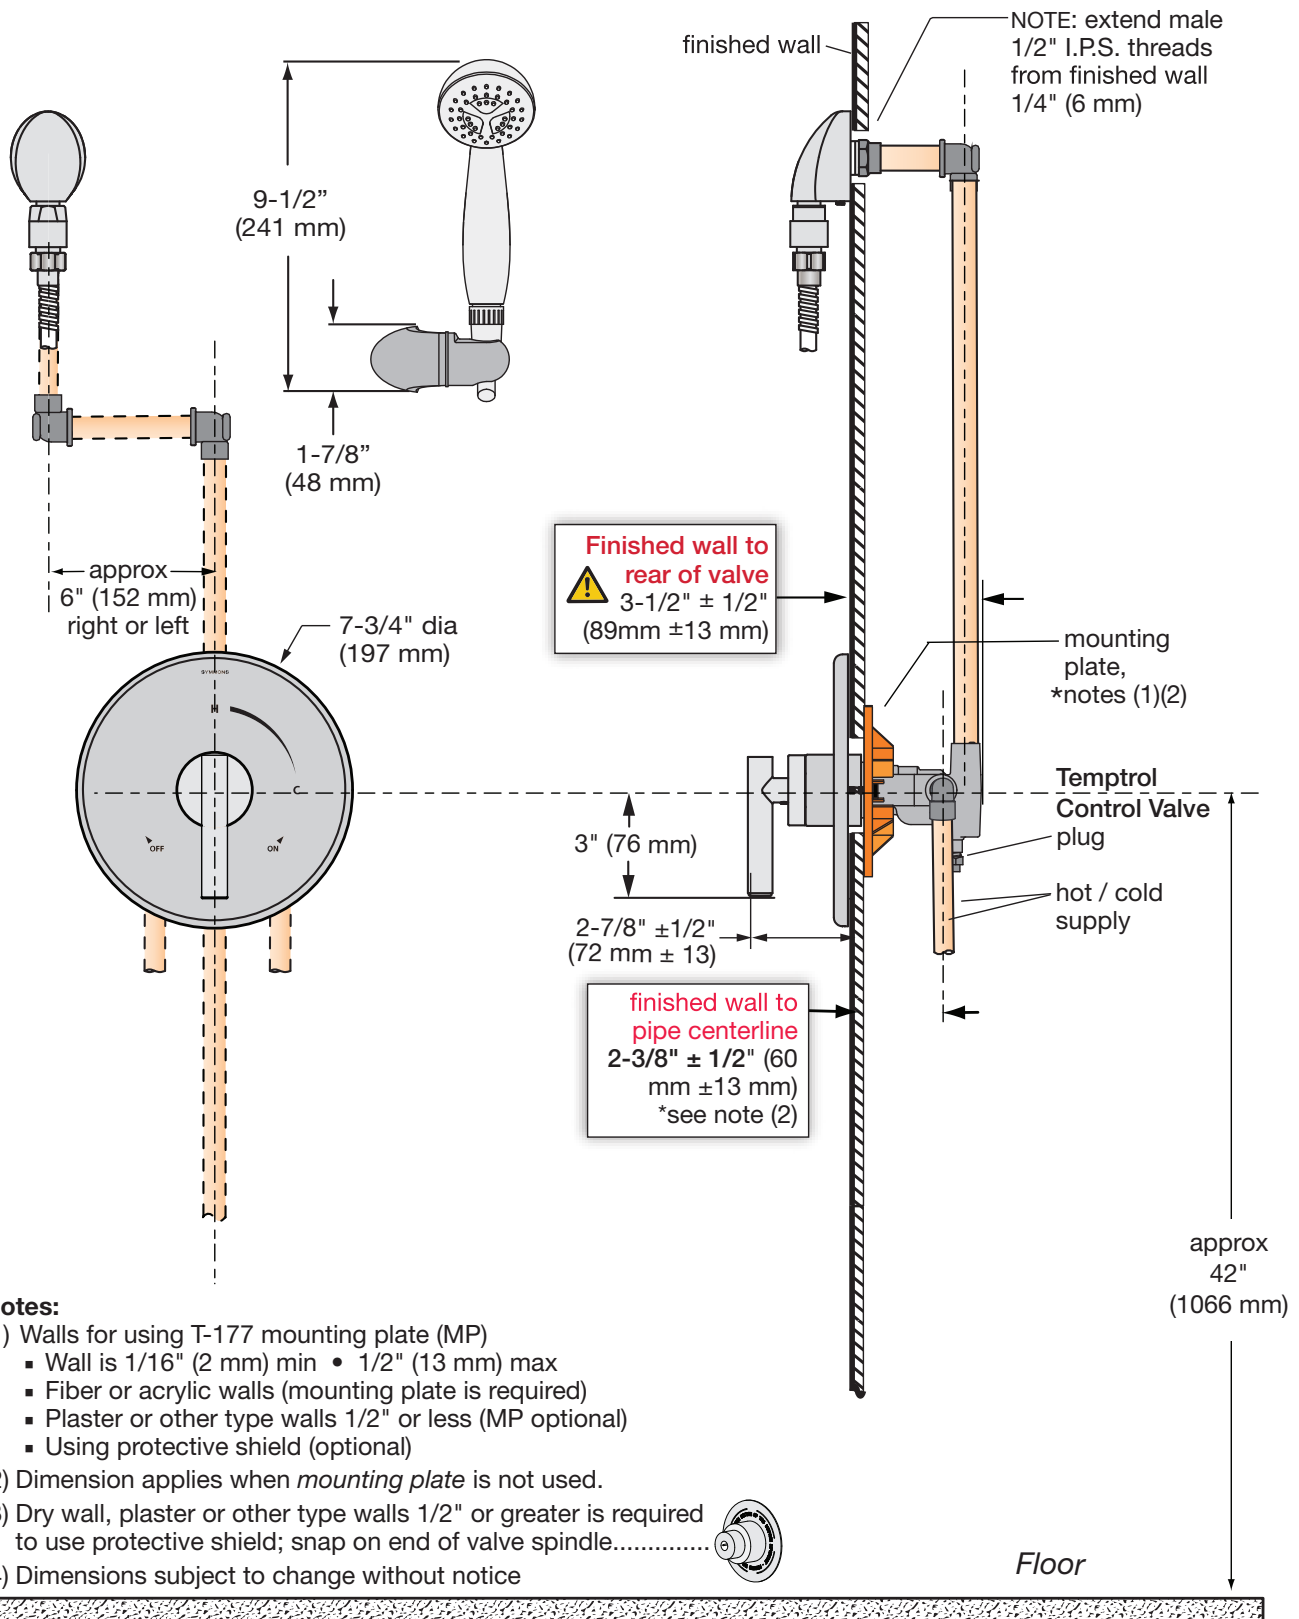

*** Notes:**

- (1) Walls for using T-177 mounting plate (MP)
 - Wall is 1/16" (2 mm) min • 1/2" (13 mm) max
 - Fiber or acrylic walls (mounting plate is required)
 - Plaster or other type walls 1/2" or less (MP optional)
 - Using protective shield (optional)
- (2) Dimension applies when *mounting plate* is not used.
- (3) Dry wall, plaster or other type walls 1/2" or greater is required to use protective shield; snap on end of valve spindle.....
- (4) Dimensions subject to change without notice

