
TAG:	

# Side Mount Faucet

## **Architect/Engineering Specifications:**

Deck mounted single lever remote on/off control base faucet with polished chrome plated brass body, polished chrome plated brass deck mount swivel gooseneck, 2.2 GPM vandal resistant aerator, ceramic cartridge with adjustable temperature limit stop, single lever handle and 16" flexible stainless steel supply hoses with 3/8" compression connections, 36" flexible stainless steel hose and spray valve with rosespray outlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

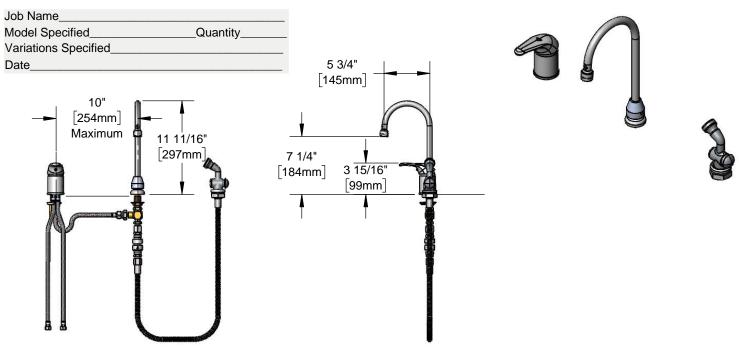

## Features & Benefits:

- Deck mounted single lever remote on/off control base faucet w/ polished chrome plated brass body
- Polished chrome plated brass deck mount swivel gooseneck
- 2.2 GPM vandal resistant aerator, Series 6 (B-0199-06)
- Ceramic cartridge w/ adjustable temperature limit stop
- Single lever handle w/ color coded index
- 16" flexible stainless steel supply hoses w/ 3/8" O.D. compression connections
- 36" flexible stainless steel hose and spray valve w/ rosespray outlet
- Material: Polished chrome plated brass body, gooseneck & handle and stainless steel supply hoses

### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)

Warranty: One Year (Limited)

Ceramic Cartridge: Two Year (Limited)

## Performance Data:

Pressure: 20 - 125 psi
Temperature: 40°F - 140°F
Flow Rate: 2.2 GPM @ 60 psi



#### Optional Outlets (Series 1 / VR Series 6)

		Non-Aerated VR Non-Aerated			<b>Optional Handles</b>
GPM	Aerated	(Laminar)	VR Aerated	(VR Laminar)	□ 6" Long Handle
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035	
0.5	N/A	□ B-0199-01-N05	N/A	□ B-0199-06-N05	
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A	
1.2	□ B-0199-01-F12	2 □ B-0199-01-LF12	□ B-0199-06-F12	□ B-0199-06-LF12	
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR	
2.2	□ B-0199-01	□ B-0199-21	Standard	☐ B-0199-21-VRF	







T&S BRASS AND BRONZE WORKS, INC.

