



Z887-12-HD

12 [305] WIDE REVEAL x 24 9/16 [624] LONG CATCH BASIN W/ HEAVY-DUTY FRAME ASSEMBLY

TAG

Miscellaneous Options

-DB

-VP


- Y

Bottom Dome Strainer

Sediment Bucket

Vandal-Proof Lockdown

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

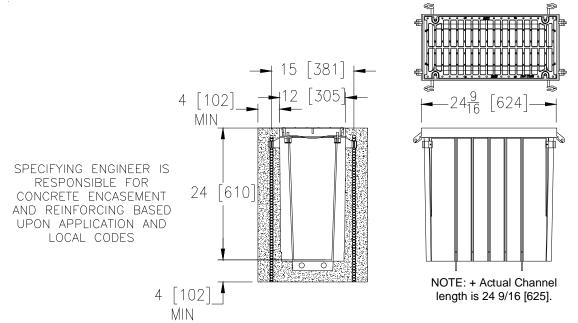

ENGINEERING SPECIFICATION: Zurn Z887-12-HD

ENGINEERING SPECIFICATION: 2urn 2887-12-HD Catch Basin shall be 12 [305] wide reveal x 24-9/16 [624] long and 24 [610] deep. Catch basin shall be made of 0% water absorbent High Density Polyethylene (HDPE). Shall mechanically lock into the concrete surround every 10 [254]. Basin shall weigh less than 14.6 Ibs.[6.6 kg]. Catch basin shall have rebar clips standard to secure basin in its final location. Shall be provided with standard DGC grates that lock down to frame. Zurn 12 [305] wide reveal Ductile Iron Slotted Grate conforming to ASTM specification A536-84, Grade 80-55-06. Ductile Iron grate is rated class C per the DIN EN1433 top load classifications. Supplied in 24 [608] nominal lengths with 13/16 [21] wide slots, and 1-1/2 [38] bearing depth. Grate has an open area of 57.50 sq. in per ft. [121708 sq. mm per meter]. The 1/4 [6] thick Heavy-Duty Carbon Steel Frame Assembly conforms to ASTM specification A36 with 4 - 4 [102] long concrete anchors per basin. Frame unplied with powder sected finish. All wolds must be performed by a cartified wolder per ASTM steaderd AW/S D11. Frames Shall supplied with powder coated finish. All welds must be performed by a certified welder per ASTM standard AWS D1.1. Frames Shall be produced in the U.S.A.

PREFIX OPTIONS (Check/specify appropriate options) ____ Z 12-inch by 24-inch High Density Polyethylene (HDPE) Catch Basin*

SUFFIX OPTIONS (Check/specify appropriate options)

<u>Adapters</u>				
E3/U3	3 [76] No-Hub End/Bottom Outlet Adapter	IA	Inlet Adapter (Z886)	
E4/U4	4 [102] No-Hub End/Bottom Outlet Adapter	IA	Inlet Adapter (Z882)	
E6/U6	6 [152] No-Hub End/Bottom Outlet Adapter			

Grate Options (Load Classifications are per DIN EN1433)

- Black Acid Resistant Epoxy Coated Ductile Grate Class C -BDC
- -BDE Black Acid Resistant Epoxy Coated Ductile Grate - Class E
- Galvanized Ductile Iron Bar Grate Class D -BG
- Ductile Iron Solid Cover Class C -DC
- -DGC Ductile Iron Slotted Grate - Class C *
- Ductile Iron Slotted Grate Class E -DGE
- -DGF Ductile Iron Slotted Grate - Class F
- Galvanized Ductile Slotted Grate Class C -GDC
- Galvanized Ductile Slotted Grate Class E -GDE
- Galvanized Ductile Slotted Grate Class F -GDF Galvanized Heel-Proof Ductile Grate - Class C
- -GHPD
- Galvanized Heel-Proof Ductile Slotted Grate Class E -GHPDE
- -HPD Heel-Proof Ductile Slotted Grate - Class C
- Heel-Proof Ductile Slotted Grate Class E -HPDE

MADE in the U.S.A. (Load Classifications are per DIN EN1433) - ADA-USA Meets Americans with Disabilities Act Requirements - Class C -DGC-USA Ductile Iron Slotted Grate - Class C	
-DGE-USA Ductile Iron Slotted Grate - Class E -FG Fabricated Galvanized Steel Slotted Grate - Class A	*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED
GADA-USA Galvanized Ductile ADA Slotted Grate - Class C GDC-USA Galvanized Ductile Slotted Grate - Class C GDE-USA Galvanized Ductile Slotted Grate - Class E	REV. B DATE: 7/15/11 C.N. NO. 121602
SBG-L Stainless Steel Bar Grate - Class B	DWG. NO. 302162 PRODUCT NO. Z887-12-HD

Phone: 814\455-0921 Fax: 814\454-7929 World Wide Web: www.zurn.com In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292