

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



PUMP COMPANY

Zoeller Family of Water Solutions™

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com

REPLACEMENT PARTS LIST FOR MODELS:


M57 AUTOMATIC 115V
D57 AUTOMATIC 230V
N57 NONAUTOMATIC 115V
E57 NONAUTOMATIC 230V

Consult factory for all other models

TO ORDER REPLACEMENT PARTS:


PLEASE FURNISH THE FOLLOWING INFORMATION:

- Model Number.
- Part Number of Pump.
 (If manufactured prior to June 1988, give 2 letter date code following Model No.)
- Part Number and Description of part.

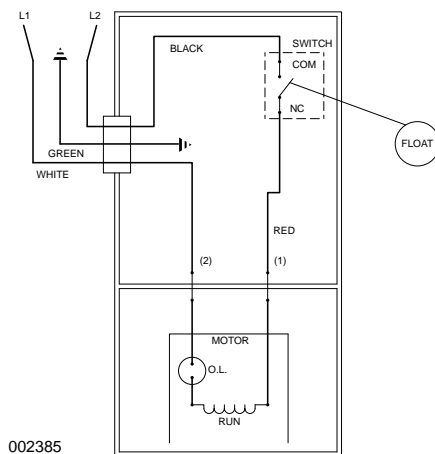


002385

WIRING DIAGRAM FOR MODELS
 "M57-A" and "M57-B"
 "D57-A" and "D57-B"
 8/79 (UI) thru 8/86 (US)

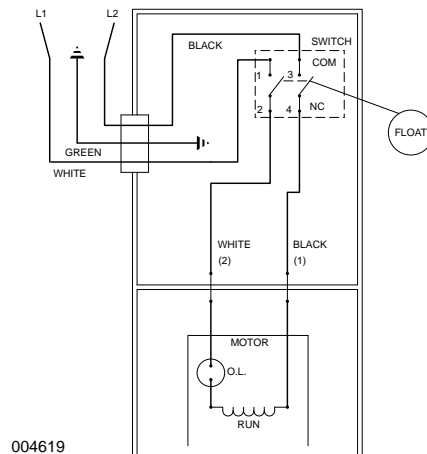

004619

WIRING DIAGRAM FOR MODELS
 "M57-C", "M57-D" and "M57-E"
 "D57-C", "D57-D" and "D57-E"
 9/86 (VS) thru Current

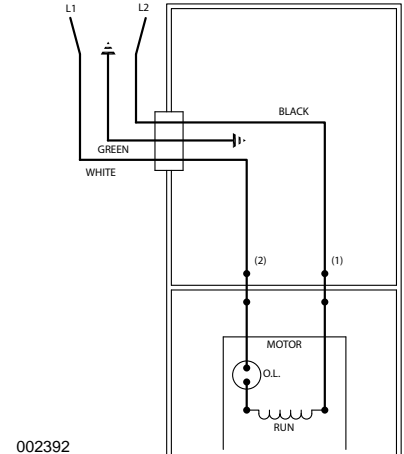

002392

WIRING DIAGRAM FOR MODELS
 "N57", "N57-A", "N57-B", "N57-C", "N57-D"
 "E57", "E57-A", "E57-B", "E57-C", "E57-D"
 8/79 (UI) thru Current

REPLACEMENT PARTS LIST FOR MODELS "M57" and "D57". See back page for "M57" and "D57" illustration.

MODELS:				M57-A	M57-B	M57-C	M57-D	M57-E	D57-A	D57-B	D57-C	D57-D	D57-E
REF. NO.	DESCRIPTION	QTY	NOTES	8/79 UI thru 12/80 YJ	1/81 MM thru 8/86 US	9/86 VS thru 3/87 OT	4/87 PT thru 6/92	7/92 thru Current	8/79 UI thru 12/80 YJ	1/81 MM thru 8/86 US	9/86 VS thru 3/87 OT	4/87 PT thru 6/92	7/92 thru Current
1	• Gasket, Case/Cover	1		034046	034046	034046	034046	034046	034046	034046	034046	034046	034046
2	• Clamp, Strain Relief-Red	1	1	001770	001770	001770	001770	001770	001770	001770	001770	001770	001770
3	• Seal, Cord-Asm	1	1	054025	002326	004322	004322	004322	054025	002326	004322	004322	004322
4	• Cord Term & Seal	1	1	054026	002321	004700	004700	004700	054057	002320	004707	004707	004707
5	• Stator GE	1	2	054040	054040	054040	054040	007951	054050	054050	054050	054050	007952
	• Stator Emerson	1	2	002473	002473	002473	002473	007953	005530	005530	005530	005530	007954
6	• Screw, #8-32 X 2.563 RHP1-Stlbo	2		001914	001914	001914	001914	001914	001914	001914	001914	001914	001914
7	• Rotor Asm GE	1	2	054032	054032	054032	054032	054032	054032	054032	054032	054032	054032
	• Rotor Asm Emerson	1	2	003735	003735	003735	003735	003735	003735	003735	003735	003735	003735
8	• Seal, Mtr Hsg	1		034007	034007	034007	034007	034007	034007	034007	034007	034007	034007
9	• Washer, Trst-Nyl. 875X.504X.050"	1		002140	002140	002140	002140	002140	002140	002140	002140	002140	002140
10	• Oil, Dielectric (19 Oz Can)	1		057022	057022	057022	057022	057022	057022	057022	057022	057022	057022
11	Housing, Pump-Mach	1		057018	057018	057018	057018	057018	057018	057018	057018	057018	057018
12	• Seal Asm, Shaft-Blister Pak	1		267027	267027	267027	267027	267027	267027	267027	267027	267027	267027
13	Impeller "57"	1		057010	057010	057010	057010	057010	057010	057010	057010	057010	057010
14	Base Asm	1		057029	057029	057029	057029	057029	057029	057029	057029	057029	057029
15	Plate, Strainer-Plastic	1		001082	001082	001082	NA	NA	001082	001082	001082	NA	NA
16	Case Handle & Arm "50"	1	3	054092	054092	004703	004703	004703	054093	054093	004703	004703	004703
17	• Plug, Test-White	2		034090	034090	034090	034090	034090	034090	034090	034090	034090	034090
18	• Arm & Seal Asm "50"	1	3	054080	054080	004704	004704	004704	054080	054080	004704	004704	004704
19	Case & Switch "50"	1	3,7	054051	054051	004702	004702	004702	054053	054053	004702	004702	004702
20	Guard "50"	1	3	034016	034016	004617	004617	004617	034016	034016	004617	004617	004617
21	• Seal, Thru Wall Term	2		003402	003402	003402	003402	003402	003402	003402	003402	003402	003402
22	Housing, Mtr- & Term Asm "50"	1		057014	002335	004712	004712	004712	057014	002335	004712	004712	004712
23	Float-Polypropylene	1		034019	034019	034019	034019	034019	034019	034019	034019	034019	034019
24	Rod, Float-Molded "50"	1		054062	054062	054062	054062	054062	054062	054062	054062	054062	054062
25	Guide Asm, Flt Rod	1		034086	034086	034086	034086	034086	034086	034086	034086	034086	034086
26	Switch Asm "50"	1	3	034061	034061	004705	004705	004705	034061	034061	004705	004705	004705
27	• Wire Asm-F-P(1)Wire Rs2.25"Lg	1		002231	002231	NA	NA	NA	002231	002231	NA	NA	NA
27	• Screw, #10-24 X.75 RHM-SI SS	12		001885	001885	001885	001885	001885	001885	001885	001885	001885	001885
28	• Screw, #6-32x.438Rhsltp"1" Stlzi	2		001877	001877	004644	004644	004644	001877	001877	004644	004644	004644
29	• Screw, #6-32x.25RHM SI Tc Stlgr	3		001877	001877	001877	001877	001877	001877	001877	001877	001877	001877
30	• Sem, 10-24x.375HH-SI Tc.688Wash	3		002000	002000	002000	002000	002000	002000	002000	002000	002000	002000
	• Rebuild Kit "57/59"	1		057059	057059	004716	004716	004716	057059	057059	004716	004716	004716

• Items included in Rebuild Kit. ☐ Not Shown in Illustration. § Not sold separately.

NOTES:

- 1) Strain Relief (Item 2) can be purchased separately, but is included with Cord, Terminal & Seal Assembly (Item 4) and with Seal, Cord Assembly (Item 3).
- 2) Specify GE or Emerson Motor. GE motor can be identified by white valox insulation on stator. Emerson can be identified by green epoxy insulation on stator.
- 3) When ordering these parts, customer must identify if switch is a General Electric switch.
- 4) See FM0160 Parts Price Sheet for listing of parts prices.
- 5) "NA" indicates, not applicable.
- 6) If an "X" follows Model No., or Date Mfg. on brass ID tag, consult factory for ordering any parts.
- 7) For pumps with date code prior to 9/86 the replacement case & switch will have a new style switch.

Special Length Cords		
Length	M57 -C thru E	D57 -C thru E
15' cord	005566	004940
20' cord	014530	Consult factory
25' cord	004991	Consult factory
35' cord	Consult factory	Consult factory
50' cord	N/A	Consult factory

DATE CODE OF MANUFACTURE FROM 12/70 to 12/88				
1st LETTER MONTH		2nd LETTER YEAR		
M -- JAN.	T -- JULY	A -- 1971	G -- 1977	O -- 1983
N -- FEB.	U -- AUG.	B -- 1972	H -- 1978	P -- 1984
O -- MARCH	V -- SEPT.	C -- 1973	I -- 1979	R -- 1985
P -- APRIL	W -- OCT.	D -- 1974	J -- 1980	S -- 1986
R -- MAY	X -- NOV.	E -- 1975	M -- 1981	T -- 1987
S -- JUNE	Y -- DEC.	F -- 1976	N -- 1982	U -- 1988

NOTE: Four digit (MMYY) date of mfg. used after June, 1988.
IE: MMYY = 0192 = Jan. 1992

REPLACEMENT PARTS LIST FOR MODELS "N57" and "E57".

See back page for "N57" and "E57" illustration.

MODELS:				N57	N57-A	N57-B	N57-C	N57-D	E57	E57-A	E57-B	E57-C	E57-D
REF. NO.	DESCRIPTION	QTY	NOTES	8/79 UI thru 12/80 YJ	1/81 MM thru 8/86 US	9/86 VS thru 3/87 OT	4/87 thru 6/92	7/92 thru Current	8/79 UI thru 12/80 YJ	1/81 MM thru 8/86 US	9/86 VS thru 3/87 OT	4/87 thru 6/92	7/92 thru Current
1	• Gasket, Case/Cover	1		034046	034046	034046	034046	034046	034046	034046	034046	034046	034046
2	• Clamp, Strain Relief-Red	1	1	001770	001770	001770	001770	001770	001770	001770	001770	001770	001770
3	• Seal, Cord-Asm	1	1	054025	002326	004322	004322	004322	054025	002326	004322	004322	004322
4	Cord Term & Seal	1	1	054069	002319	004708	004708	004708	054070	002318	004709	004709	004709
5	{ Stator GE	1	2	054040	054040	054040	054040	007951	054050	054050	054050	054050	007952
	{ Stator Emerson	1	2	002473	002473	002473	002473	007953	005530	005530	005530	005530	007954
6	• Screw, #8-32 X 2.563 RHPI-Stlbo	2		001914	001914	001914	001914	001914	001914	001914	001914	001914	001914
7	{ Rotor Asm GE	1	2	054032	054032	054032	054032	054032	054032	054032	054032	054032	054032
	{ Rotor Asm Emerson	1	2	003735	003735	003735	003735	003735	003735	003735	003735	003735	003735
8	• Seal, Mtr Hsg	1		034007	034007	034007	034007	034007	034007	034007	034007	034007	034007
9	• Washer, Trst-Nyl. 875X.504X.050"	1		002140	002140	002140	002140	002140	002140	002140	002140	002140	002140
10	• Oil, Dielectric-(19 Oz Can)	1		057022	057022	057022	057022	057022	057022	057022	057022	057022	057022
11	Housing, Pump-Mach	1		057018	057018	057018	057018	057018	057018	057018	057018	057018	057018
12	• Seal, Thru Wall Term	1		267027	267027	267027	267027	267027	267027	267027	267027	267027	267027
13	Impeller "57"	1		057010	057010	057010	057010	057010	057010	057010	057010	057010	057010
14	Base Asm	1		057029	057029	057029	057029	057029	057029	057029	057029	057029	057029
15	Plate, Strainer-Plastic	1		001082	001082	001082	NA	NA	001082	001082	001082	NA	NA
16	Cover & Handle "50"	1		034067	034067	034067	034067	034067	034067	034067	034067	034067	034067
17	• Plug, Test-White	2		034090	034090	034090	034090	034090	034090	034090	034090	034090	034090
18	• Seal, Thru Wall Term	2		003402	003402	003402	003402	003402	003402	003402	003402	003402	003402
19	Housing, Mtr- & Term Asm "50"	1		057014	002335	004712	004712	004712	057014	002335	004712	004712	004712
20	• Screw, #10-24 X.75 RHM-SI SS	12		001885	001885	001885	001885	001885	001885	001885	001885	001885	001885
21	• Sem, 10-24x.375HH-SI Tc.688Wash	3		002000	002000	002000	002000	002000	002000	002000	002000	002000	002000
22	• Screw, #6-32x.25RHM SI Tc Stlgr	1		001877	001877	001877	001877	001877	001877	001877	001877	001877	001877
▣	Rebuild Kit "57"	1		057059	057059	004716	004716	004716	057059	057059	004716	004716	004716

• Items included in Rebuild Kit.

▣ Not Shown in Illustration.

§ Not sold separately.

Special Length Cords		
Length	N57 -B thru D	E57 -B thru D
20' cord	011693	Consult factory
25' cord	013046	Consult factory
35' cord	019471	Consult factory
50' cord	N/A	Consult factory

NOTES:

- 1) Strain Relief (Item 2) can be purchased separately, but is included with Cord, Terminal & Seal Assembly (Item 4) and with Seal, Cord Assembly (Item 3).
- 2) Specify GE or Emerson Motor. GE motor can be identified by white valox insulation on stator. Emerson can be identified by green epoxy insulation on stator.
- 3) See FM0160 Parts Price Sheet for listing of parts prices.
- 4) "NA" indicates, not applicable.
- 5) If an "X" follows Model No., or Date Mfg. on brass ID tag, consult factory for ordering any parts.




PUMP COMPANY

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
 SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com


Your Peace of Mind is Our Top Priority™

REPLACEMENT PARTS ILLUSTRATION FOR MODELS "M57" AND "D57"

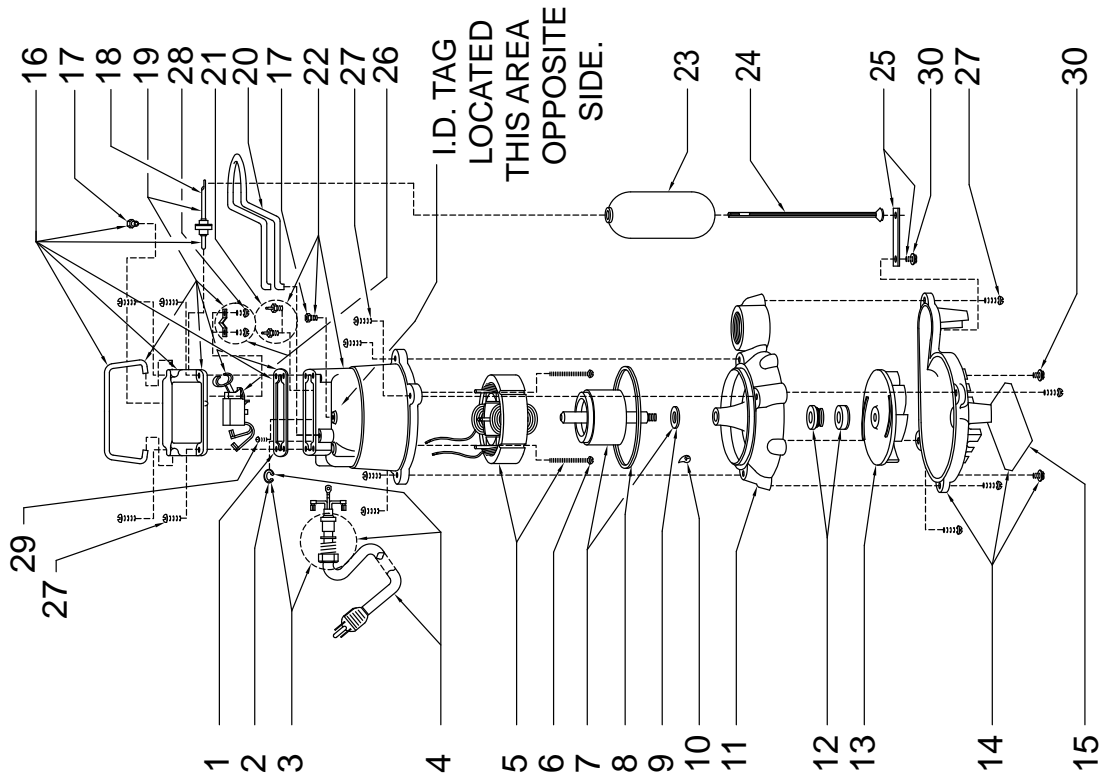

SKA271

REPLACEMENT PARTS ILLUSTRATION FOR MODELS "N57" AND "E57"

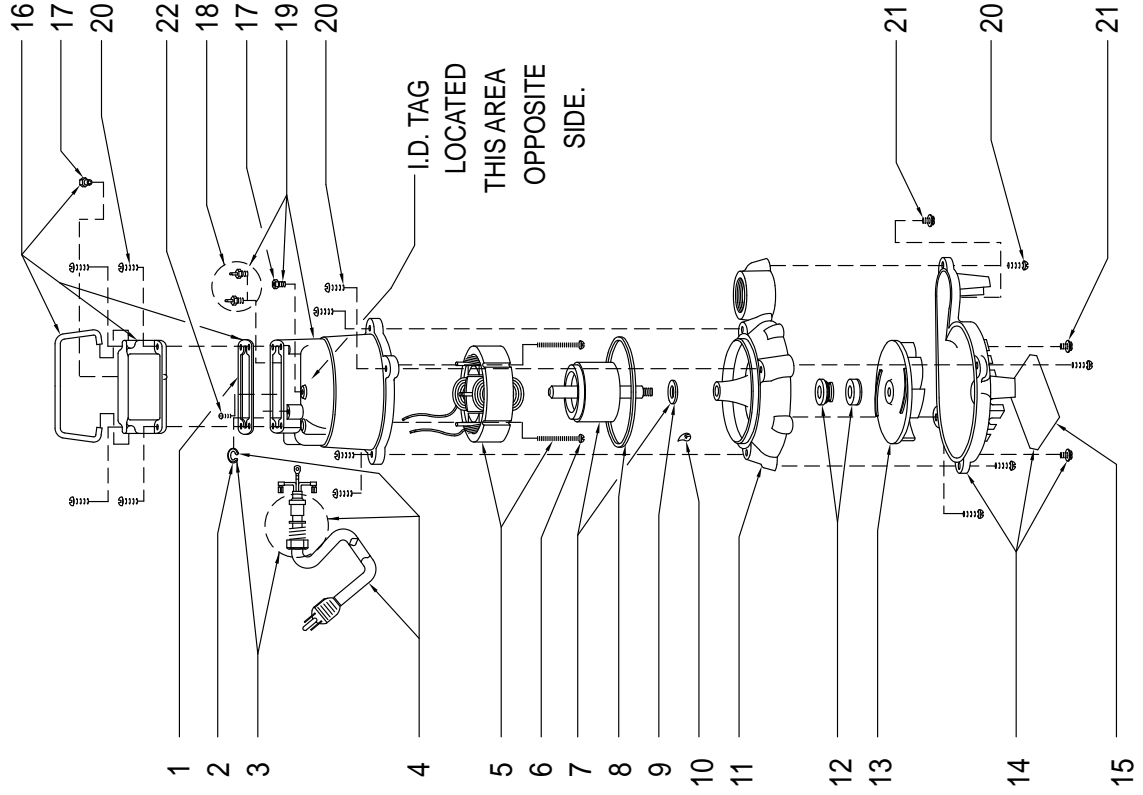

SKA908