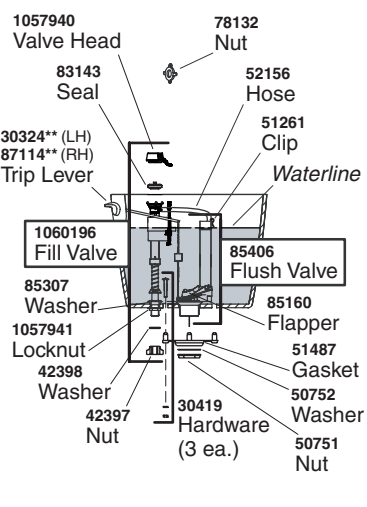


SYMPTOMS	CORRECTIVE ACTION	PARTIAL SERVICE PARTS
1. Poor flush.	A. Adjust tank water level to match the waterline. B. Fully open water supply shut-off valve. C. Clear obstruction in trapway, jet, or bowl rim holes. D. Clear obstruction in soil pipe or vent pipe.	 <p>Diagram labels and part numbers:</p> <ul style="list-style-type: none">1057940 Valve Head78132 Nut83143 Seal52156 Hose51261 Clip30324** (LH) Trip Lever87114** (RH) Trip LeverWaterline1060196 Fill Valve85406 Flush Valve85307 Washer85160 Flapper1057941 Locknut42398 Washer51487 Gasket42397 Nut30419 Hardware (3 ea.)50752 Washer50751 Nut
2. No flush.	A. Reconnect the flapper chain to the trip lever or flush valve. B. Adjust flapper chain assembly to remove excess slack.	
3. Fill valve turns on/off by itself without toilet being flushed, or runs allowing water to enter tank.	A. Adjust flapper chain for proper slack so flapper is not held off flush valve seat. B. Clean or replace flapper if flapper is worn, dirty, or misaligned with flush valve seat or flush valve seat is damaged. Replace flush valve seal or flush valve. C. Remove tank and tighten flush valve nut if flush valve gasket is leaking. Do not overtighten. If leakage continues, replace gasket. D. Clean fill valve seat/seat washer of debris, or replace piston/seat washer assembly. E. Replace fill valve if valve float sinks. F. Adjust tank water level if too high.	
4. Long tank fill cycle.	A. Fully open water supply shut-off valve. B. Clean fill valve inlet, valve head, or supply line. Flush lines.	
5. Noisy tank fill cycle.	A. Partially close the water supply shut-off valve if water pressure to the toilet is too high. Check toilet performance following any such adjustment. B. Remove dirt or obstruction in valve head, flush line.	
IMPORTANT: Use only genuine Kohler parts as shown to avoid property damage.		**Finish/color code required.
If unable to correct the problem, contact Customer Service: 1-800-4-KOHLER (USA), 1-800-964-5590 (Canada), or www.kohler.com .		