



B&G Circulating Pumps HV, PR, 2, 2½, LD3, HD3 & PD

Pump Capacities for HV, PR, 2, 2½, LD3, HD3, and PD (GPM at Feet of Head)

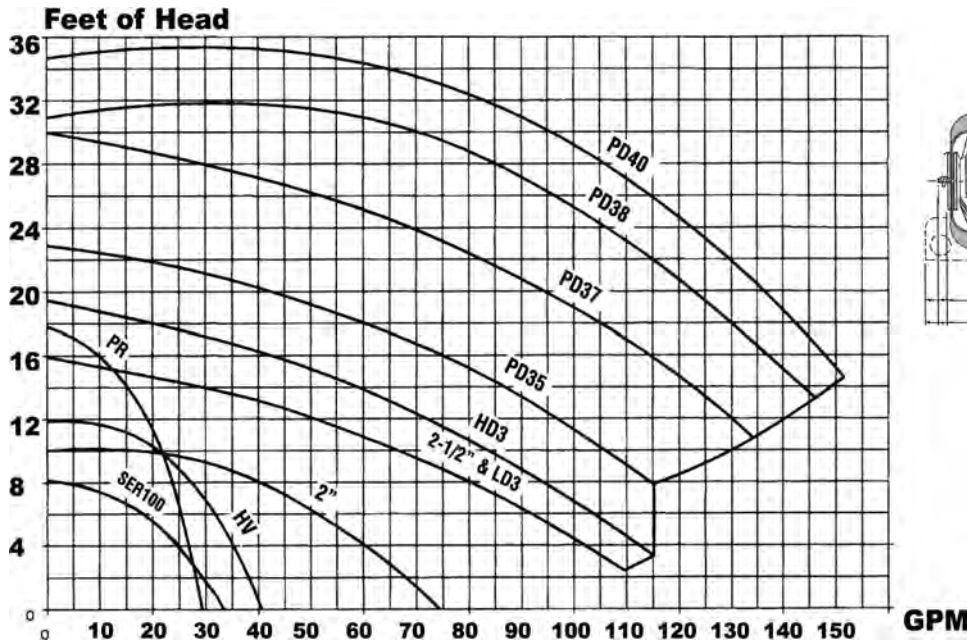

Pump Dimension Guide

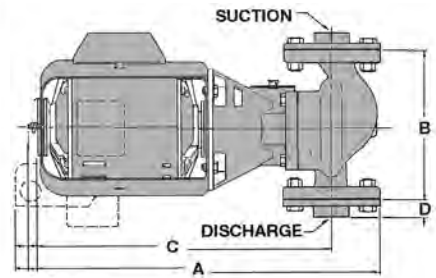

The suction and discharge sizes are dependent on the size of the pump flange used:

- The HV and PR pumps can use pump flange sizes from ¾" to 1-½".
- No. 2 pumps use 2" flanges;
- No. 2½ pumps use 2-1/2" flanges.
- The LD, HD and PD pumps all use 3" flanges.
- New pumps include flange bolts and flange gaskets.

Series PR, HV, 2, 2-1/2, LD3, HD3 and PD Booster Pumps

Pump Models HP & Phase	Red Iron Pump for space heat			Bronze Pump for domestic water			Flange Sizes Order separately	Pump Dimensions (in.)			Weight (lbs)	
	*Model No.	Pump No.	Order No.	*Model No.	Pump No.	Order No.		A	B	C	Iron Body	Bronze Body
PR 1/6 hp, 1 ph	PR	102206	BH1023	PR AB	102208	BH1024	¾, 1, 1¼, 1½"	15-1/4	8-1/2	12-3/4	30	32
HV 1/6 hp, 1 ph	HV NFI	102210	BH1035	HV BNFI	102213	BH1030		15-3/8	8-1/2	13	28	30
No. 2 1/6 hp, 1 ph	2 NFI	102214	BH1015	2 AB	102233	BH1020A	2"	16-5/8	8-1/2	14	36	39
				2 BNFI	102217	BH1020						
No. 2½ 1/4 hp, 1 ph	2½	102218	BH1022	2½ AB	102220	BH1022A	2½"	17-1/4	10	14	54	58
LD3 1/4, 1 ph	LD3	102222	BH1022B	LD3 AB	102224	BH1022C	3"	17-1/4	10	14	53	57
HD3 1/3 hp, 1 ph	HD3	102226	BH1022D	HD3 AB	102228	BH1022E		17-1/2	10	14-1/4	55	59
PD-35S 1/2 hp, 1 ph	PD35S	105089	BH1100A	PDB35S	105092	BH1100B		20-1/4	12	16-7/8	75	80
PD-35T 1/2 hp, 3 ph	PD35T	105093	BH1110A	PDB35T	105096	BH1110B		20-1/4	12	16-7/8	75	80
PD-37S 3/4 hp, 1 ph	PD37S	105097	BH1120A	PDB37S	105100	BH1120B		20-1/4	12	16-7/8	75	80
PD-37T 3/4 hp, 3 ph	PD37T	105101	BH1130A	PDB37T	105104	BH1130B		20-1/4	12	16-7/8	75	80
PD-38S 1 hp, 1 ph	PD38S	105121	BH1140	PDB38S	105123	BH1140A		24	14-1/2	19-1/2	128	138
PD-38T 1 hp, 3 ph	PD38T	105133	BH1150	PDB38T	105104	BH1150A		24-1/4	14-1/2	19-3/4	125	135
PD-40S 1½ hp, 1 ph	PD40S	105151	BH1160	PDB40S	105153	BH1160A		24-5/8	14-1/2	20-1/8	130	140
PD-40T 1½ hp, 3 ph	PD40T	105137	BH1170	PDB40T	105139	BH1170A		25-1/8	14-1/2	20-5/8	127	137

*The NFI at end of "Model No." = plastic impeller; AB = all bronze pump with a bronze impeller.
1 phase motors are 115V on the models 2, 2½ and LD3, and 115/230V on the other 1 phase models.
The 3 phase model pumps are all tri-voltage: 115-230/460 volts. The PDB pumps have bronze impellers.

Complete repair and accessory guides are found on the following pages.