


Submitted Model No.: \_\_\_\_\_\_\_Specific Features: \_\_\_\_\_\_



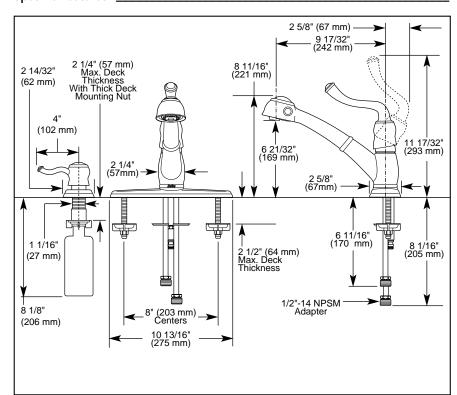

## KITCHEN FAUCETS

- Saxony<sup>™</sup> Pull-Out Series
- Single Handle Deck Mount
- 1,2,3 or 4 Hole Sink Applications
- Quick Snap® Hose Installation

## STANDARD SPECIFICATIONS:

- Single handle kitchen faucets for exposed mounting on 1, 2, 3, or 4 hole sinks.
- · Solid brass fabricated body.
- Centermount or 8" (203 mm) centers with optional included 10 13/16" (275 mm) long escutcheon.
- 8 11/16" (221 mm) high, 9 17/32" (242 mm) long spout [includes 6 15/32" (164 mm) long pull-out spray] nestled in all brass hub assembly, swings 120°
- Spout is connected to valve body with a 59" (1524 mm) long hose that extends to 38" (965 mm) usable length.
- Pull-out spout operates in an aerated or spray mode via an easy side-to-side push lever.
- Lever handle shall return to neutral position when faucet is turned off.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Quick Snap® hose installation.
- Touch-Clean® sprayhead.
- 3/8" O.D. straight, staggered copper supply tubes 6 11/16" (170 mm) and 8 3/32" (206 mm) long.
- Standard with 1/2"-14 NPSM adapters.
- Integral double check valves in spout.

## WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

## **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1 Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- · CSA Certified









Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2006 Masco Corporation of Indiana