

Dayton® Premium Double Bowl Sink Model DPC2250R

GENERAL

Sink is formed of #20 (1mm) gauge, type 301, nickel-bearing

stainless steel. Top mount. **DESIGN FEATURES**

Bowl Depth: 8" (203mm) Rim Height: 1/4" (6.3mm)

Coved Corners: 3" (76mm) vertical and 2-1/4" (57mm) horizontal

radius

Finish: Exposed surfaces are polished to a Premium Highlighted

Satin finish.

Underside: Fully undercoated to dampen sound and reduce

condensation.

OTHER

Drain Opening: 3-1/2" (89mm)

OPTIONAL ACCESSORIES

Bottom Grid: GBG1318SS (large bowl), GBG1415SS (small bowl) Cutting Boards: CB1516 (small bowl), CBR1316 (large bowl)

Drain: D1125

Rinsing Baskets: LKWRB1316SS (small bowl), LKWRB1318SS

(large bowl), LKWERBSS (either bowl)


Utensil Caddy:LKWUCSS

Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.



These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the

National Plumbing Code of Canada.






SINK DIMENSIONS (INCHES)*


Model Number	Overall		Inside Left Bowl			Inside Right Bowl			Cutout in Countertop (1-1/2" (38mm) Radius Corners)		No. of 1-1/2" (38mm) Dia. Faucet	Minimum Cabinet
	L	W	L	W	D	L	W	D	L	W	Holes	Size
DPC2250R	33 (838mm)	22 (559mm)	13-1/2 (343mm)	18-1/4 (464mm)	8 (203mm)	14 (356mm	15-3/4) (400mm)	8 (203mm)	32-3/8 (822mm)	21-3/8 (543mm)	1, 2, S2 3, or 4	36 (914mm)


*Length is left to right. Width is front to back.



Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

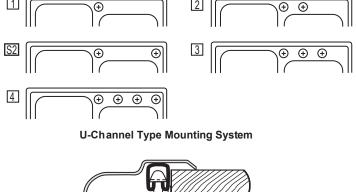



In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.