

### **Features**

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Concealed trapway facilitates easy cleaning and enhances design.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- Glenbury<sup>™</sup> Quiet-Close<sup>™</sup> seat with Quick-Release<sup>™</sup> functionality allows seat to close quietly and quickly unlatch from the toilet for easy removal and convenient cleaning.
- 2-1/8-inch glazed trapway.
- 1.28 gallons per flush (gpf).
- Includes Polished Chrome lift knob.
- Supply line not included.
- Coordinates with other products in the Portrait collection.

### Technology

- Single-flush gravity uses the force of gravity and a precision-engineered tank, bowl, and trapway to create a strong siphon during flushing.
- AquaPiston canister allows water to flow into the bowl from all sides (360 degrees), increasing the power and effectiveness of the flush.
- Flush valve's 3: 2 ratio harnesses the natural force of gravity and optimizes flush performance.
- Durable canister design has 90% less exposed seal material than a 3-inch flapper, for leak-free performance.
- Light-touch canister flush requires a lower actuation force than a flapper.

# Installation

Standard 12-inch rough-in.

### **Optional Accessories**

K-7677

### Components

Additional included component/s: Tank valves, Aqua Piston® valves, Low profile bolt caps, Top-mount lift trip lever, and Seat.





## Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC)

# **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.


### **Available Color/Finishes**

Color tiles intended for reference only.

| Color | Code | Description   |
|-------|------|---------------|
|       | 0    | White         |
|       | 96   | Biscuit       |
|       | 47   | Almond        |
|       | NY   | Dune          |
|       | 95   | Ice™ Grey     |
|       | G9   | Sandbar       |
|       | 33   | Mexican Sand™ |
|       | K4   | Cashmere      |
|       | 58   | Thunder™ Grey |
|       | 7    | Black Black™  |



K-3826

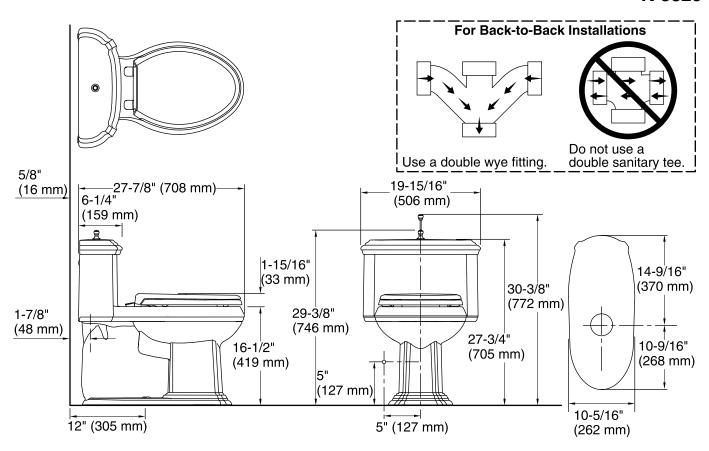

### **Technical Information**

All product dimensions are nominal.

Toilet type: One-piece

Bowl shape: Elongated front

Flush type: AquaPiston

Seat hinge type: Quick-Release™

Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 10-3/4" x 6-3/4" (273 mm x 171 mm)

Rim to water surface: 6" (152 mm)
Rough-in: 12" (305 mm)
Seat-mounting holes: 5-1/2" (140 mm)

# **Fixture Supply Requirements**

Min static pressure: 20 psi (137.9 kPa)
Max static pressure: 80 psi (551.6 kPa)
Min flowing pressure: 20 psi (137.9 kPa)
Min flow rate: 0.5 gpm (1.9 lpm)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45 degree double wye fitting.

