STYLLIS SERIES TUB / SHOWER



60-INCH MODEL

TS-6036


| Rough-In Dimensions | 60" wide x 37-1/4" deep x 79-1/4" high (w/ 18-1/4-inch apron) |
|-------------------------------------|--|
| Finished Dimensions | 60" wide x 36" deep x 78" high (w/ 18-1/4-inch apron) |
| Unit Features NAHB RESEARCH CENTER | One - Piece Fiberglass Composite Construction Sanitary Grade Polyester Gelcoat Surface 2" Dia. Drain / RH or LH (see reverse side for location) 2-1/2" Dia. Overflow (see reverse side for location) Generous, Multi-Level Back Wall Shelving Extra Deep Bathing Sump Textured Floor Pattern 1/2-inch Balsa Wood Core Floor Structure |
| Special Notes | Optional ABF Model (provides 3-1/2-Inches of drain clearance) UL Listed Whirlpool System Available (see following pages) |



Order No.: TS-6036R (RH drain / 18-1/4" apron) TS-6036L (LH drain / 18-1/4" apron)

TS-6036R ABF (RH drain / 20" apron) TS-6036L ABF (LH drain / 20" apron)

60" x 36", one-piece gelcoated fiberglass tub/shower with 18-1/4" apron (1-3/4" drain clearance), multi-level back wall shelves, contoured head rest, and drain on end indicated.

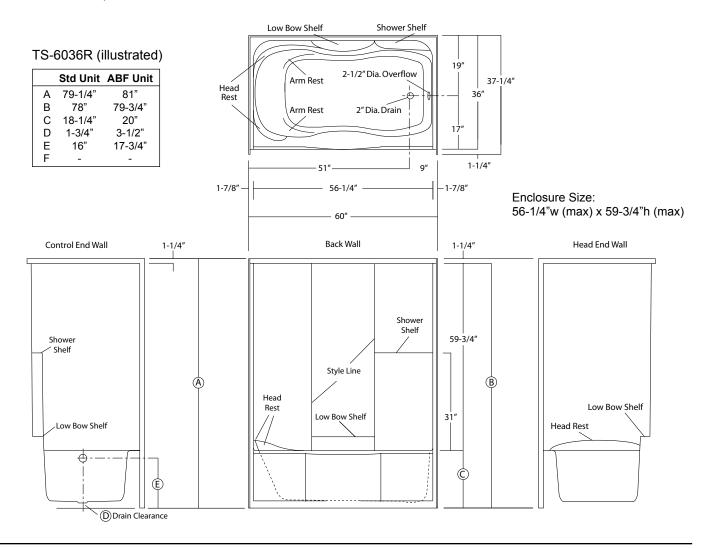

Package Order No.: **CWS (Carress System)**

Package includes: 4-Adjustable side jets, 4-micro pulse foot jets, 2-micro pulse back jets, variable flow control, twin air controls, electronic system control, and 13.5 amp pump/motor.

System In-Line Heater (1*) (order: ILH-STR) Options: Ozone Generator (1*) (order: OZG)

Chromatherapy Pkg (1*, 2*) (order: CLT) Water Level Sensor (1*, 2*) (order: LWV)

Trim Upgrade (1*)

Chrome (order: CWS-CHR) Brushed (Satin) Nickel (order: CWS-SNK)


Removable access panel currently not available for this model.

Sump Dimensions: 50" long x 22-1/4" wide x 15-7/8" deep 60 gal. (unoccupied - to overflow) Sump Capacity:

Whirlpool Operating: 45 gal.

Notes: (1*) Factory installed options

(2*) Includes system control upgrade



Photographic images may include optional components and appear different than actual product.

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: +0 / -3/8 inch).

Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation