STERLING.


Features

- Compression molded from our exclusive solid Vikrell_® material
- Modular 4-piece design
- Pivot "snap together" installation
- Convenient shelves provide generous storage
- Durable high-gloss finish
- 10-year consumer/3-year commercial limited warranty
- Caulkless seam installation
- 36-1/4" (92.1 cm) x 37-1/4" (94.6 cm) x 77" (195.6 cm) rough-in dimensions include nailing flange
- 36" (91.4 cm) x 36" (91.4 cm) x 75-3/4" (192.6 cm) complete unit finished dimensions

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- CSA B45



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
72240100	36" (91.4 cm) shower receptor and wall surround	• 0	Other
Model	Wall Component Description	Colors/Finishes	
72242100	36" (91.4 cm) backwall	0 🗆	Other
72241100	36" (91.4 cm) receptor	0 🗆	Other
72245100	Endwall set	• 0	□ Other
Model	Age in Place Component Description	Colors/Finishes	
72240106	36" (91.4 cm) shower receptor with age in place backers	0 🗆	Other
72245106	Endwall set, age in place backers	0 🗆	Other

36" (91.4 cm) SHOWER RECEPTOR AND WALL SURROUND **72240100**



ACCORD®


Technical Information

Model	door maximum width	door maximum height
72240100	32-5/8" (82.9 cm)	72" (182.9 cm)

Installation Notes

Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

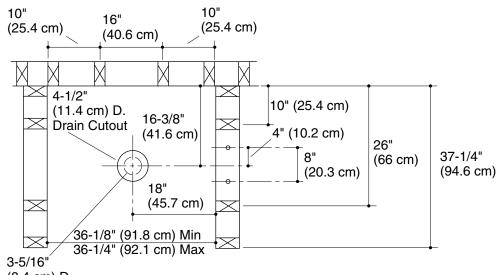


End stud positioning is critical.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown.

Receptor cannot be installed without the wall surround.

(8.4 cm) D. Drain Hole

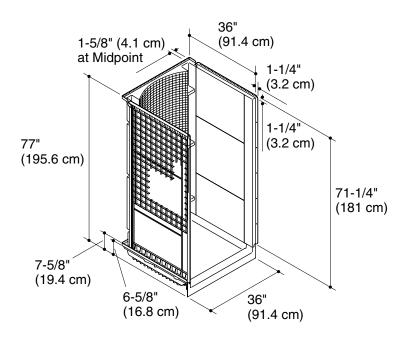

Product Diagram

